



EUROPEAN GNSS (GALILEO) INITIAL SERVICES

OPEN SERVICE

QUARTERLY PERFORMANCE REPORT

JULY - SEPTEMBER 2018

Copyright © European Union, 2018

This document and the information contained in it is subject to applicable copyright and other intellectual property rights under the laws of the Belgium and other states. This document and information contained in this document may be excerpted, copied, printed, republished, made available to the public by wire or wireless means and/or otherwise provided to third parties only under the condition that the source and copyright owner is clearly stated as follows: “Source: Galileo Public Report © European Union, 2018”. If you do republish we would be grateful if you link back to the GSA website www.gsa.europa.eu. No part of this document, including any part of the information contained therein, in whichever format, whether digital or otherwise, may be altered, edited or changed without prior express and written permission of the European Union, to be requested via the European GNSS Agency, to be requested via <https://www.gsa.europa.eu/contact-us>, clearly stating the element (document and/or information) and term of use requested. For reproduction or use of photos and any other artistic material, permission may have to be sought directly from the copyright holder.

The designations employed, the representation of the materials and the views expressed by authors, editors, or expert groups, other EU agencies and/or their staff members or other third parties, do not necessarily represent the opinions or the stated policy of either GSA or the European Union. The mention of specific companies or of certain manufacturers’ products does not imply that they are endorsed or recommended by the GSA or the European Union in preference to others of a similar nature that are not mentioned. Errors and omissions excepted, the names of proprietary products and copyright holders are distinguished by initial capital letters.

Without prejudice to the terms and conditions of Galileo Open Service available here https://www.gsc-europa.eu/system/files/galileo_documents/Galileo-OS-SDD.pdf, the content of this report provides the characterisation of the Galileo Open Service performance during the reported period using the various means and tools available at the European GNSS Agency, and is deemed correct. Notwithstanding, the European GNSS Agency and the European Union do not assume any responsibility or liability derived from the accuracy of the data contained therein to the extent permitted by the applicable law.

Should you become aware of any breach of the above terms of use, please notify the European GNSS Agency immediately, through the above-mentioned contact site. Any breach of these terms of use may be subject to legal proceedings, seeking monetary damages and/or an injunction to stop the unlawful use of the document and/or any information contained therein.

The above terms of use shall be governed by the EU law and the national substantive law of Belgium. The courts of Brussels shall have jurisdiction to give judgement for any claims arising out of these terms of use.

By downloading, forwarding, and/or copying this document or any parts thereof, in whichever format, whether digital or otherwise, the user acknowledges and accepts the above terms of use as applicable to him/her.



TABLE OF CONTENTS

1	INTRODUCTION.....	1
2	EXECUTIVE SUMMARY	4
3	INITIAL OPEN SERVICE RANGING PERFORMANCE	7
3.1	Availability of the Galileo SF/DF Ranging Service.....	7
3.2	Per-slot Availability of HEALTHY Signal in Space	8
3.3	Galileo Signal in Space Ranging Accuracy	9
4	UTC DISSEMINATION AND GGTO DETERMINATION PERFORMANCE	12
4.1	Availability of the Galileo Time Correlation Parameters	12
4.2	Accuracy of Galileo Time Correlation Parameters.....	14
5	GALILEO POSITIONING PERFORMANCE	17
5.1	Availability of Global Horizontal Dilution of precision (HDOP).....	17
5.2	Availability of Galileo Horizontal Positioning.....	18
5.3	Galileo measured Positioning Performance.....	19
6	TIMELY PUBLICATION OF NOTICE ADVISORY TO GALILEO USERS (NAGUS).....	26
7	REFERENCES.....	28
8	LIST OF ACRONYMS.....	29

LIST OF FIGURES

Figure 1: Monthly Availability of the Galileo SF/DF Ranging Service	7
Figure 2: “Per-Slot” availability of HEALTHY Signal in Space for the reporting period	8
Figure 3: Monthly Galileo SIS Ranging Accuracy (95 th percentile) “for any satellite”, measured during reporting period for worst-case, Dual-Frequency (DF)	10
Figure 4: Monthly Galileo SIS Ranging Accuracy (95 th percentile) “for any satellite”, measured during the reporting period for worst-case, Single-Frequency (SF)	10
Figure 5: Monthly Galileo SIS Ranging Accuracy (95 th percentile) “over all satellites” (constellation average), measured during the reporting period	11
Figure 6: Monthly availability of the UTC Determination Service during the reporting period	12
Figure 7: Annually normalised availability of the GGTO Determination, during the reporting period	13
Figure 8: 95 th Long-term 95% percentile of UTC Time Dissemination Accuracy	14
Figure 9: Long-term 95 th percentile of GGTO Determination Accuracy	15
Figure 10: Long-term 95 th percentile of UTC Frequency Dissemination Accuracy	16
Figure 11: Availability of HDOP ≤ 5	17
Figure 12: Availability of the Galileo Horizontal Positioning Service with Accuracy ≤ 10 [m]	18
Figure 13: Horizontal Positioning Error (HPE) for “Galileo-only” users in July 2018	20
Figure 14: Horizontal Positioning Error (HPE) for “Galileo-only” users in August 2018	21
Figure 15: Horizontal Positioning Error (HPE) for “Galileo-only” users in September 2018	22
Figure 16: Vertical Positioning Error (VPE) for Galileo only users in July 2018	23
Figure 17: Vertical Positioning Error (VPE) for Galileo only users in August 2018	24

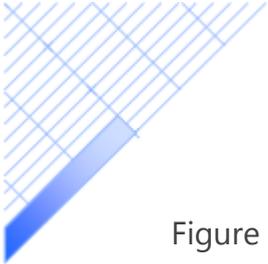


Figure 18: Vertical Positioning Error (VPE) for Galileo only users in September 2018 25

LIST OF TABLES

Table 1a: Galileo Reported Constellation Information 2

Table 1b: New Galileo Space vehicles under commissioning 2

Table 2: GSC main information web pages for Galileo status..... 3

Table 3: MPL Fulfilment Status Dashboard (1/2) 4

Table 4: MPL Fulfilment Status Dashboard (2/2) 5

Table 5: GSC web pages for Galileo User Notifications (NAGUs) 26

Table 6: NAGUs published during Quarter 27

1 INTRODUCTION

This document is the *Galileo Initial Open Service (IS OS) Public Performance Report* for the period of July, August and September 2018. Following the declaration of Initial Services in December 2016, a new edition is published after each quarter, in order to provide the public with information about the Galileo Open Service measured performance statistics.

The document reports on the following performance parameters, with respect to their Minimum Performance Levels (MPLs) declared in the [OS-SDD]:

- ◇ Galileo Initial Open Service Ranging Performance;
- ◇ Galileo UTC Dissemination and GGTO Determination Performance;
- ◇ Galileo Positioning Performance;
- ◇ Timely Publication of Notice Advisory to Galileo Users (NAGUs)¹.

The document comprises the following sections:

Section 1: Provides an introduction to this report, including the status of the Galileo constellation over the quarterly reporting period.

Section 2: Provides an executive summary describing the achieved performance. Details are reported in the following chapters

Section 3: The Initial Open Service Ranging Performance comprises three subsections: “Availability of the Galileo SF/DF Ranging Service”, “Per-slot Availability of HEALTHY Signal in Space” and “Galileo Signal in Space Ranging Accuracy”.

Section 4: The “UTC Dissemination and GGTO Determination Performance” is presented in two subsections: the “Availability of the Galileo Time Correlation Parameters” and the “Accuracy of Galileo Time Correlation Parameters”. Performance is evaluated for the Universal Time Coordinated (UTC) Time & Frequency Dissemination service and the GST-GPS Time Offset (GGTO) Determination.

Section 5: The “Galileo Positioning Performance” is illustrated in three subsections: “Availability of Global Horizontal Dilution of precision (HDOP)”, “Availability of Galileo Horizontal Positioning” and “Galileo measured Positioning Performance”.

Section 6: The “Timely Publication of Notice Advisory to Galileo Users (NAGUs)” is analysed.

Section 7: The cited reference documents are listed.

Section 8: The adopted terms, acronyms and abbreviations are defined.

¹ NAGUs are issued publicly by the European GNSS Service Centre (GSC)

Table 1a: provides the status of the Galileo constellation for which the performance data has been measured over the reporting period.

Satellite Code	SV ID (PRN)	CCSDS ID [hex]	Orbital Slot	Status
GSAT-0101	11	3A5	B05	Available
GSAT-0102	12	3A6	B06	Available
GSAT-0103	19	3A7	C04	Available
GSAT-0203	26	263	B08	Available
GSAT-0205	24	265	A08	Available
GSAT-0206	30	266	A05	Available
GSAT-0207	7	267	C06	Available
GSAT-0208	8	268	C07	Available
GSAT-0209	9	269	C02	Available
GSAT-0210	1	26A	A02	Available
GSAT-0211	2	26B	A06	Available
GSAT-0212	3	26C	C08	Available
GSAT-0213	4	26D	C03	Available
GSAT-0214	5	26E	C01	Available
GSAT-0216	25	2C6	A07	Available since August 2 nd
GSAT-0217	27	2C7	A04	Available since August 2 nd
GSAT-0218	31	2C8	A01	Available since August 2 nd

Table 1a: Galileo Reported Constellation Information

Satellite Code	SV ID (PRN)	CCSDS ID [hex]	Orbital Slot	Status
GSAT-0215	21	2C5	A03	Under commissioning ²
GSAT-0219	E36	713	B04	Under commissioning
GSAT-0220	E13	704	B01	Under commissioning
GSAT-0221	E15	705	B02	Under commissioning
GSAT-0222	E33	706	B07	Under commissioning

Table 1b: New Galileo Space vehicles under commissioning

² GSAT-0215 was declared available for the provision of Navigation services after the reporting period, since 12/10/2018

For the most up-to-date information about the Galileo Constellation, please refer to the information published by the European GNSS Service Centre (GSC) on its website:

GNSS Service Centre Web Resources	
Constellation Status Information	https://www.gsc-europa.eu/system-status/Constellation-Information
Reference Constellation Orbital and Technical Parameters	https://www.gsc-europa.eu/system-status/orbital-and-technical-parameters
Incident Reporting (Galileo Incidents Report Form)	https://www.gsc-europa.eu/helpdesk/galileo-incident-report-form
Interactive support to users (Galileo Help Desk)	https://www.gsc-europa.eu/contact-us/helpdesk

Table 2: GSC main information web pages for Galileo status

The Galileo Helpdesk at GSC allows close interaction with users, both to support the exploitation of Galileo services and to collect relevant information on signal performance as observed by the users.

The GSC is also responsible for providing the timely Notice Advisory to Galileo Users (NAGU) messages, as detailed in Section 6.

2 EXECUTIVE SUMMARY

During this quarterly reporting period, the measured Galileo Initial Open Service performance figures generally exceed the Minimum Performance Level (MPL) targets specified in the [OS-SDD] with significant margins. The following dashboards summarize the compliance with MPLs, using the colour coding defined in the legend below:

OS MPLs		Target Value	July-18	August-18	September-18
OS SIS Ranging Service	Accuracy, Any Satellite	E1/E5a user	[Grid of green cells]		
		E1/E5b user	[Grid of green cells]		
		E1 user	[Grid of green cells]		
		E5a user	[Grid of green cells]		
		E5b user	[Grid of green cells]		
		≤ 7m [95%]			

Table 3: MPL Fulfilment Status Dashboard (1/2)

GSAT-0101	GSAT-0203	GSAT-0208	GSAT-0211	GSAT-0213	GSAT-0217
GSAT-0102	GSAT-0205	GSAT-0209	GSAT-0207	GSAT-0214	GSAT-0218
GSAT-0103	GSAT-0206	GSAT-0210	GSAT-0212	GSAT-0216	

Allocation of Satellites in dashboard above

Legend

[White box]	MPL measurement not available
[Green box]	Target Value for MPL is fulfilled
[Orange box]	Target Value for MPL is NOT fulfilled (less than 10% away from the Target Value)
[Red box]	Target Value for MPL is NOT fulfilled (more than 10% away from the Target Value)

OS MPLs			Target Value	Jul-18	Aug-18	Sep-18	
SIS Ranging	Accuracy, Over All Satellites	E1/E5a user		≤ 2m [95%]			
		E1/E5b user					
		E1 user					
		E5a user					
		E5b user					
	Availability	Per-slot	E1/E5a		≥ 87%		
			E1/E5b				
			E1				
			E5a				
			E5b				
		Ranging Service	SF / DF Worst Case @ WUL		≥ 87%		
Timing	Accuracy	UTC Time Dissemination		≤ 30ns [95%]			
		UTC Frequency Dissemination		< 3E-13 [95%]			
		GGTO Determination		≤ 20ns [95%]			
	Availability	UTC Determination Service		≥ 87%			
		GGTO Determination Service		≥ 80%			
User Interface	NAGU	Planned Timeliness		≥ 1 day			
		Unplanned Timeliness		≤ 3 days			

Table 4: MPL Fulfilment Status Dashboard (2/2)

Availability of the Galileo Ranging Service at the Worst User Location (WUL) had a monthly value of **100%** during the whole reporting period, which is above expectations, where the MPL is **87%**. The “per-slot” **Availability of a Healthy Signal**, with average monthly values higher than **99.14%** for every Single-Frequency (E1-B, E5a, E5b) and Dual-Frequency combination (E1/E5a, E1/E5b), is also significantly better than the MPL of **87%**. Figures are annually normalised according to the MPL definition by a moving average applied over the last 12 months.

The **Signal in Space Ranging Accuracy** shows a 95th percentile monthly accuracy between **0.29** [m] and **0.96** [m] for individual space vehicles (“Any Satellite”) on Single Frequency observables.³

³ Ranging measurements on the OS signals E1, E5a, E5b.

For Dual Frequency signal combinations⁴, the figure is in the range from **0.26** [m] to **0.79** [m]. Compliance with the [OS-SDD] MPL is achieved with large margin, with the maximum threshold fixed to **7** [m].

The average **Ranging Accuracy at constellation level** (over “All Satellites”) provides figures “per signal” that are better than **0.55** [m] for Single Frequency signals and **0.39** [m] for Dual Frequency signal combinations. The specified [OS-SDD] MPL threshold of **2** [m] is therefore achieved.

The **Availability of the Galileo UTC Time Determination Service**, with constant monthly value of **100%** over the whole reporting period, comfortably exceeds the [OS-SDD] MPL target of **87%**.

The monthly **Availability of GGTO Determination** was **98.58%** in July and August, and **98.84%** in September. Annually normalised figures provided in §4.1 are obtained with an average applied over the last 12 months. The measured values are well above the [OS-SDD] MPL target of **80%**.

Excellent values are achieved for **UTC Time Dissemination Service Accuracy** (≤ 8 [ns]), **UTC Frequency Dissemination Service Accuracy** (normalized offset $\leq 2.1 \times 10^{-14}$) and the **GGTO Determination Accuracy** (≤ 6.4 [ns]), all computed by accumulating samples over the previous 12 months. The [OS-SDD] MPL targets, which are respectively **30** [ns], 3×10^{-13} and **20** [ns], are all met.

The monthly **Availability of HDOP ≤ 5** is over **83.19%**, achieving **100%** within some geographic areas in August and September. The monthly **Availability of Galileo Horizontal Positioning better than 10 [m]** is over **89.85%**, again achieving **100%** in some areas of the world in August and September. These figures are in line with the deployment status of the Galileo constellation during the reporting period (14 operational satellites in July, then 17 since August 2nd) and greatly exceed the expected minimum threshold for Initial Services, defined in the [OS-SDD] as **50%** in both cases.

Availability figures are complemented with “Galileo-only” measured 3D positioning performance attainable when PDOP ≤ 6 . The 95th percentile of **Horizontal and Vertical 3D Positioning Errors** (HPE and VPE, correspondingly) did not exceed **2.97** [m] and **4.94** [m] respectively during the reporting period, as measured by reference receivers. In line with the [OS-SDD], no MPL is presently applicable to HPE and VPE values.

Regarding **Publication of NAGUs**, [OS-SDD] MPLs are met during the whole period for both Planned and Unplanned events. The target of at least **24** hours before the start of a scheduled event, as well as not more than **72** hours after an unscheduled one, is achieved in all cases. Additional details about NAGU timeliness are presented in § 6 .

⁴ Ranging measurements on OS signal combinations E1/E5a, E1/E5b.

3 INITIAL OPEN SERVICE RANGING PERFORMANCE

In this section of the report the following performance figures for the Galileo Initial Open Service are provided:

- ◇ Availability of the Galileo SF/DF Ranging Service.
- ◇ Per-slot Availability of HEALTHY Signal in Space.
- ◇ Galileo Signal in Space Ranging Accuracy.

3.1 AVAILABILITY OF THE GALILEO SF/DF RANGING SERVICE

The Availability of the Galileo SF/DF Ranging Service is computed at any user location as the percentage of time that the user is provided with at least one HEALTHY⁵ Galileo Open Service (OS) Signal in Space (SiS).

The following figure shows the monthly availabilities of the Galileo Single Frequency (SF) and Dual Frequency (DF) Ranging Services at the Worst User Location (WUL). WUL is selected among the nodes of an equally spaced geographic grid, within the Navigation Service coverage area.

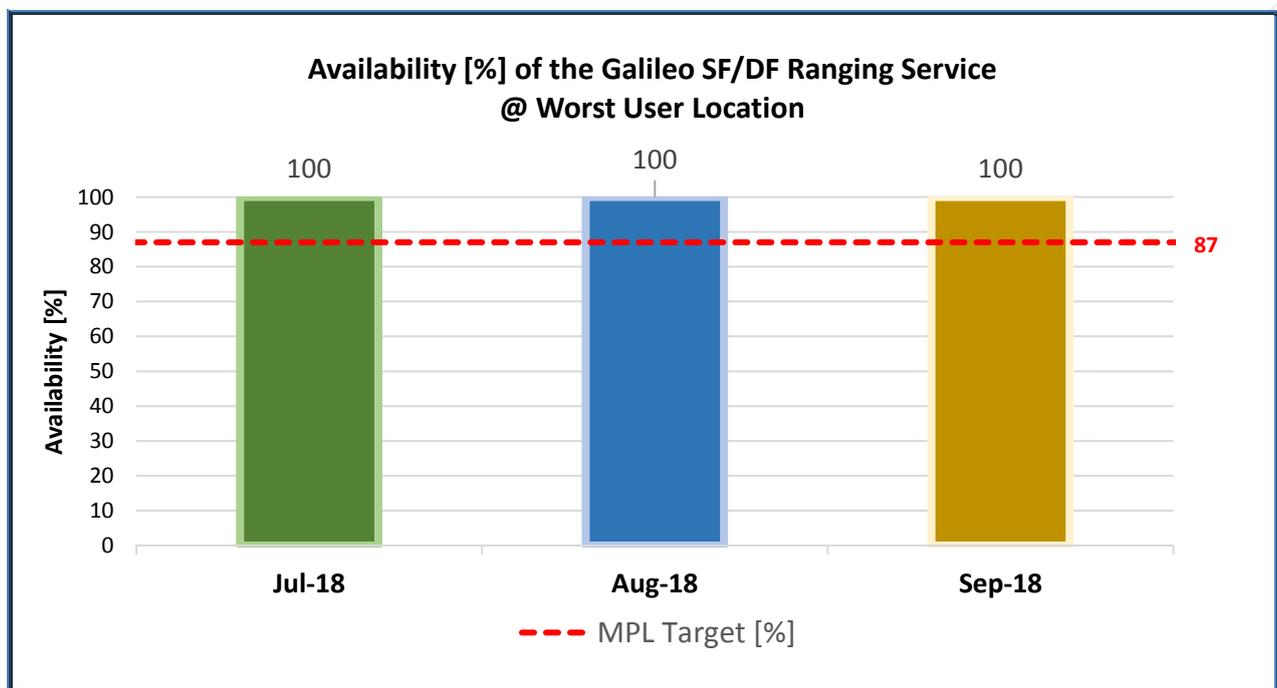


Figure 1: Monthly Availability of the Galileo SF/DF Ranging Service

⁵ HEALTHY Galileo Open Signal in Space is defined in [OS-SDD].

The availability of the Galileo Single Frequency and Dual Frequency Ranging Service is always **100%** over the reporting period. This significantly exceeds the Minimum Performance Level from [OS-SDD], which is specified as **87%** ⁶.

3.2 PER-SLOT AVAILABILITY OF HEALTHY SIGNAL IN SPACE

The “Availability of HEALTHY Signal in Space” is defined, for each Galileo operational satellite, as the percentage of time that the specific satellite broadcasts HEALTHY ⁵ Galileo Open Service Signals in Space.

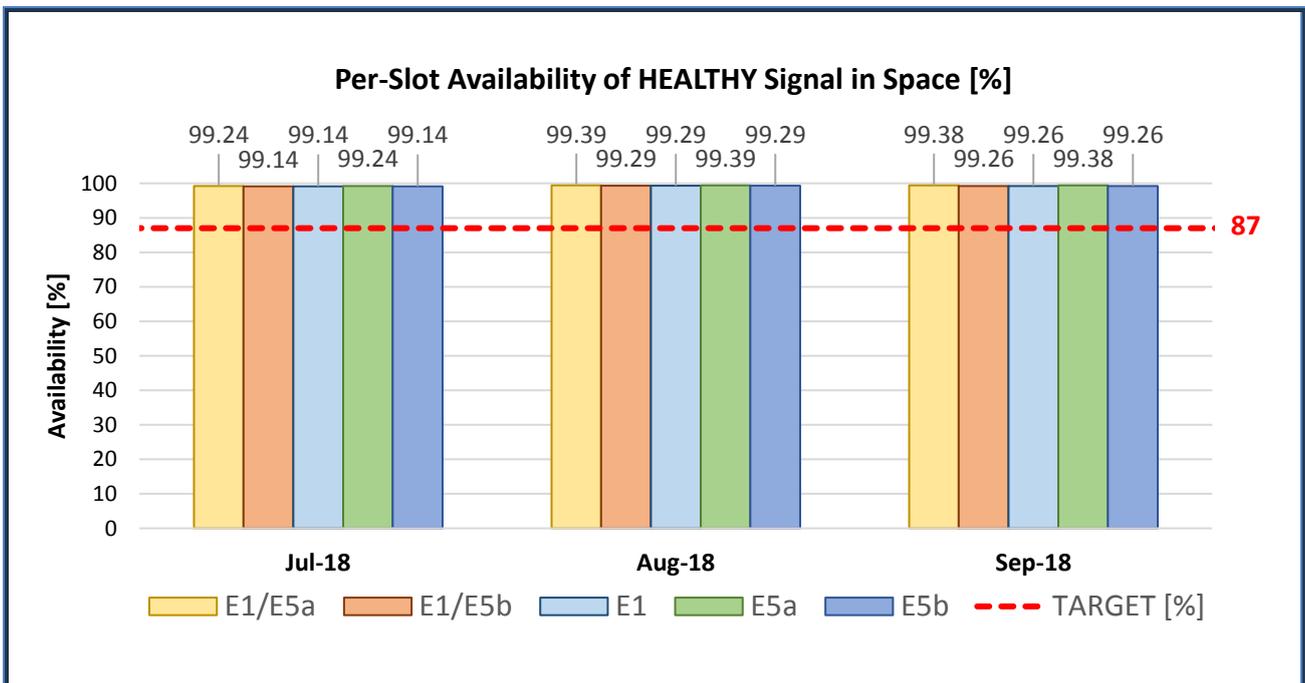


Figure 2: “Per-Slot” availability of HEALTHY Signal in Space for the reporting period

Figure 2 provides the Signal in Space “per slot” availability of Galileo HEALTHY Signals in Space, averaged over the entire constellation during the reporting period and normalised annually.⁷

The [OS-SDD] Minimum Performance Level (MPL) specifies **87%** ⁸ as the target value for this constellation metric.

⁶ Ref.: [OS-SDD] , §3.5.2 (Table 15) and §3.5.3 (Table 16)

⁷ The [OS-SDD] foresees an “annual normalisation”, which is implemented with an incremental averaging process, accumulating data over the previous 12 months. Data for each month takes into account only those space vehicles that are declared active members of the constellation during the whole month.

⁸ Ref.: [OS-SDD] , §3.5.1 (Table 14)

With a moving average implemented starting from 2017, the monthly figures comprised between **99.14%** (I/NAV SIS, July) and **99.39%** (F/NAV SIS, August) are in line with the target annual figure.

In August, the availability of Galileo HEALTHY SIS, evaluated per SIS/satellite/month (without annual normalization), was notably always **100%**.

3.3 GALILEO SIGNAL IN SPACE RANGING ACCURACY

The Galileo Signal In Space Error (SISE) vector provides the instantaneous difference between the Galileo satellite position/clock offset as obtained from the broadcast Navigation message, and the “true” satellite position/clock offset. The true orbit path and clock performance are precisely reconstructed using sophisticated tools. When projecting SISE to the user location, the obtained scalar value is also named Ranging Accuracy and represents the ranging error affecting a user receiver. The following figures show the 95th percentile of the monthly global average of the instantaneous Ranging Accuracy, achieved for each Galileo operational satellite and Single Frequency/Dual Frequency combinations. Projection of SISE is implemented at the nodes of a virtual grid, representing all user locations within the Navigation Service coverage area. Any signals carrying Navigation message information with Age of Time of Ephemeris beyond the validity period of 4 hours are filtered out, as per [OS-SDD] and explained in §5.3.

As shown in the following Figure 3 and Figure 4, the 95% metric applied to the Galileo Signal in Space Ranging Accuracy “for any space vehicle”, over all satellites and frequency combinations, is:

- for individual space vehicles in **July**, between **0.26 [m]** and **0.79 [m]** for Dual Frequency, and between **0.29 [m]** and **0.96 [m]** for Single Frequency;
- for individual space vehicles in **August**, between **0.27 [m]** and **0.43 [m]** for Dual Frequency, and between **0.30 [m]** and **0.63 [m]** for Single Frequency;
- for individual space vehicles in **September**, between **0.34 [m]** and **0.45 [m]** for Dual Frequency, and between **0.37 [m]** and **0.78 [m]** for Single Frequency.

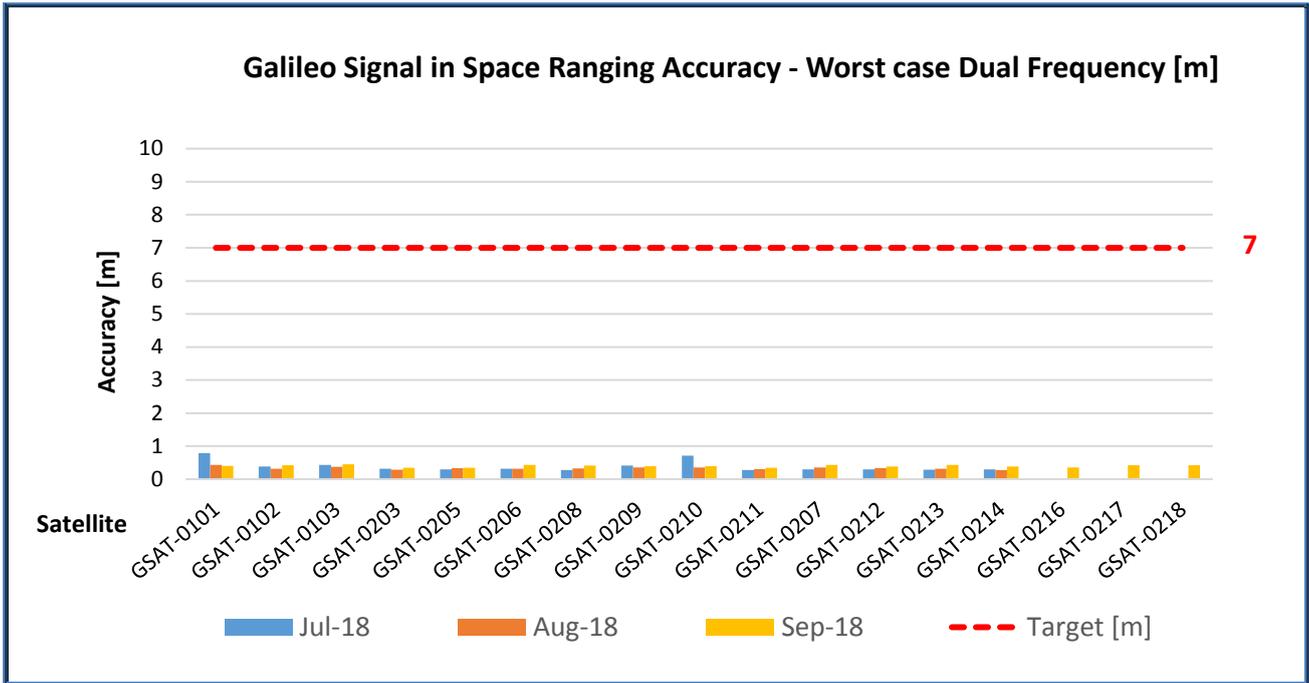


Figure 3: Monthly Galileo SIS Ranging Accuracy (95th percentile) “for any satellite”, measured during reporting period for worst-case, Dual-Frequency (DF)

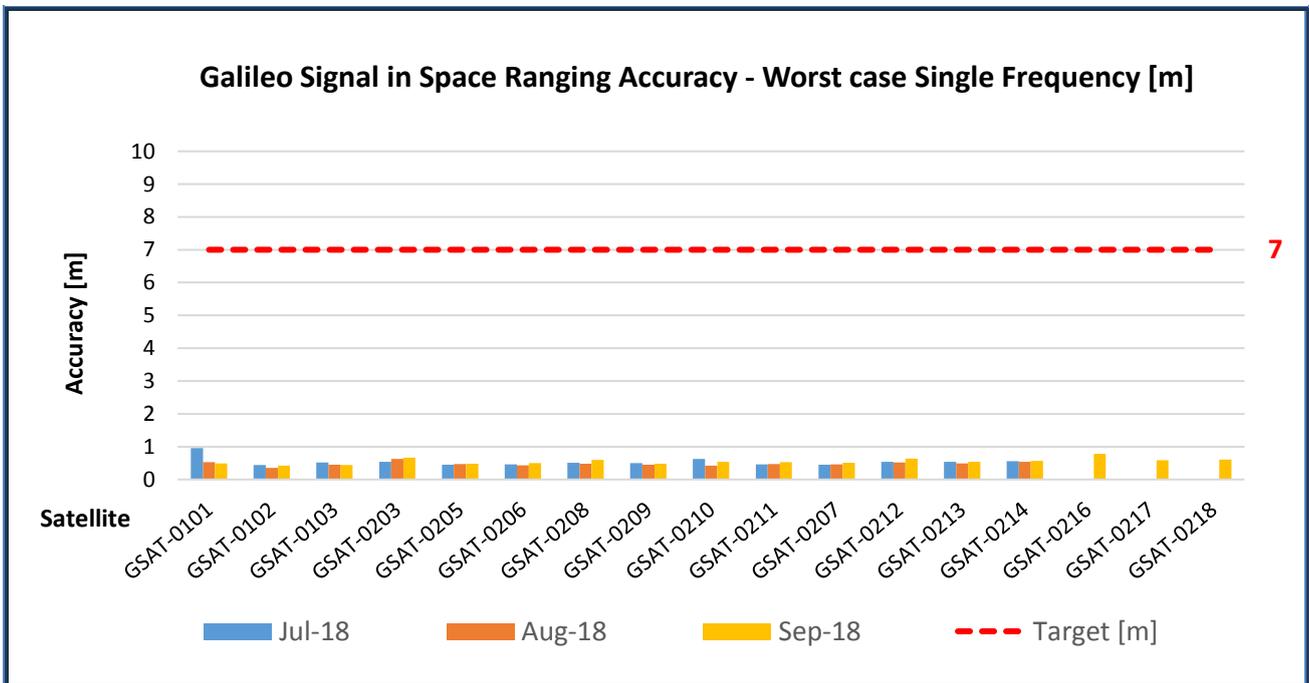


Figure 4: Monthly Galileo SIS Ranging Accuracy (95th percentile) “for any satellite”, measured during the reporting period for worst-case, Single-Frequency (SF)

Compliance with the MPL in [OS-SDD] is always achieved, with a specified maximum threshold of 7 [m]⁹ for the monthly performance of each individual satellite.

Figure 5 depicts the average “over all satellites” (constellation mean). Again, the [OS-SDD] MPL target of 2 [m] is met by the Constellation average value.

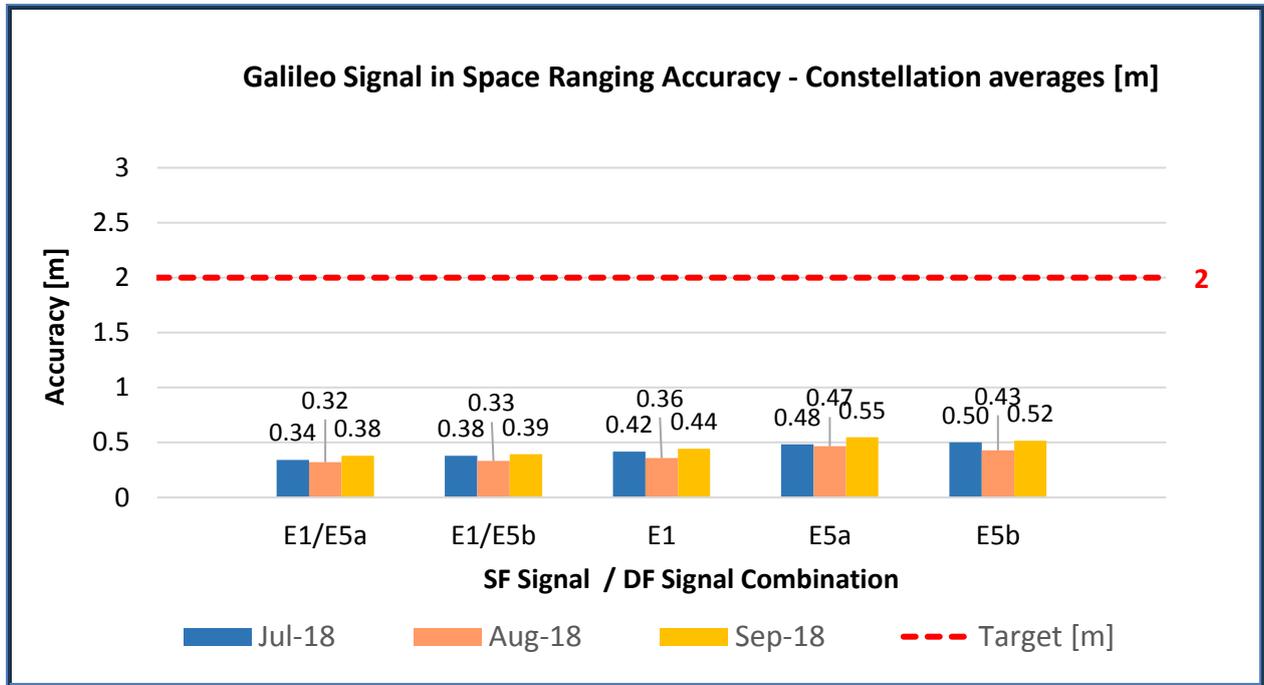


Figure 5: Monthly Galileo SIS Ranging Accuracy (95th percentile) “over all satellites” (constellation average), measured during the reporting period

⁹ Ref.: [OS-SDD], §3.4.1 (Table 9)

4 UTC DISSEMINATION AND GGTO DETERMINATION PERFORMANCE

In this section of the report the following performance figures are provided:

- ◇ Availability of the Galileo Time Correlation Parameters;
- ◇ Accuracy of Galileo Time Correlation Parameters.

4.1 AVAILABILITY OF THE GALILEO TIME CORRELATION PARAMETERS

The *Availability of the Galileo Universal Time Coordinated (UTC) Time Determination Service* is defined as the percentage of time that the system provides at least one HEALTHY⁵ ranging/timing Signal in Space above a minimum elevation angle of 5 degrees. Figure 6 provides the Worst User Location (WUL) Availability of the UTC Determination service, computed for a virtual grid of user positions over the service coverage area.

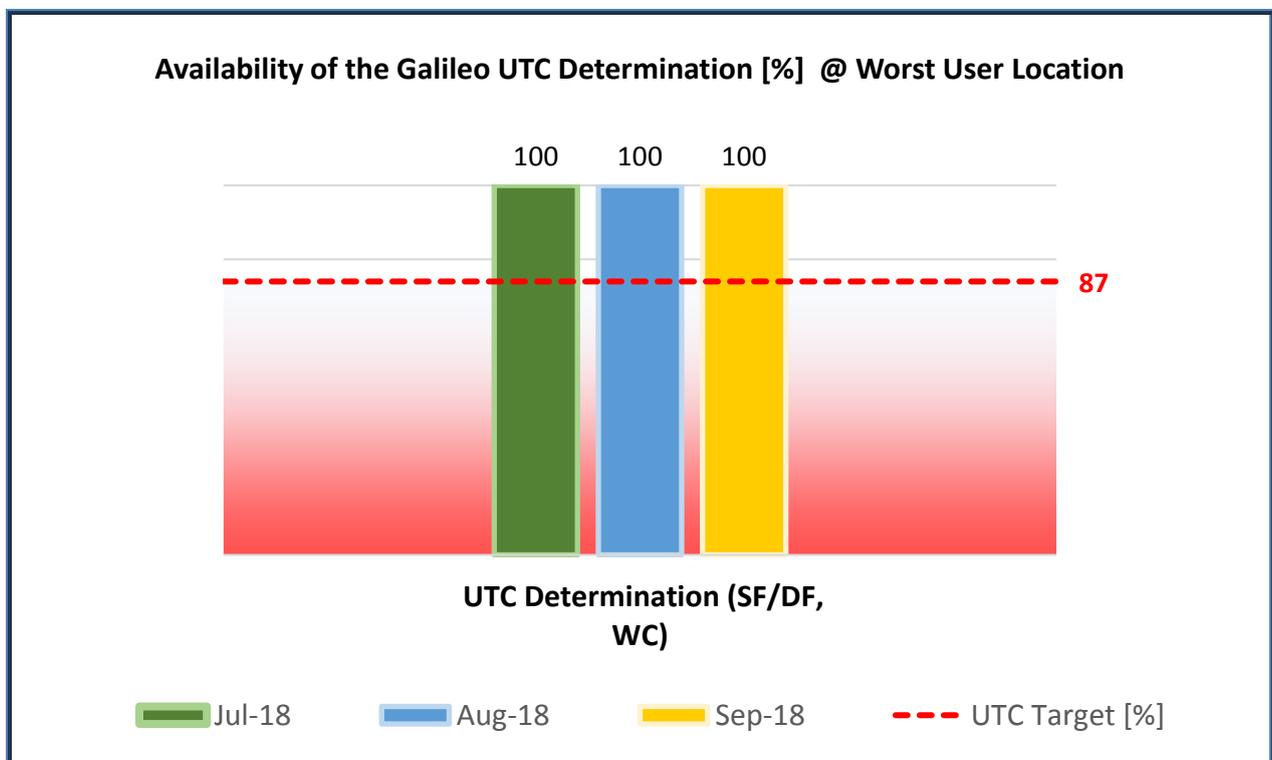


Figure 6: Monthly availability of the UTC Determination Service during the reporting period

As shown in Fig. 6, the monthly (short term) availability of the Galileo UTC Determination Service always reached **100%** during the quarterly period

The MPL of **87%**¹⁰ specified by [OS-SDD] for the long term is therefore fully achieved.

The *Availability of Galileo to GPS Time Offset (GGTO) Determination* is the percentage of time that the system provides at least one non-dummy GGTO¹¹ set of coefficients within the Navigation message, acquiring SiS from a space vehicle seen above a minimum elevation angle of 5 degrees. Figure 7 gives the availability of the GGTO Determination for Worst User Location (WUL), computed for a virtual grid of user positions over the service coverage area. Values are “annually normalised” by accumulating data over the previous 12 months.

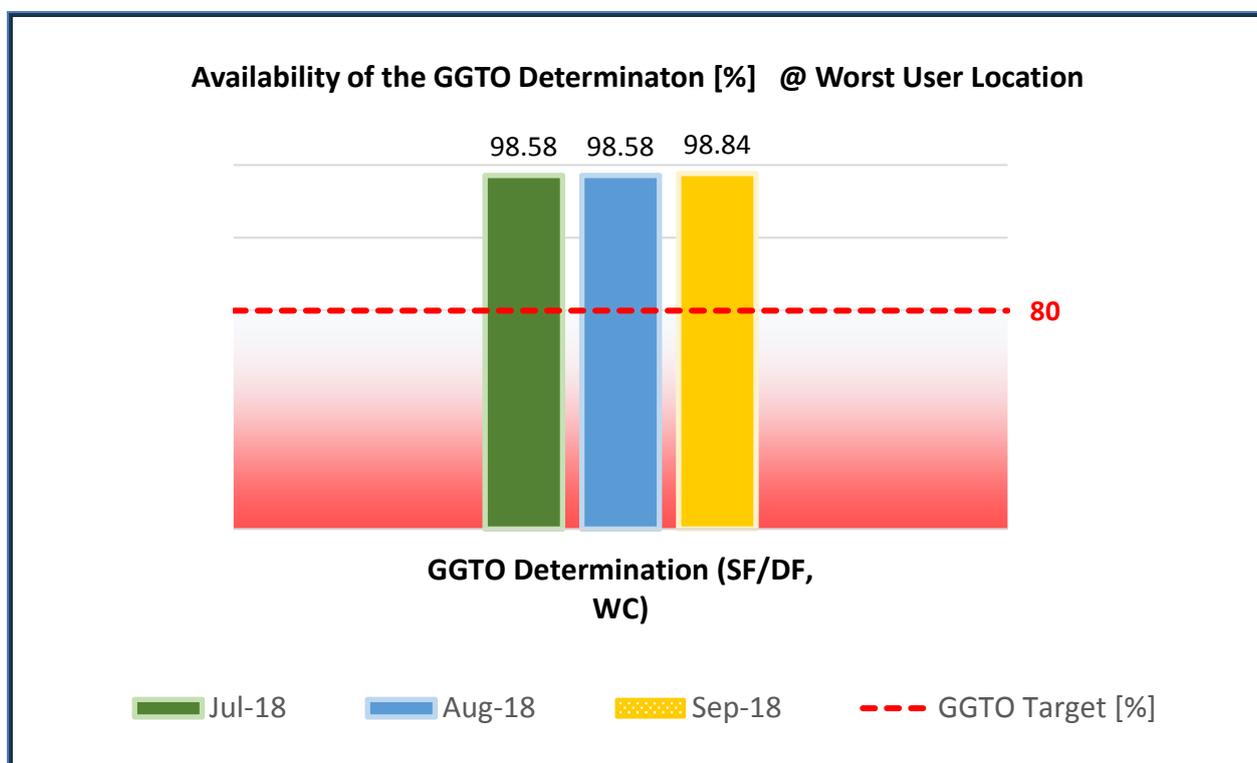


Figure 7: Annually normalised availability of the GGTO Determination, during the reporting period

The monthly (short-term) Galileo user GGTO Determination capability, which is not shown in the figures, was **100%** during the whole reporting period: dummy coefficients were never disseminated.

The MPL of **80%**¹² specified by [OS-SDD] for the long-term is therefore fully achieved.

¹⁰ Ref.: [OS-SDD] , §3.5.4 (Table 17)

¹¹ “Dummy” GGTO is defined in [OS-SDD] and in Galileo SiS ICD in terms of “all 1’s” appearing in the GGTO parameters binary slot(s) carried by the Navigation message.

¹² Ref.: [OS-SDD] , §3.6.1.2 (Table 19)

4.2 ACCURACY OF GALILEO TIME CORRELATION PARAMETERS

The Galileo Signal in Space *Universal Time Coordinated (UTC) Time Dissemination Accuracy* and the Galileo Signal in Space *Universal Time Coordinated (UTC) Frequency Dissemination Accuracy* are computed as the daily average error of the normalized time and frequency offset relative to UTC for a user equipped with a Standard Timing / Calibration Laboratory Receiver. ¹³

The *Galileo to GPS Time Offset (GGTO) Determination Accuracy* is computed as the daily average of the difference between the GST-GPS Time Offset computed using the Galileo navigation message and the true GST-GPS Time Offset.

Figure 8 shows the 95th percentile of the daily average of the UTC Dissemination Accuracy, observed and normalised over a period of 12 months.

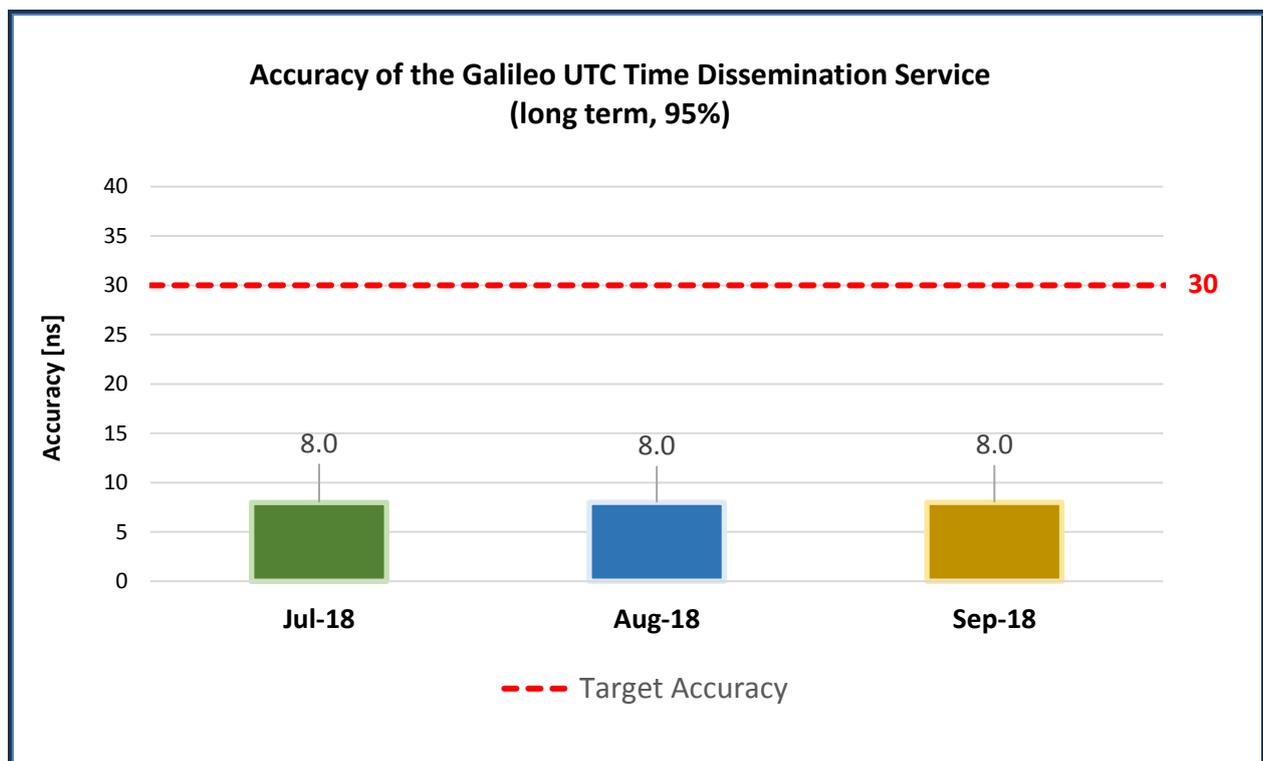


Figure 8: 95th Long-term 95% percentile of UTC Time Dissemination Accuracy

Figure 9 shows the 95th percentile of the daily average of the GGTO Determination Accuracy, normalised annually.

¹³ Note that the final UTC Determination Accuracy experienced by the user will also be affected by ranging errors, on top of the committed UTC Dissemination Accuracy

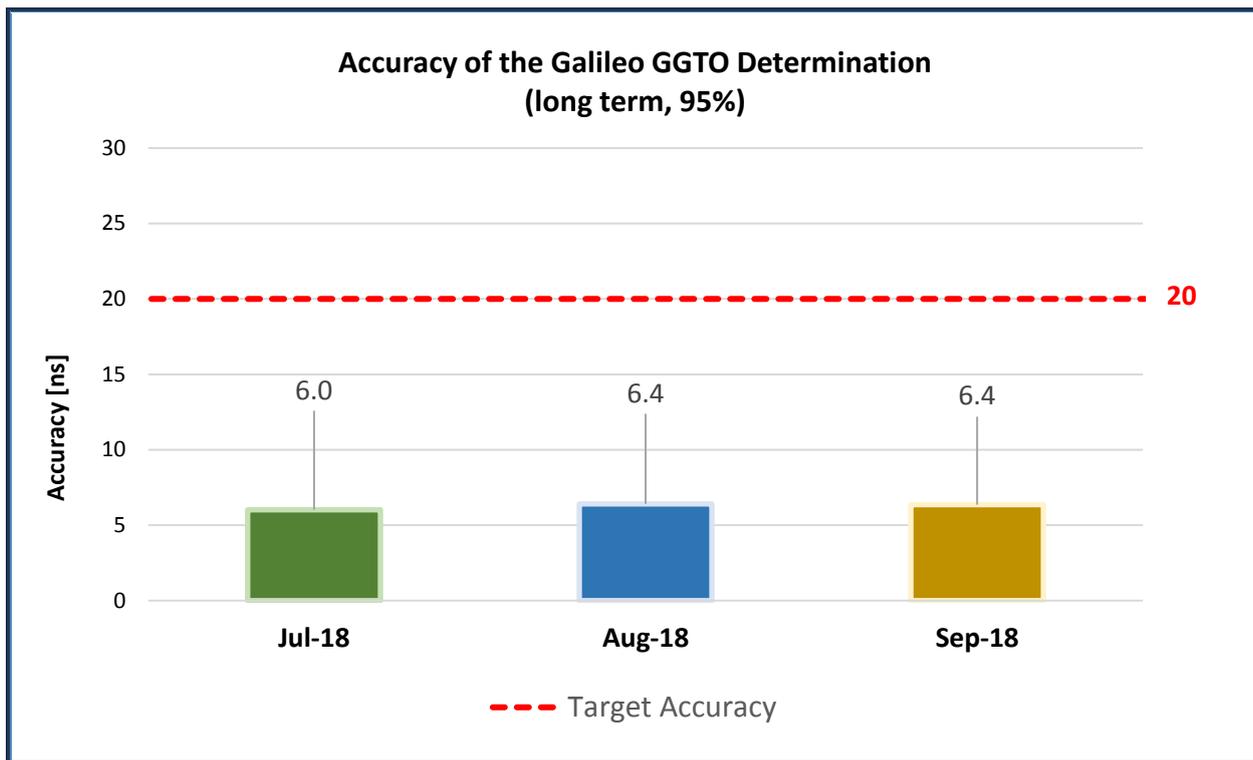


Figure 9: Long-term 95th percentile of GGTO Determination Accuracy

Figure 10 shows the 95th percentile of the UTC Frequency Dissemination Accuracy, computed accumulating measurement data over the past 12 months¹⁴.

As seen in Figure 8 and Figure 9, the long term 95th percentile of UTC (Time) Dissemination Accuracy is constantly around **8 [ns]**. The GGTO Determination Accuracy is less than or equal to **6.4 [ns]**. These figures are both well within the [OS-SDD] Minimum Performance Level specifications of **30 [ns]** and **20 [ns]**, respectively¹⁵.

Regarding UTC Frequency Dissemination accuracy, Figure 10 shows that the measured 95th percentile value is at most around **2E-14**, which is an order of magnitude better than the [OS-SDD] MPL normalised annual ceiling of **3.0E-13**¹⁶.

¹⁴ Long-term figures result from processing measurements accumulated since 2017

¹⁵ Ref.: [OS-SDD] , §3.4.3 (Table 12) and §3.6.1.2 (Table 18)

¹⁶ Ref.: [OS-SDD] , §3.4.4 (Table 13)

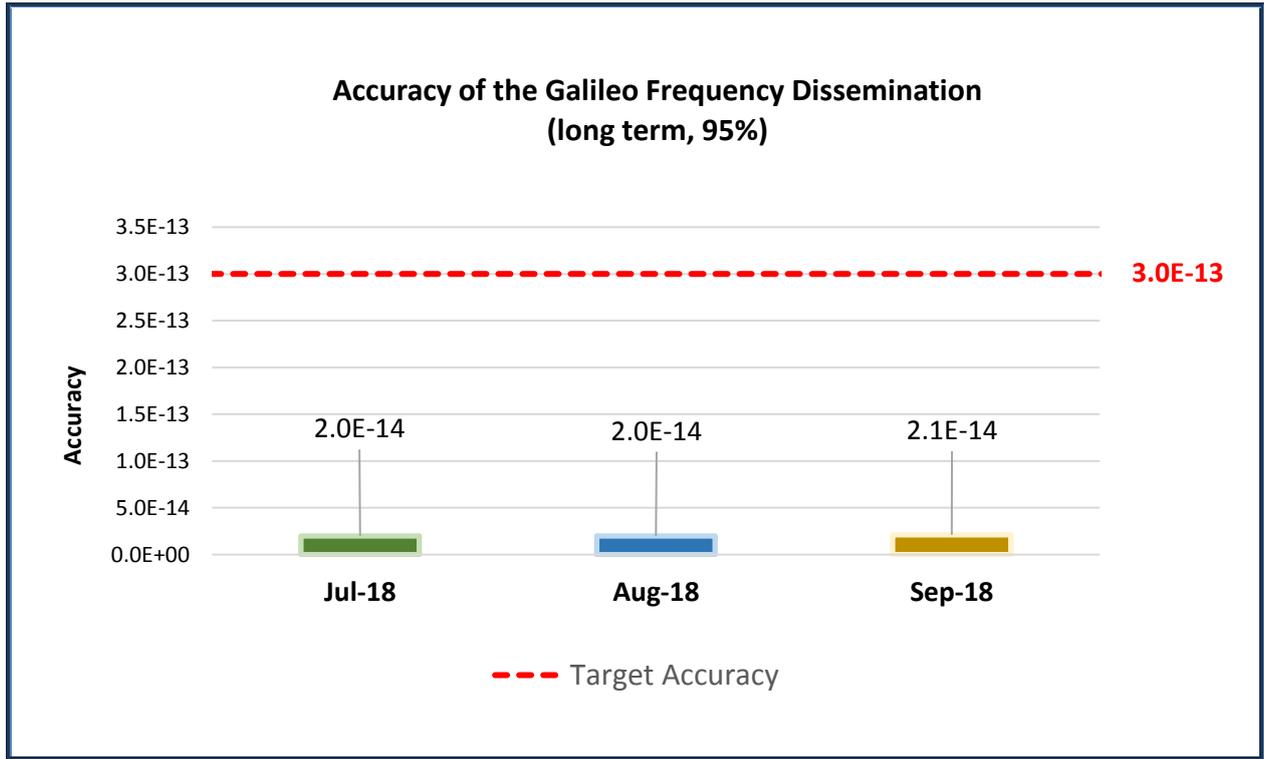


Figure 10: Long-term 95th percentile of UTC Frequency Dissemination Accuracy

5 GALILEO POSITIONING PERFORMANCE

In this section of the report the following performance figures are provided:

- ◇ Availability of Global Horizontal Dilution of precision (HDOP);
- ◇ Availability of Galileo Horizontal Positioning;
- ◇ Galileo measured Positioning Performance.

Note that the current version of the [OS-SDD] does not define specific MPLs for Galileo stand-alone positioning performance. Nevertheless, the target expectation is an availability of at least 50%¹⁷.

5.1 AVAILABILITY OF GLOBAL HORIZONTAL DILUTION OF PRECISION (HDOP)

For 2D positioning¹⁸, the *Availability of Global Horizontal Dilution of precision* (HDOP) is defined as the percentage of time that at least 3 Galileo satellites transmitting HEALTHY Galileo Open Service Signal in Space, above a minimum elevation angle of 5 degrees and satisfying a condition of HDOP less than or equal to 5, are in view from the user locations.

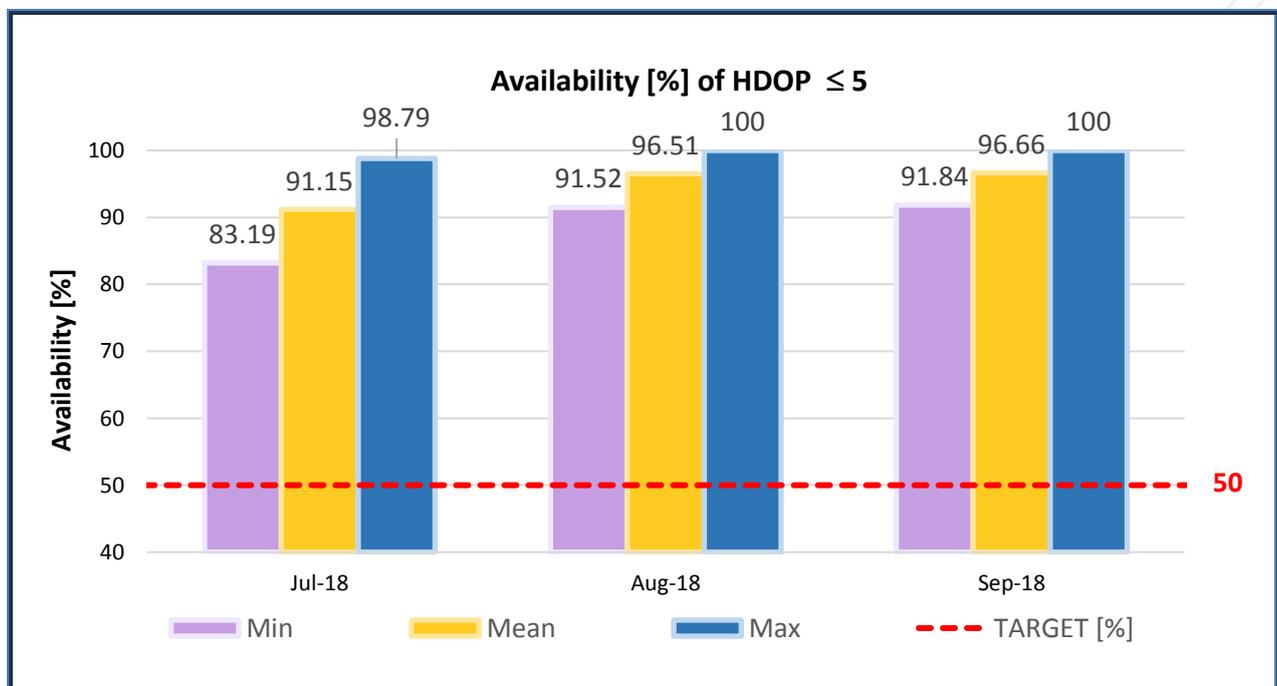


Figure 11: Availability of HDOP ≤ 5

¹⁷ Ref.: [OS-SDD], §C.7.1 (Table 25) and §C.7.2 (Table 26)

Figure 11 above shows the monthly HDOP average availability computed for a grid of user locations within the service coverage area. The probability of achieving a standalone Galileo 2D positioning solution with favourable DOP, thus with good accuracy, was quite high over the whole world during the full quarter.

5.2 AVAILABILITY OF GALILEO HORIZONTAL POSITIONING

The *Availability of Galileo Horizontal Positioning* is defined as the percentage of time with a horizontal positioning error less than or equal to 10 [m], considering only HEALTHY⁵ Galileo Open Signal in Space from satellites above a minimum elevation angle of 5 degrees and assuming a receiver operating in "altitude hold" mode. Horizontal Positioning assumes that Navigation Equations are to be solved in two dimensions¹⁸.

Figure 12 shows the monthly average availability computed for a grid of user locations within the service coverage area, considering only system level contributions to the positioning error.

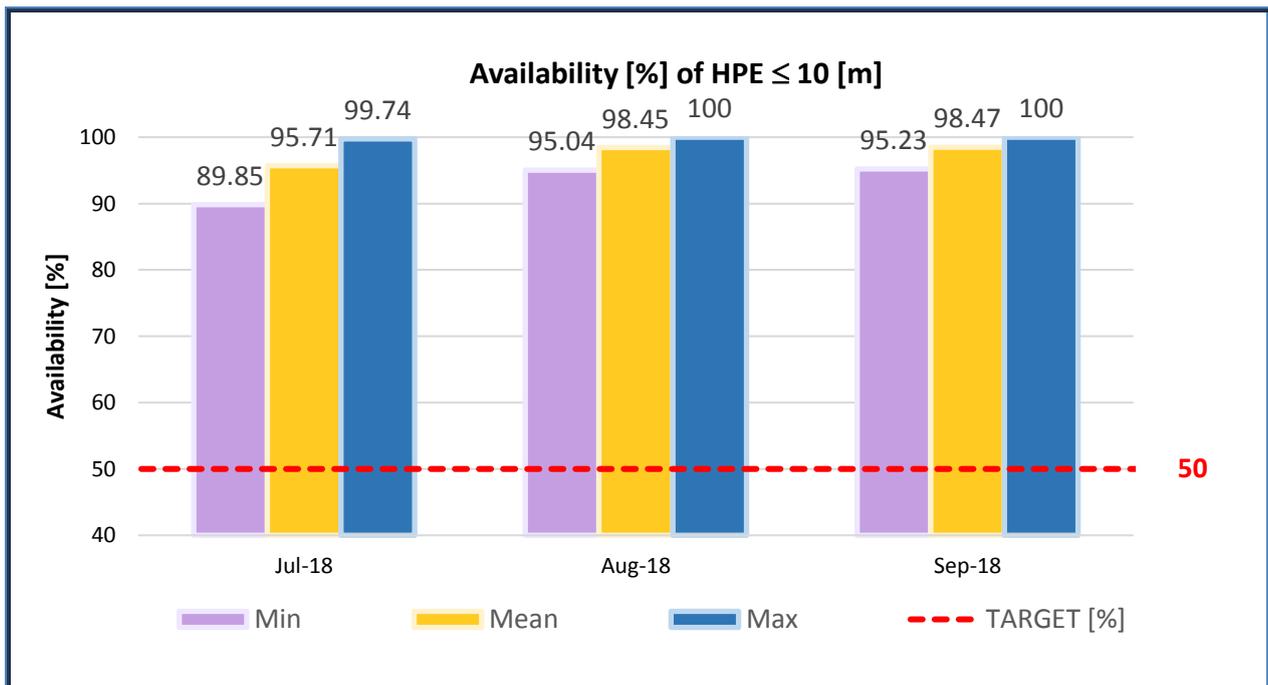


Figure 12: Availability of the Galileo Horizontal Positioning Service with Accuracy ≤ 10 [m]

¹⁸ E.g.: determining only user latitude and longitude, while the altitude over Earth ellipsoid is provided as input known *a priori*

5.3 GALILEO MEASURED POSITIONING PERFORMANCE

Although the Galileo FOC constellation is not yet complete and hence positioning is not yet declared as a Galileo Service, this section provides Navigation Sensor Error estimates as an indication of Galileo Navigation Positioning performance capabilities for a full (3D) solution of Navigation equations.

The following figures show the *Horizontal and Vertical Positioning Accuracy Performance* based on measurements collected over a number of test receivers, solving for user coordinates by following [OS-SDD] recommendations about SIS health status, "Age of toE"¹⁹ and PDOP ≤ 6 .

To this aim it is recalled that, according to the [OS-SDD] directions, Navigation message coefficients with an "Age of toE" beyond 4 hours are no longer valid, so that ranging observables from the corresponding satellite and signal should not be used for positioning and/or time measurement purposes.

The horizontal axis is limited on each plot to a maximum error of 20 metres. Each figure reports also the number of samples exceeding a horizontal or vertical error larger than 20 [m].

¹⁹ Parameter "toE" (Time of Ephemeris) is disseminated in the Navigation message, as part of the Ephemeris Set. See [SIS-ICD], section 5.1.1

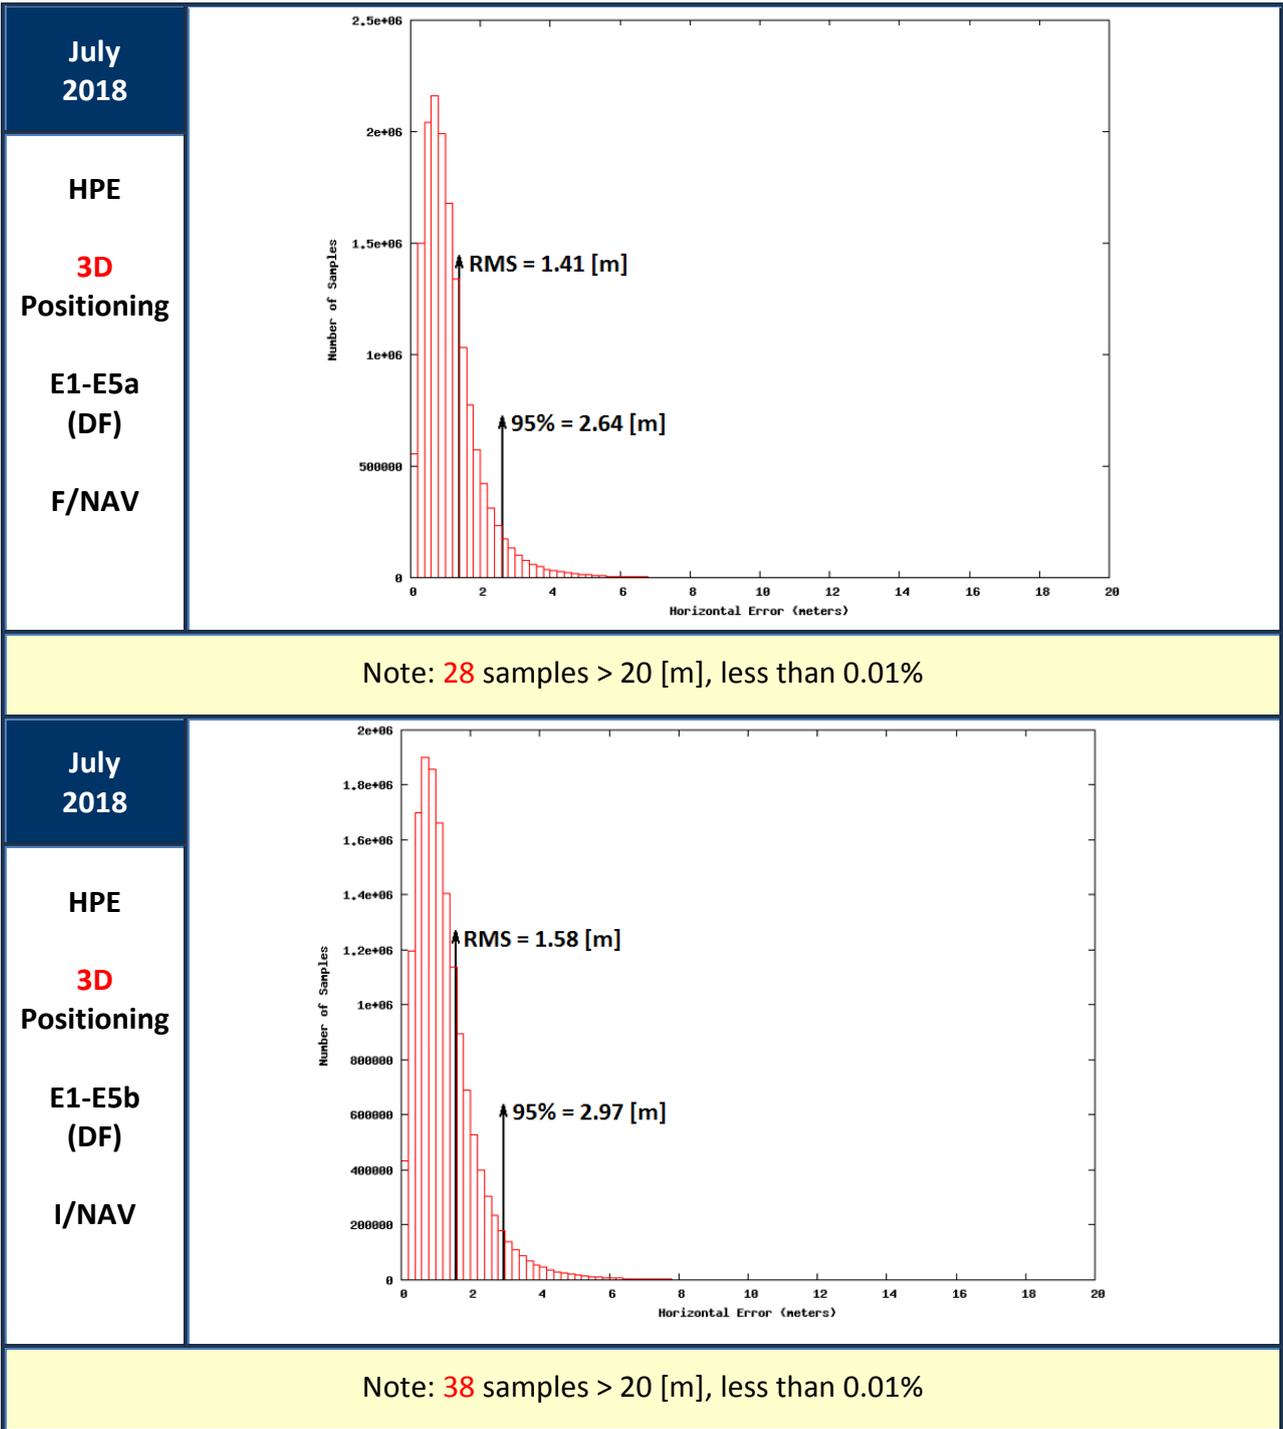


Figure 13: Horizontal Positioning Error (HPE) for “Galileo-only” users in July 2018

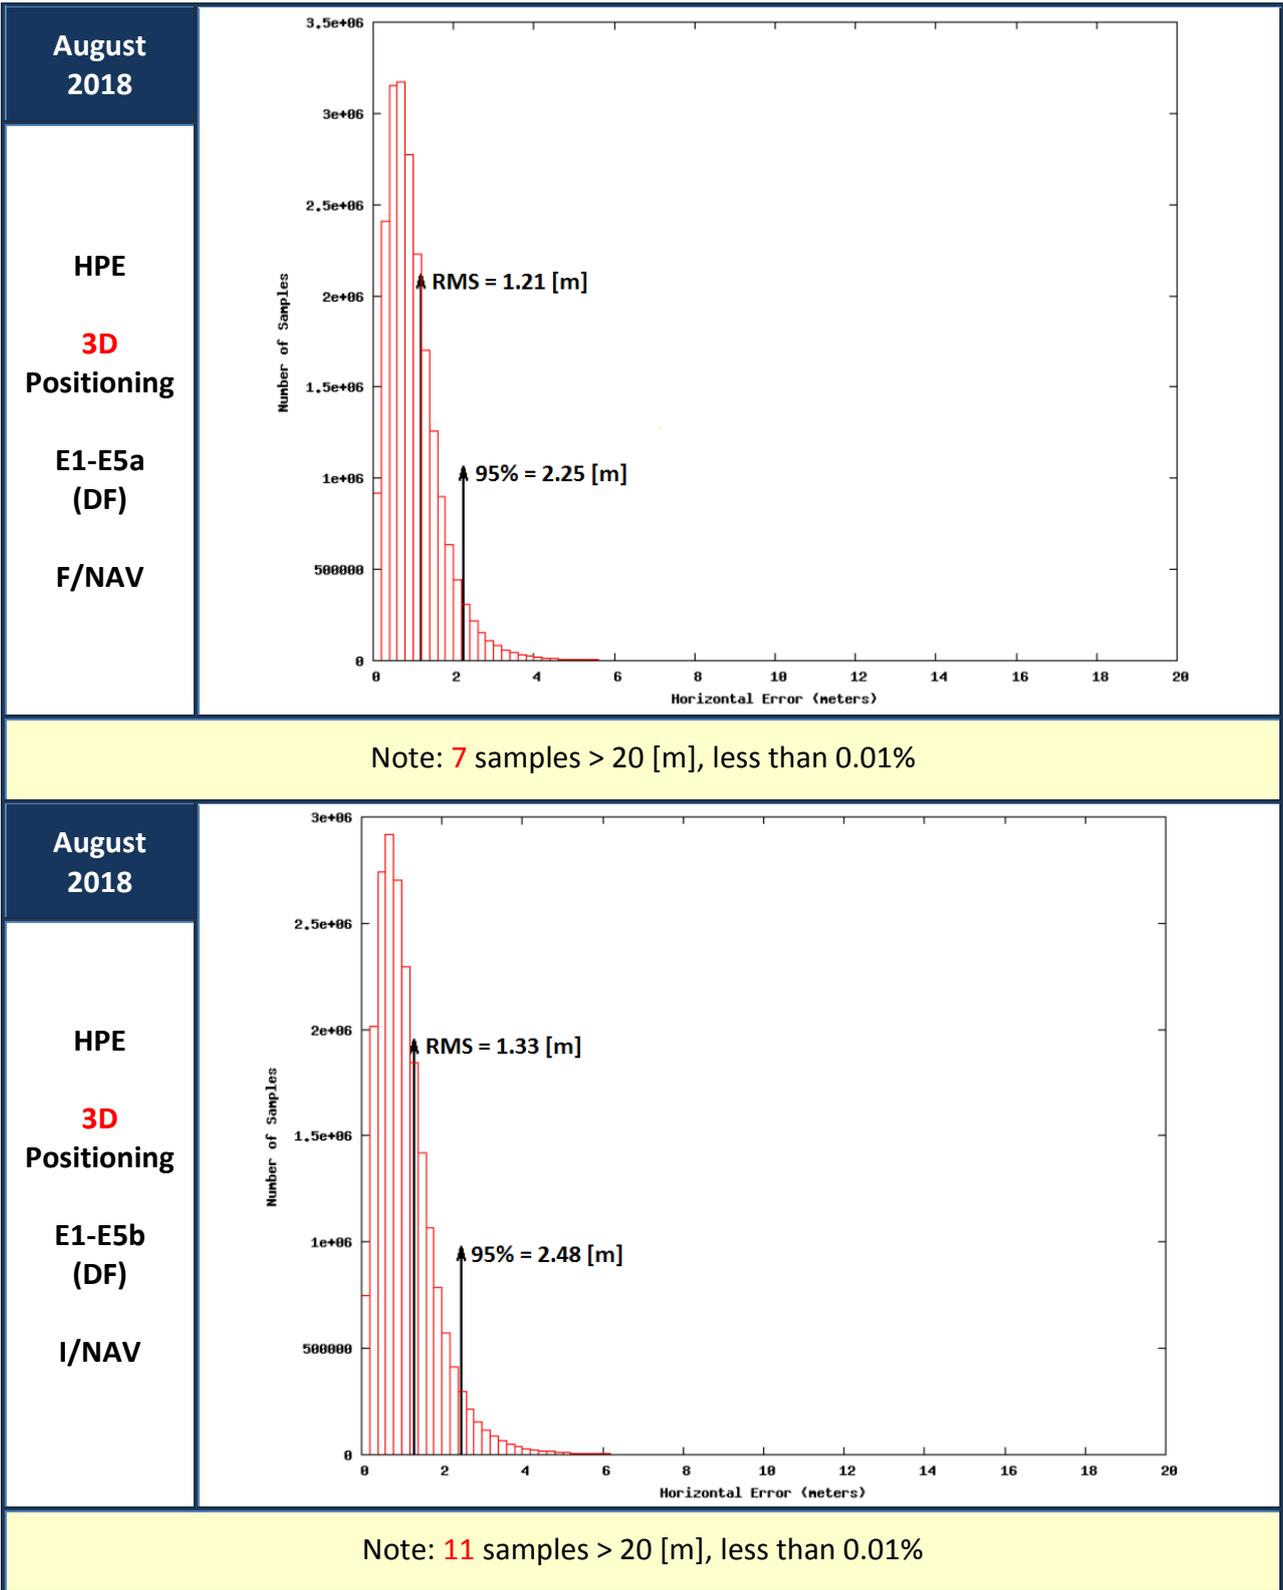


Figure 14: Horizontal Positioning Error (HPE) for “Galileo-only” users in August 2018

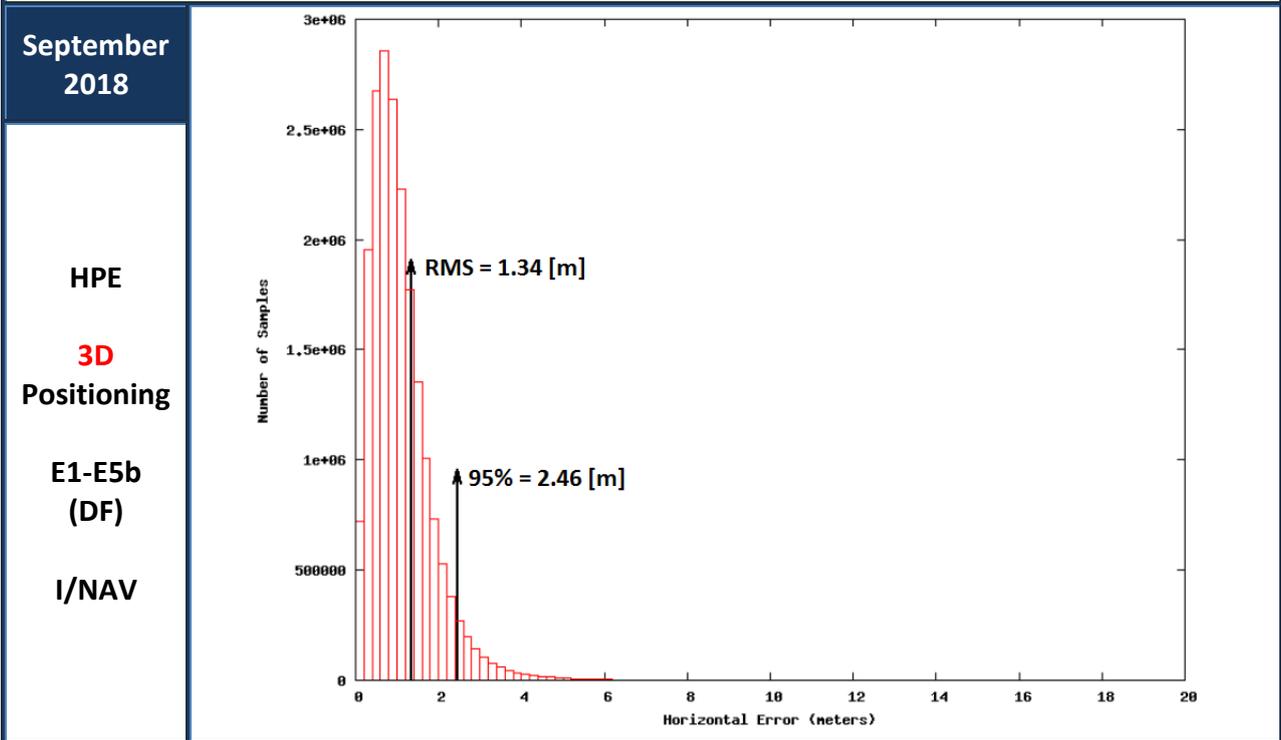
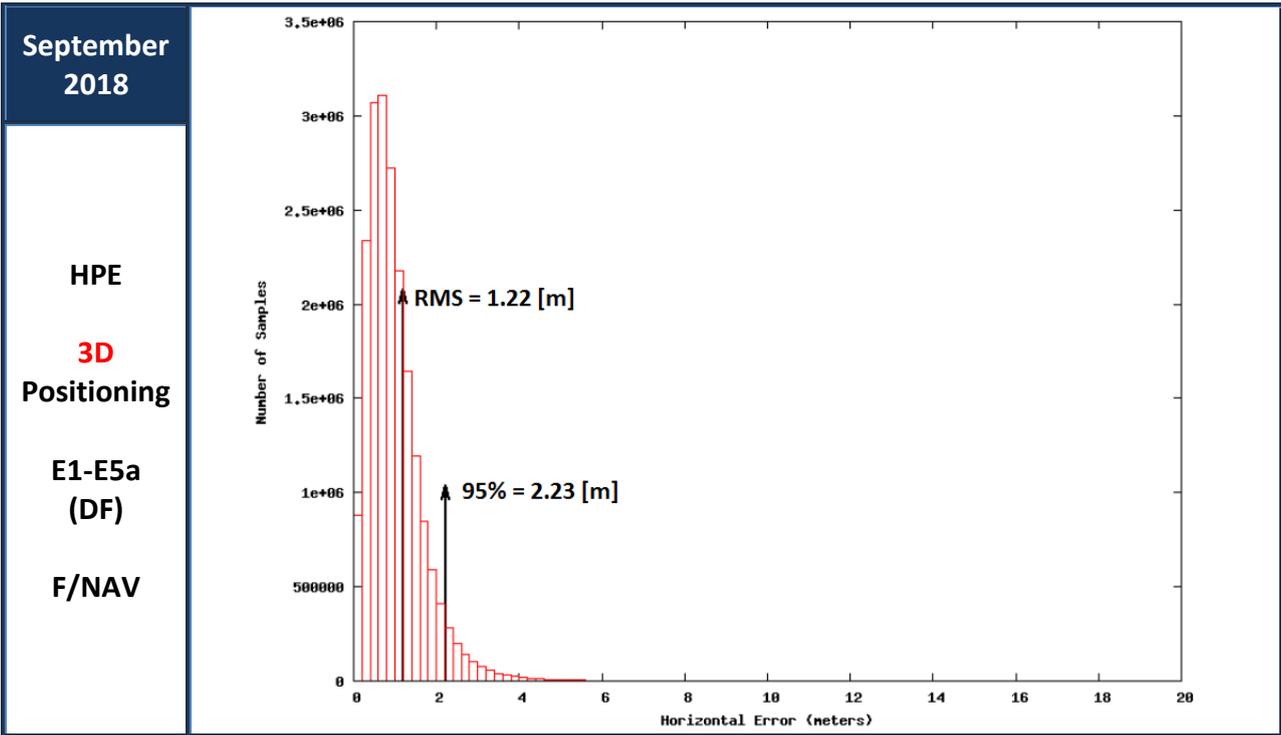


Figure 15: Horizontal Positioning Error (HPE) for “Galileo-only” users in September 2018

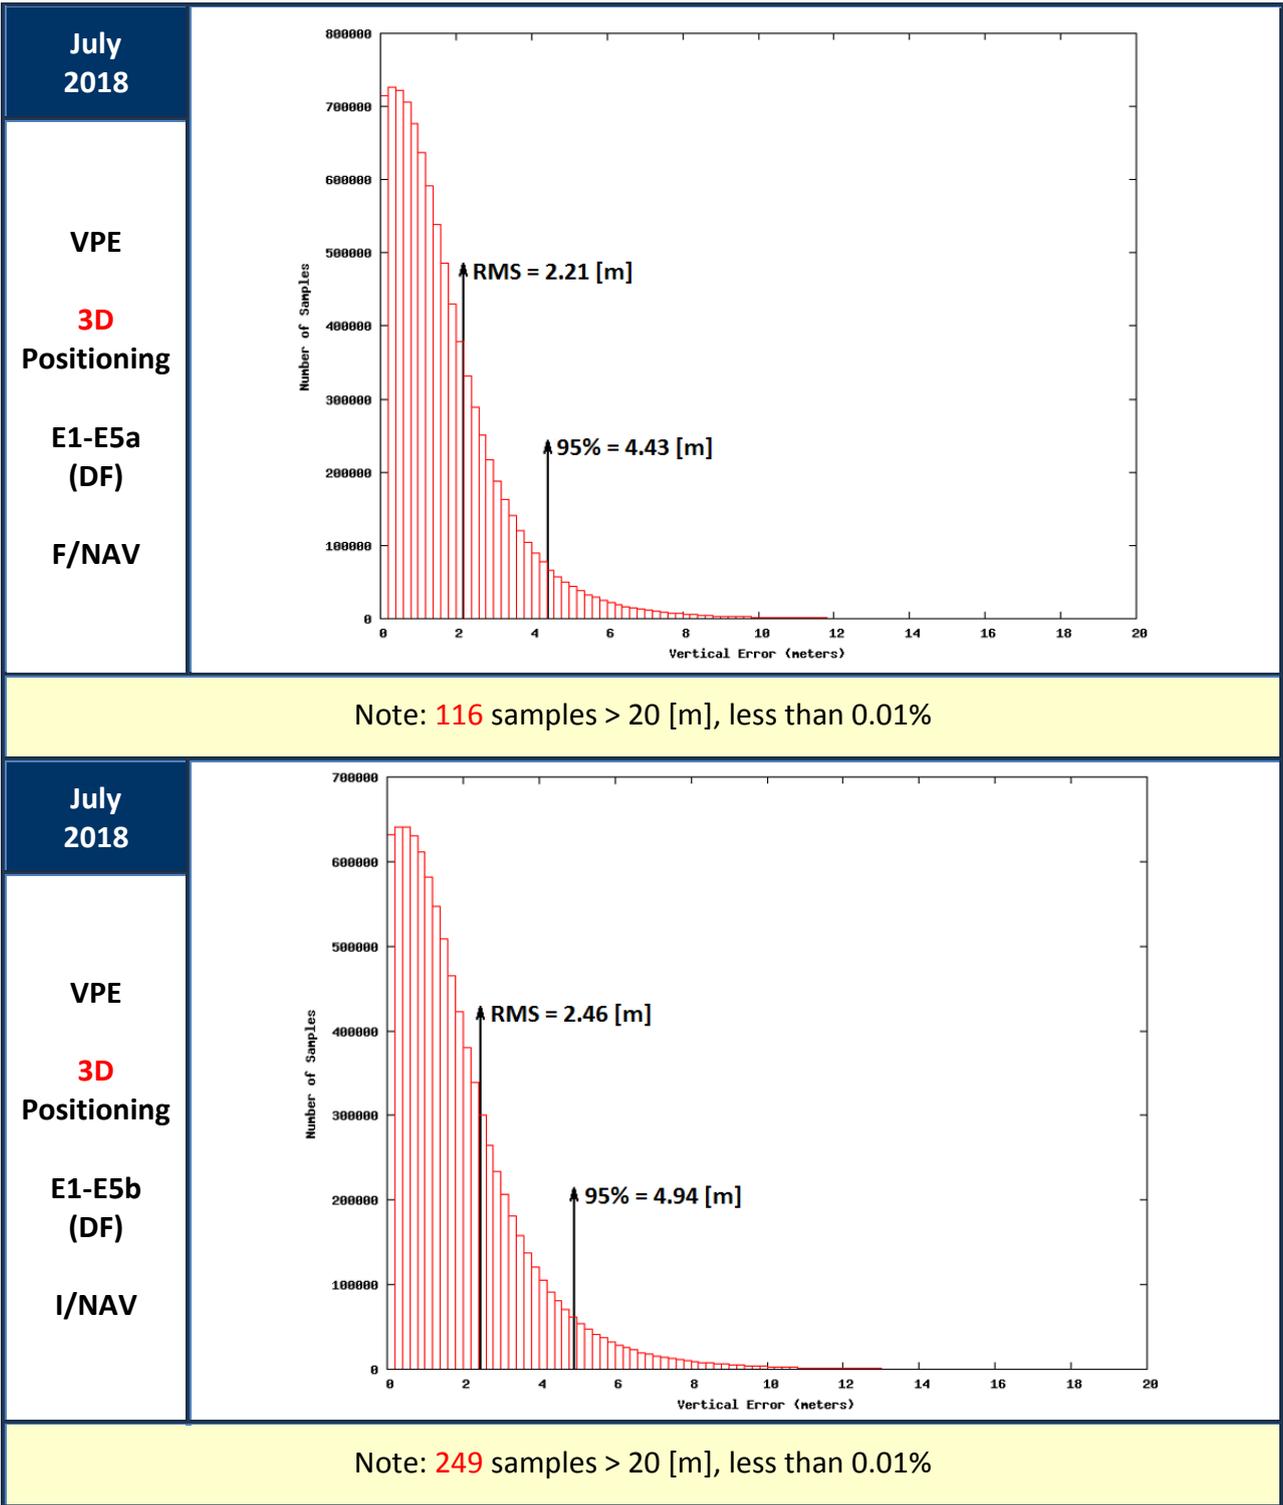


Figure 16: Vertical Positioning Error (VPE) for Galileo only users in July 2018

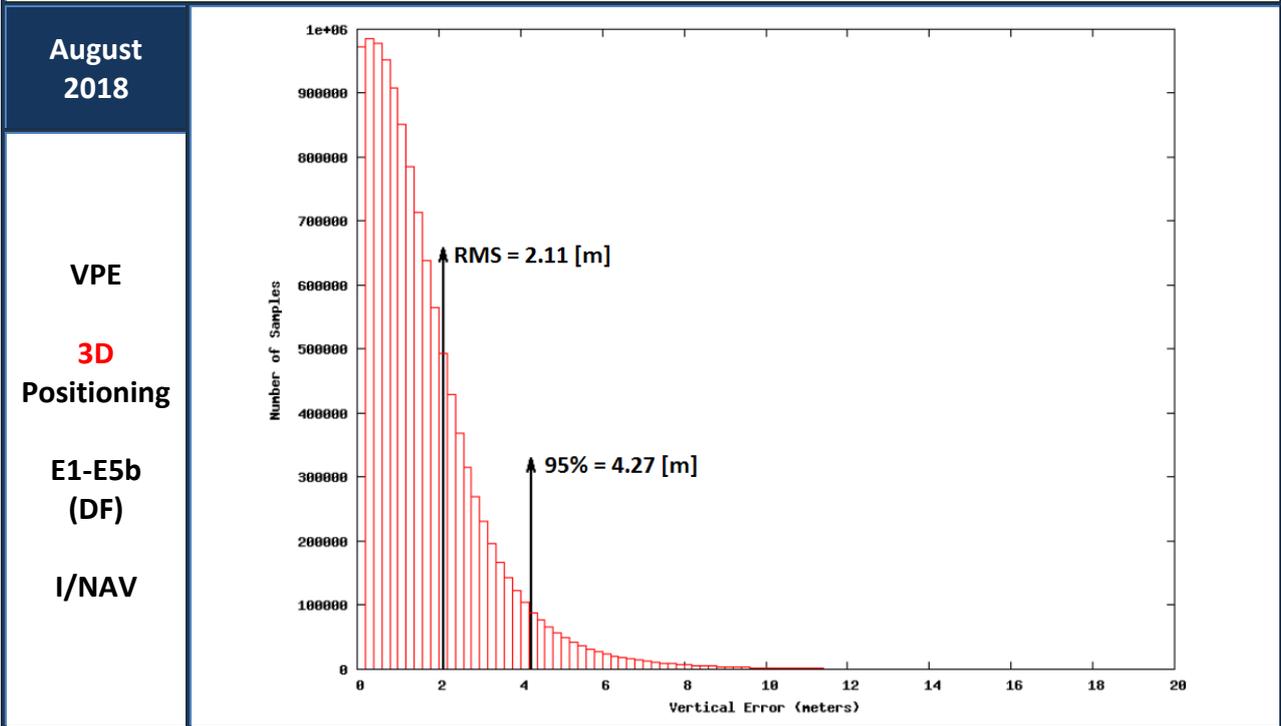
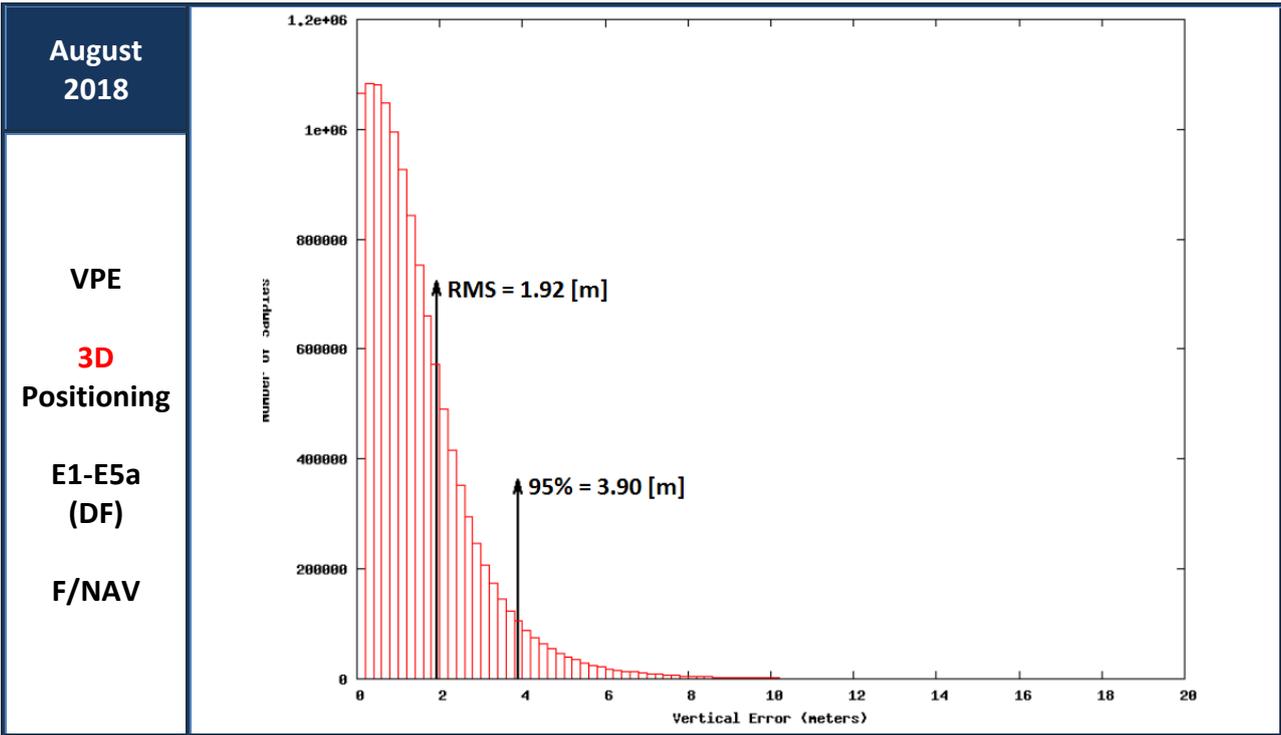


Figure 17: Vertical Positioning Error (VPE) for Galileo only users in August 2018

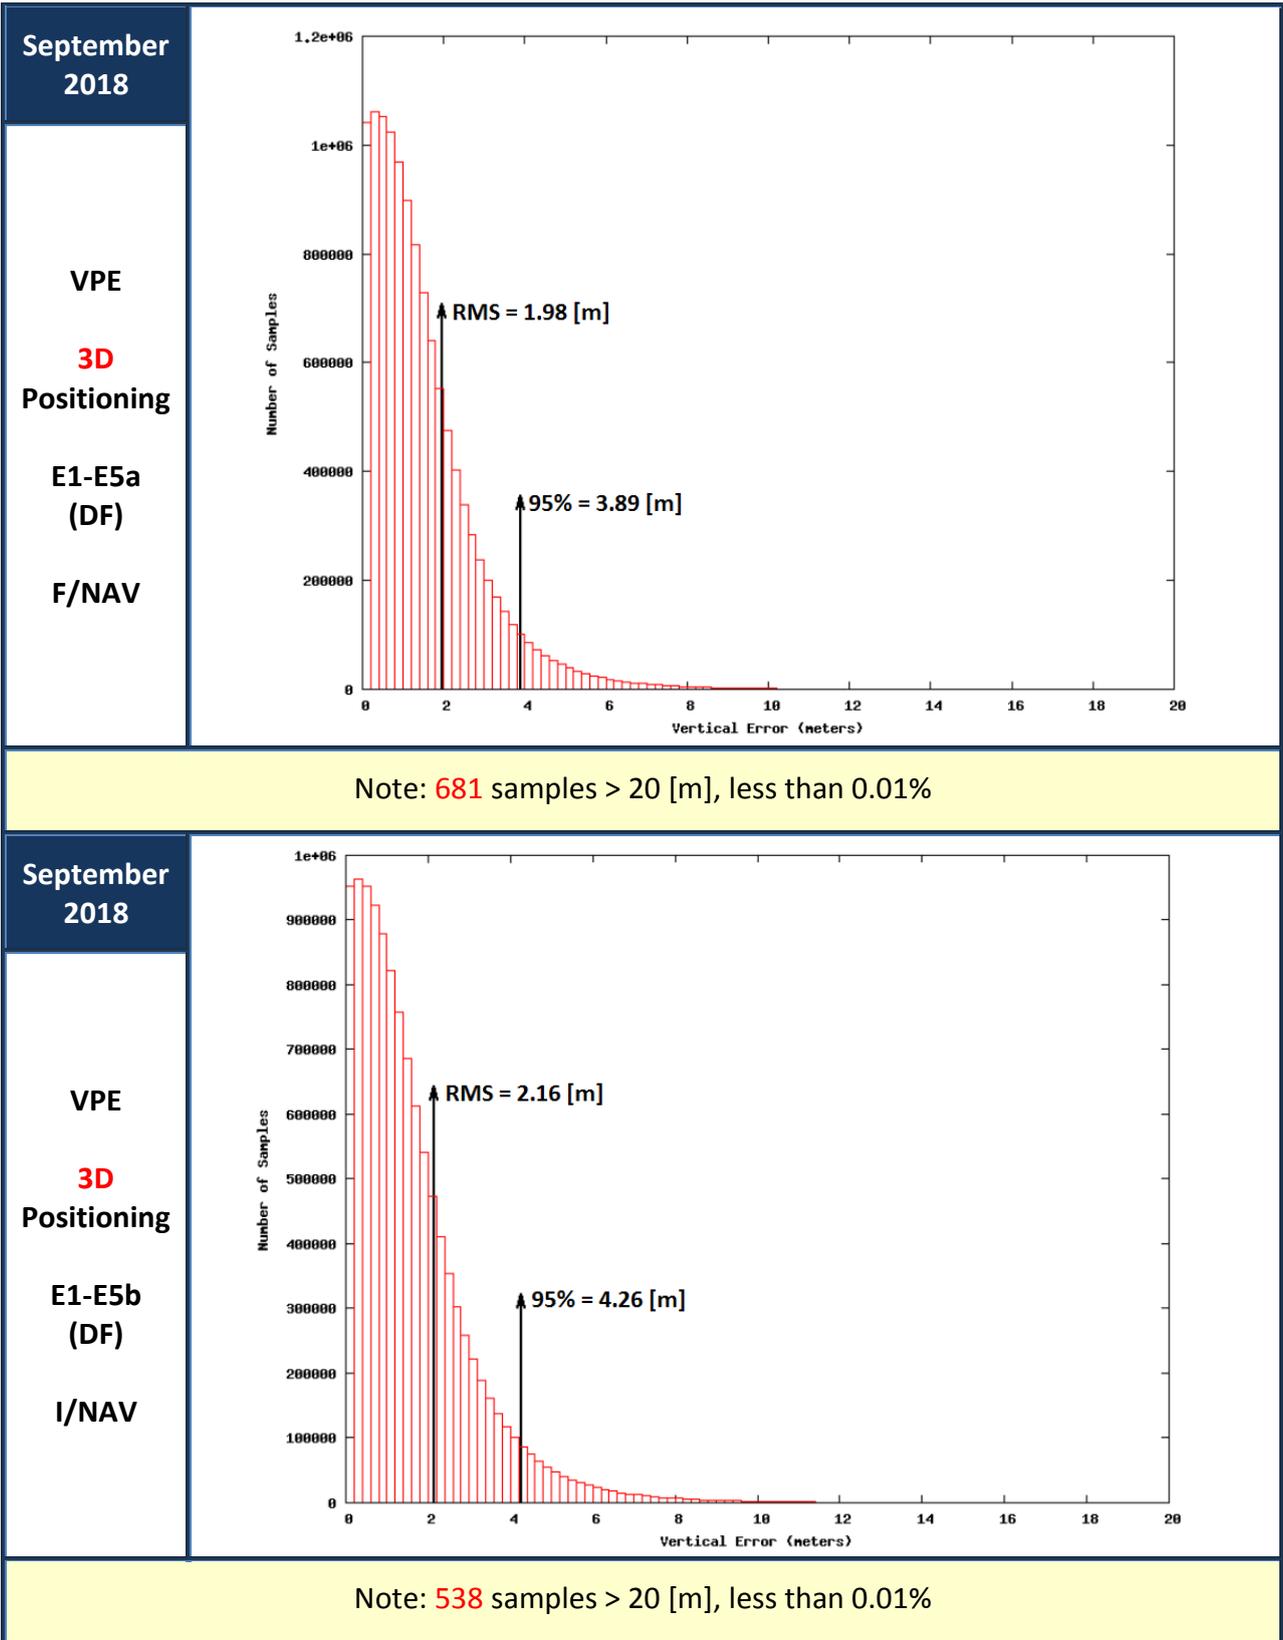


Figure 18: Vertical Positioning Error (VPE) for Galileo only users in September 2018

6 TIMELY PUBLICATION OF NOTICE ADVISORY TO GALILEO USERS (NAGUS)

The European GNSS Service Centre (GSC) is responsible for timely publication of Notice Advisory to Galileo Users (NAGU) messages on its web pages:

GNSS Service Centre NAGU Publication Service Web Pages	
NAGUs	https://www.gsc-europa.eu/system-status/user-notifications (Active user Notifications)
Information	https://www.gsc-europa.eu/system-status/user-notifications-archive (Archived user Notifications)

Table 5: GSC web pages for Galileo User Notifications (NAGUs)

During the reporting period, the **target MPLs for publishing NAGUs have been met in all cases.**

According to MPLs in the [OS-SDD], NAGUs related to Planned events need to be published at least **24** hours²⁰ before the event starts. For Unplanned events, the [OS-SDD] specifies a delay of up to **72** hours²⁰ from the detection of the unplanned event until a corresponding NAGU is issued.

No NAGUs issued in the period refer to unplanned events affecting the Space Segment.

The summary of NAGUs that have been published during the reporting period is as follows:

²⁰ Ref.: [OS-SDD], §3.7.1 (Table 20)

Month	NAGU Type	Reason for publishing	Notice Advisory ID	Categorisation
July	PLN_OUTAGE	Announcement of planned outage for maintenance operation on GSAT-0103 (E19)	2018013	P
	PLN_EXTNS	Fist extension of the NAGU concerned with maintenance of GSAT-0103	2018014	U
	PLN_EXTNS	Second extension of the NAGU concerned with maintenance of GSAT-0103	2018015	U
	USABLE	Stating recovered normal service after planned maintenance of GSAT-0103	2018016	U
	GENERAL	Announces successful launch of Space Vehicles GSAT-0219 (E36), GSAT-0220 (E13), GSAT-0221 (E15) and GSAT-0222 (E33), occurred on 25/07/2018	2018017	U
August	USABINIT	Declares usability of GSAT-0218 (E31) for the active provision of Navigation and SAR services	2018018	U
	USABINIT	Declares usability of GSAT-0216 (E25) for the active provision of Navigation and SAR services	2018019	U
	USABINIT	Declares usability of GSAT-0217 (E27) for the active provision of Navigation and SAR services	2018020	U
September	PLN_OUTAGE	Announcement of planned outage for maintenance operation on GSAT-0101 (E11)	2018021	P

NAGU Categorization for timeliness evaluation: "P" = as for Planned, "U" = as for Unplanned

Table 6: NAGUs published during Quarter

7 REFERENCES

This section identifies the documents explicitly referenced in this Galileo Initial Open Service Public Performance Report.


- [SIS-ICD] European GNSS (Galileo) Open Service Signal-In-Space Interface Control Document (OS-SIS-ICD), Issue 1.3, European Union, December 2016
- [IONO] Ionospheric Correction Algorithm for Galileo Single Frequency Users, Issue 1.2, European Union, September 2016
- [OS-SDD] European GNSS (Galileo) Open Service Definition Document (OS-SDD), Issue 1.0, European Union, December 2016.

Previous documents are made available to users through the web portal of the European GNSS Service Centre (<http://www.gsc-europa.eu/>).

For an exhaustive description of the Minimum Performance Levels (MPLs), the reader is referred to the [OS-SDD]. Individual sections of the [OS-SDD] have been referenced throughout this report when referring to MPL target values.

8 LIST OF ACRONYMS

Acronym	Definition
DF	(Galileo OS) Dual Frequency combination (E1/E5a, E1/E5b)
DOP	Dilution of Precision
ECEF	Earth Centred, Earth Fixed frame coordinates
F/NAV	Navigation message provided by the E5a signal [SIS-ICD]
FOC	Full Operational Capability
GSA	European Global Navigation Satellite Systems Agency
GGTO	GST-GPS Time Offset
GMS	Galileo Mission Segment
GPS	Global Positioning System
G/S	Ground Segment
GSC	European GNSS Service Centre
GST	Galileo System Time
HDOP	Horizontal Dilution of Precision
HPE	Horizontal Positioning Error
ICD	Interface Control Document
I/NAV	Navigation message provided by the E1-B and E5b signals [SIS-ICD]
IS	(Galileo) Initial Services
MPL	Minimum Performance Level
NAGU	Notice Advisory to Galileo Users
OS	(Galileo Navigation) Open Service
PDOP	Position Dilution of Precision
SDD	Service Definition Document
SF	(Galileo OS) Single Frequency (E1, E5a, E5b)
SIS	Signal in Space
SISE	Signal In Space Error vector (4-dimensional)
toE	Time of Ephemeris
UTC	Universal Time Coordinated
VPE	Vertical Positioning Error
WUL	Worst User Location

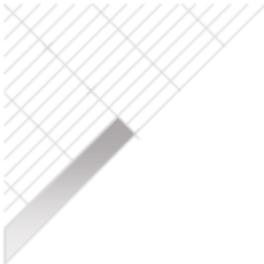

End of Document

