



NAVIGATION
SOLUTIONS
POWERED
BY EUROPE

EUROPEAN GNSS (GALILEO) SERVICES

OPEN SERVICE

QUARTERLY PERFORMANCE REPORT

JANUARY - MARCH 2021

Copyright © European Union, 2021

This document and the information contained in it is subject to applicable copyright and other intellectual property rights under the laws of the Belgium and other states. This document and information contained in this document may be excerpted, copied, printed, republished, made available to the public by wire or wireless means and/or otherwise provided to third parties only under the condition that the source and copyright owner is clearly stated as follows: “Source: Galileo Services - Open Service Performance Report January - March 2021 © European Union, 2021”. If you do republish we would be grateful if you link back to the GSA website www.gsa.europa.eu. No part of this document, including any part of the information contained therein, in whichever format, whether digital or otherwise, may be altered, edited or changed without prior express and written permission of the European Union, to be requested via the European GNSS Agency, to be requested via <https://www.gsa.europa.eu/contact-us>, clearly stating the element (document and/or information) and term of use requested. For reproduction or use of photos and any other artistic material, permission may have to be sought directly from the copyright holder.

The designations employed, the representation of the materials and the views expressed by authors, editors, or expert groups, other EU agencies and/or their staff members or other third parties, do not necessarily represent the opinions or the stated policy of either GSA or the European Union. The mention of specific companies or of certain manufacturers’ products does not imply that they are endorsed or recommended by the GSA or the European Union in preference to others of a similar nature that are not mentioned. Errors and omissions excepted, the names of proprietary products and copyright holders are distinguished by initial capital letters.

Without prejudice to the terms and conditions of the Galileo Open Service available here https://www.gsa.europa.eu/system/files/galileo_documents/Galileo-OS-SDD.pdf, the content of this report provides the characterisation of the Galileo Open Service performance during the reported period using the various means and tools available at the European GNSS Agency, and is deemed correct. Notwithstanding, the European GNSS Agency and the European Union do not assume any responsibility or liability derived from the accuracy of the data contained therein to the extent permitted by the applicable law.

Should you become aware of any breach of the above terms of use, please notify the European GNSS Agency immediately, through the above-mentioned contact site. Any breach of these terms of use may be subject to legal proceedings, seeking monetary damages and/or an injunction to stop the unlawful use of the document and/or any information contained therein.

The above terms of use shall be governed by the EU law and the national substantive law of Belgium. The courts of Brussels shall have jurisdiction to give judgement for any claims arising out of these terms of use.

By downloading, forwarding, and/or copying this document or any parts thereof, in whichever format, whether digital or otherwise, the user acknowledges and accepts the above terms of use as applicable to him/her.



TABLE OF CONTENTS

1	INTRODUCTION.....	1
2	EXECUTIVE SUMMARY	4
3	OPEN SERVICE RANGING PERFORMANCE.....	8
3.1	PER-SLOT AVAILABILITY OF HEALTHY SIGNAL IN SPACE.....	8
3.2	GALILEO SIGNAL IN SPACE RANGING ACCURACY.....	11
4	UTC AND GGTO DISSEMINATION AND DETERMINATION PERFORMANCE	16
4.1	AVAILABILITY OF THE GALILEO TIME CORRELATION PARAMETERS AND OF UTC DETERMINATION.....	16
4.2	ACCURACY OF GALILEO TIME CORRELATION PARAMETERS.....	18
5	GALILEO POSITIONING PERFORMANCE	21
5.1	AVAILABILITY OF THE GALILEO POSITION DILUTION OF PRECISION	21
5.2	AVAILABILITY OF THE GALILEO POSITIONING SERVICE	22
5.3	GALILEO MEASURED POSITIONING PERFORMANCE	24
6	TIMELY PUBLICATION OF NOTICE ADVISORY TO GALILEO USERS (NAGUS)	31
7	REFERENCES.....	34
8	LIST OF ACRONYMS	35

LIST OF FIGURES

Figure 1 : "Per-Slot" availability of HEALTHY Signal in Space for the reporting period.....	8
Figure 2 : "Per-Slot" availability of HEALTHY Signal in Space for the reporting period, not normalised.....	9
Figure 3 : Individual, "Per-Satellite" worst-case SIS availability of HEALTHY Signal in Space for the reporting period	10
Figure 4 : Monthly percentage of availability of "N" Space Vehicles transmitting a Healthy SIS.....	10
Figure 5 : Worst-case, monthly Galileo SIS Ranging Accuracy (at 95 th and 99.9 th confidence level percentiles) "for any satellite", any SIS (SF and DF combinations)	12
Figure 6 : Monthly Galileo SIS Ranging Accuracy (95 th percentile) "for any satellite", measured during reporting period for worst-case, Dual-Frequency (DF).....	13
Figure 7 : Monthly Galileo SIS Ranging Accuracy (95 th percentile) "for any satellite", measured during the reporting period for worst-case, Single-Frequency (SF).....	14
Figure 8 : Monthly Galileo SIS Ranging Accuracy (95 th percentile) "over all satellites" (constellation average), measured during the reporting period	15
Figure 9 : Monthly availability of the UTC Dissemination Service during the reporting period	16
Figure 10 : Monthly availability of the UTC Determination with assigned Accuracy target during the reporting period.....	17
Figure 11 : Annually normalised availability of the GGTO Determination, during the reporting period.....	18
Figure 12 : Long-term 95 th percentile of UTC Time Dissemination Accuracy.....	19
Figure 13 : Long-term 95 th percentile of UTC Frequency Dissemination Accuracy	20
Figure 14 : Long-term 95 th percentile of GGTO Determination Accuracy.....	20
Figure 15 : Monthly Global Average Availability of PDOP ≤ 6	21
Figure 16 : Monthly Global Availability of PDOP ≤ 6 at Worst User Location	22
Figure 17 : Availability of Positioning at Worst User Location (WUL)	23
Figure 18 : Availability of Positioning at Average User Location (AUL)	23
Figure 19 : Horizontal Positioning Error (HPE) for "Galileo-only" users in January 2021	25
Figure 20 : Horizontal Positioning Error (HPE) for "Galileo-only" users in February 2021.....	26
Figure 21 : Horizontal Positioning Error (HPE) for "Galileo-only" users in March 2021.....	27
Figure 22 : Vertical Positioning Error (VPE) for "Galileo-only" users in January 2021.....	28



Figure 23 : Vertical Positioning Error (VPE) for “Galileo-only” users in February 202129
Figure 24 : Vertical Positioning Error (VPE) for “Galileo-only” users in March 202130

LIST OF TABLES

Table 1 : Galileo Reported Constellation Information..... 2
Table 2 : GSC main information web pages for Galileo status..... 3
Table 3 : MPL Fulfilment Status Dashboard (1/2) 4
Table 4 : MPL Fulfilment Status Dashboard (2/2) 6
Table 5 : GSC web pages for Galileo User Notifications (NAGUs)31
Table 6 : NAGUs published during 1st Quarter of 2021.....33

1 INTRODUCTION

This document is the *Galileo Open Service (IS OS) Public Performance Report* for the period of **January, February and March 2021**. Following the declaration of Initial Services (IS) in December 2016, a new edition is published after each quarter, in order to provide the public with information about the Galileo Open Service measured performance statistics.

The document reports on the following performance parameters, with respect to their Minimum Performance Levels (MPLs) declared in the [OS-SDD]:

- ◇ Galileo Open Service Ranging Performance;
- ◇ Galileo UTC and GGTO Dissemination and Determination Performance;
- ◇ Galileo Positioning Performance;
- ◇ Timely Publication of Notice Advisory to Galileo Users (NAGUs)¹.

The document comprises the following sections:

Section 1: Provides an introduction to this report, including the status of the Galileo constellation over the quarterly reporting period.

Section 2: Provides an executive summary describing the achieved performance. Details are reported in the following chapters.

Section 3: The Open Service Ranging Performance comprises 2 subsections: “Per-slot Availability of HEALTHY Signal in Space” and “Galileo Signal in Space Ranging Accuracy”.

Section 4: The “UTC and GGTO Dissemination and Determination Performance” is presented in two subsections: the “Availability of the Galileo Time Correlation Parameters and of UTC Determination” and the “Accuracy of Galileo Time Correlation Parameters”. Performance is evaluated for the Universal Time Coordinated (UTC) Time & Frequency provision Service and the GST-GPS Time Offset (GGTO) Determination.

Section 5: The “Galileo Positioning Performance” is illustrated in two subsections: “Availability of the Galileo Positioning Service” and “Galileo measured Positioning Performance”.

Section 6: The “Timely Publication of Notice Advisory to Galileo Users (NAGUs)” is analysed.

Section 7: The cited reference documents are listed.

Section 8: The adopted terms, acronyms and abbreviations are defined.

¹ NAGUs are issued publicly by the European GNSS Service Centre (GSC)

Table 1 provides the status of the Galileo constellation for which the performance data has been measured over the reporting period.

Satellite Code	SV ID (PRN)	CCSDS ID [hex]	Orbital Slot	Status
GSAT-0101	11	3A5	B05	Usable
GSAT-0102	12	3A6	B06	Usable
GSAT-0103	19	3A7	C04	Usable
GSAT-0201	18	261	not-nominal	Auxiliary, usable from November 30 th , 2020 up to February 18 th , 2021
GSAT-0202	14	262	not-nominal	
GSAT-0203	26	263	B08	Usable
GSAT-0205	24	265	A08	Usable
GSAT-0206	30	266	A05	Usable
GSAT-0207	7	267	C06	Usable
GSAT-0208	8	268	C07	Usable
GSAT-0209	9	269	C02	Usable
GSAT-0210	1	26A	A02	Usable
GSAT-0211	2	26B	A06	Usable
GSAT-0212	3	26C	C08	Usable
GSAT-0213	4	26D	C03	Usable
GSAT-0214	5	26E	C01	Usable
GSAT-0215	21	2C5	A03	Usable
GSAT-0216	25	2C6	A07	Usable
GSAT-0217	27	2C7	A04	Usable
GSAT-0218	31	2C8	A01	Usable
GSAT-0219	36	713	B04	Usable
GSAT-0220	13	704	B01	Usable
GSAT-0221	15	705	B02	Usable
GSAT-0222	33	706	B07	Usable

Table 1 : Galileo Reported Constellation Information

According to NAGUs [2020019](#) , [2020020](#), and [2020021](#), the two Galileo Space Vehicles GSAT-0201 (E18) and GSAT-0202 (E14) have been declared usable since 30/11/2020 @ 08:32, until 18/02/2021@ 09:30 UTC. The reason for their temporary removal from the provision of active

service, notified with NAGU [2021008](#), is clarified by Galileo Service Notice #05 (SNGU [2021001](#), [SvNOTE #5]).

During the period when those satellites are declared usable, they are considered as “Auxiliary” satellites [SvNOTE #4]. Therefore, it is expected that they contribute positively when their SIS is healthy, and will in any case never worsen the positioning and timing performance experienced by the users. Thus, their Ranging Accuracy is monitored and is subject to the same MPL thresholds as all the other active Galileo Space Vehicles.

Nevertheless, as they occupy non-nominal orbital slots, their availability does not contribute to the Per-Slot Availability of Healthy SIS. Moreover, for such satellites there is no commitment on the availability of their healthy SIS.

For the most up-to-date information about the Galileo Constellation, please refer to the information published by the European GNSS Service Centre (GSC) on its website:

GNSS Service Centre Web Resources	
Constellation Status Information	https://www.gsc-europa.eu/system-service-status/constellation-information
Reference Constellation Orbital and Technical Parameters	https://www.gsc-europa.eu/system-service-status/orbital-and-technical-parameters
Incident Reporting (Galileo Incidents Report Form)	http://www.gsc-europa.eu/helpdesk → “Report a Galileo Incident”
Interactive support to users (Galileo Help Desk)	http://www.gsc-europa.eu/helpdesk → “Raise your questions”

Table 2 : GSC main information web pages for Galileo status

The Galileo Helpdesk at GSC allows close interaction with users, both to support the exploitation of Galileo services and to collect relevant information on signal performance as observed by the users.

The GSC is also responsible for providing the Notice Advisory to Galileo Users (NAGU) messages, as detailed in Section 6.

2 EXECUTIVE SUMMARY

During the quarterly reporting period under consideration, the measured Galileo Open Service performance figures exceed the Minimum Performance Level (MPL) targets specified in the [OS-SDD], in all cases. The following dashboards summarise the compliance with MPLs, using the colour coding defined in the legend below:

OS MPLs	Target Value	Space Vehicle	January-21					February-21					March-21				
			E5a-E1	E5b-E1	E1	E5a	E5b	E5a-E1	E5b-E1	E1	E5a	E5b	E5a-E1	E5b-E1	E1	E5a	E5b
Signal In Space (SIS) Ranging Accuracy, Any Satellite	≤ 7m [95%]	GSAT-0101 E11															
		GSAT-0102 E12															
		GSAT-0103 E19															
		GSAT-0201 E18															
		GSAT-0202 E14															
		GSAT-0203 E26															
		GSAT-0205 E24															
		GSAT-0206 E30															
		GSAT-0207 E07															
		GSAT-0208 E08															
		GSAT-0209 E09															
		GSAT-0210 E01															
		GSAT-0211 E02															
		GSAT-0212 E03															
		GSAT-0213 E04															
		GSAT-0214 E05															
		GSAT-0215 E21															
		GSAT-0216 E25															
		GSAT-0217 E27															
		GSAT-0218 E31															
		GSAT-0219 E36															
		GSAT-0220 E13															
GSAT-0221 E15																	
GSAT-0222 E33																	

Table 3 : MPL Fulfilment Status Dashboard (1/2)

Legend

	MPL measurement not available
	Target Value for MPL is fulfilled
	Target Value for MPL is NOT fulfilled (less than 10% away from the Target Value)
	Target Value for MPL is NOT fulfilled (more than 10% away from the Target Value)

OS MPLs		Target Value	Jan-21	Feb-21	Mar-21		
SIS Ranging	Accuracy, Over All Satellites	E1/E5a user	≤ 2m [95%]				
		E1/E5b user					
		E1 user					
		E5a user					
		E5b user					
	Availability	Per-slot	E1/E5a	≥ 87%			
			E1/E5b				
			E1				
			E5a				
			E5b				
Positioning and DOP	Availability	PDOP – F/NAV (E5a SIS)	≤ 6				
		PDOP – I/NAV (E1-B and E5b SIS)	≤ 6				
		DF, at Average User Location	≥ 77%				
		SF, at Average User Location	≥ 77%				
		DF, at Worst User Location	≥ 70%				
		SF, at Worst User Location	≥ 70%				

OS MPLs			Target Value	Jan-21	Feb-21	Mar-21
Timing	Accuracy	UTC Time Dissemination	≤ 30ns [95%]			
		UTC Frequency Dissemination	< 3E-13 [95%]			
		GGTO Determination	≤ 20ns [95%]			
	Availability	UTC Dissemination	≥ 87%			
		UTC Determination Accuracy	≥ 87%			
		GGTO Determination	≥ 80%			
User Interface	NAGU	Planned Timeliness	≥ 1 day			
		Unplanned Timeliness	≤ 3 days			

Table 4 : MPL Fulfilment Status Dashboard (2/2)

The “per-slot” **Availability of a Healthy Signal**, with averaged monthly values greater than **99.29%** for every Single-Frequency (E1-B, E5a, E5b) and Dual-Frequency combination (E1/E5a, E1/E5b), is considerably above the MPL threshold of **87%**. The monthly figures are then normalised annually, according to the MPL definition, by a moving average applied over the most recent 12 months.

The **Signal in Space Ranging Accuracy** shows a 95th percentile monthly accuracy between **0.18 [m]** and **1.27 [m]** for individual space vehicles (“Any Satellite”) on Single Frequency observables.² For Dual Frequency signal combinations³, the figure is in the range from **0.14 [m]** to **0.39 [m]**. Compliance with the [OS-SDD] MPL, where the threshold is specified as 7 [m], is achieved with considerable margins by all satellites of the Galileo constellation.

The average **Ranging Accuracy at constellation level** (over “All Satellites”) provides figures “per signal” that are better than or equal to **0.34 [m]** for Single Frequency signals and **0.16 [m]** for Dual Frequency signal combinations. Achieved results are almost one order of magnitude better than the specified MPL threshold of 2 [m].

Concerning the UTC Time related Service, both **Availability of the Dissemination** and **Availability of Determination with a given Accuracy** (i.e.: better than 31 [ns]) are characterised. In both cases, metrics had a monthly value of **100%** during all the quarterly reporting period, while the [OS-SDD] MPL targets are **87%**.

The **Availability of GGTO Determination** metric was **99.12%** during the first month and **99.67%** in February and March. Annually normalised figures provided in §4.1 are obtained with an average

² Ranging measurements on the OS signals E1, E5a, E5b.

³ Ranging measurements on OS signal combinations E1/E5a, E1/E5b.

applied over the last 12 months. The measured values are comfortably above the [OS-SDD] MPL target of **80%**.

Good values are also achieved for the **UTC Time Dissemination Service Accuracy** (≤ 4.4 [ns] during the reporting period), the **UTC Frequency Dissemination Service Accuracy** (normalised offset $\leq 1.4 \times 10^{-14}$) and the **GGTO Determination Accuracy** (≤ 4.6 [ns] in the reporting quarter). The [OS-SDD] MPL targets, which are respectively **30** [ns], 3×10^{-13} and **20** [ns], are all met; all figures related to time accuracy are computed by accumulating daily measurement samples over the previous 12 months.

The [OS-SDD] includes commitments related to a full **3D Positioning Service** that are consistent with the achieved deployment status of the Galileo constellation, which currently includes 22 space vehicles actively contributing to the provision of navigation services. Associated metrics are as follows:

Both for F/NAV and I/NAV, the **Availability of Global PDOP ≤ 6** was **99.89%** in January, at least **99.94%** in February and equal to **99.99%** in March, against a target MPL of **77%**.

Availability of Positioning, given the conditions that 95% HPE ≤ 7.5 [m] and, at the same time, 95% VPE ≤ 15 [m], totals for any Single-Frequency SIS or Dual-Frequency combination:

- in January, at least **99.83%** at WUL and **99.98%** at AUL;
- in February, at least **99.86%** at WUL and **99.99%** at AUL;
- in March, at least **99.98%** at WUL and **99.99%** at AUL.

The target MPL values are **70%** at WUL and **77%** at AUL, thus met with large margin.

The availability figures are complemented with measured “Galileo-only” 3D positioning performance, attainable when PDOP ≤ 6 . These metrics are not currently subject to an MPL target, but are reported because of their relevance, and obtained by processing data from a real network of receivers. For Dual-Frequency combinations (E1/E5a and E1/E5b), the 95th percentile of **Horizontal and Vertical 3D Positioning Errors** (HPE and VPE, correspondingly) did not exceed **1.90** [m] and **3.31** [m] respectively during the reporting period, as measured by the GSA network of reference receivers. The corresponding RMS values, which are also not subject to an MPL assessment, are respectively **1.06** [m] and **1.74** [m].

Regarding **Publication of NAGUs**, [OS-SDD] MPLs are met during the whole period for both Planned and Unplanned events. The target of at least **24** hours before the start of a scheduled event, as well as not more than **72** hours after an unscheduled one, is achieved in all cases. Additional details about NAGU timeliness are presented in § 6.

3 OPEN SERVICE RANGING PERFORMANCE

In this section of the report the following performance figures for the Galileo Open Service are provided:

- ◇ Per-slot Availability of HEALTHY Signal in Space (annually normalised MPL, and monthly average provided for info);
- ◇ Galileo Signal in Space Ranging Accuracy (MPL at 95% confidence level, and metric at 99.9% confidence level delivered for info).

3.1 PER-SLOT AVAILABILITY OF HEALTHY SIGNAL IN SPACE

The “Availability of HEALTHY Signal in Space” is defined, for each Galileo operational satellite in a nominal slot, as the percentage of time that the specific satellite broadcasts Galileo Open Service Signals in Space that are considered “HEALTHY” according to [OS-SDD] rules regarding the configuration of specific L-band SIS status flags and the validity period of Navigation messages.

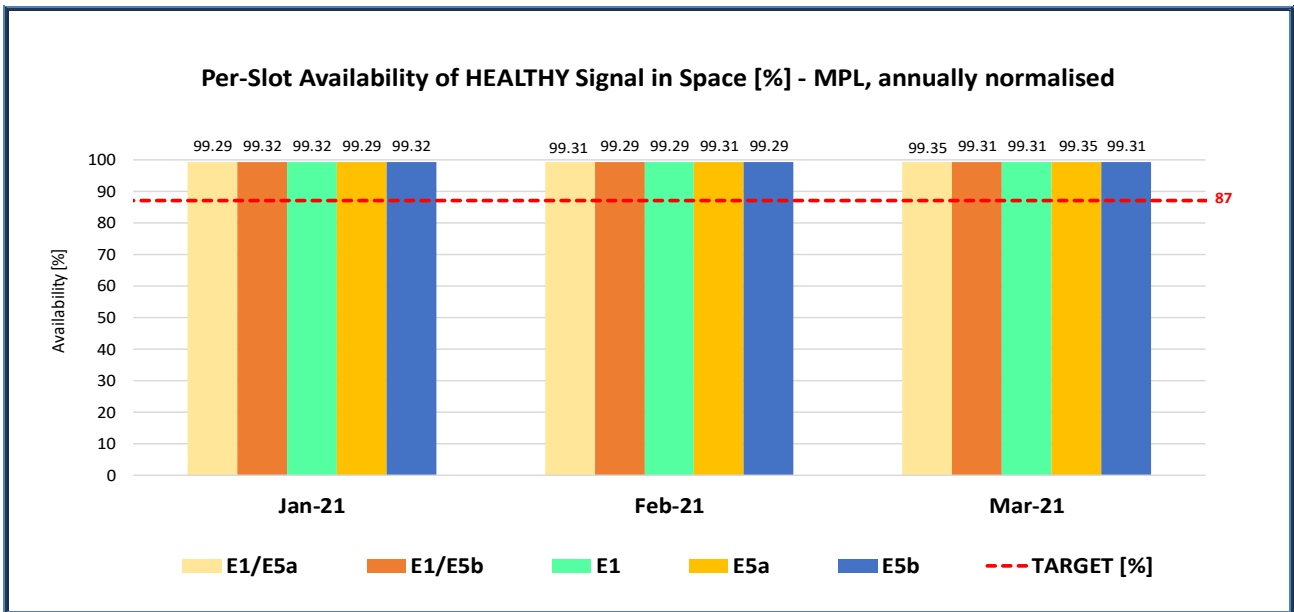


Figure 1 : “Per-Slot” availability of HEALTHY Signal in Space for the reporting period

Figure 1 provides the Signal in Space “per slot” availability of Galileo HEALTHY Signals in Space, averaged over the entire constellation during the reporting period and normalised annually.⁴ The

⁴ The [OS-SDD] foresees an “annual normalisation”, which is implemented with an incremental averaging process, accumulating data over the previous 12 months. Data for each month takes into account only those space vehicles that are declared active members of the constellation during the whole month. Auxiliary Space Vehicles GSAT-0201 (E18) and GSAT-0202 (E14) are not included.

[OS-SDD] Minimum Performance Level (MPL) specifies 87%⁵ as the target value for this constellation metric. The achieved performance is between 99.29% (Single Frequency SIS E5a and Dual Frequency combination E1-E5a in January, SF SIS E1, SF SIS E5b and DF combination E1-E5b in February) and 99.35% (SF SIS E5a, DF combination E1-E5b in March).

Figure 2 provides again the Signal in Space “per slot” availability of Galileo HEALTHY Signals in Space, averaged over the entire constellation during each month, but now not normalized; as such, this magnitude is not subject to MPL target and is provided for info:

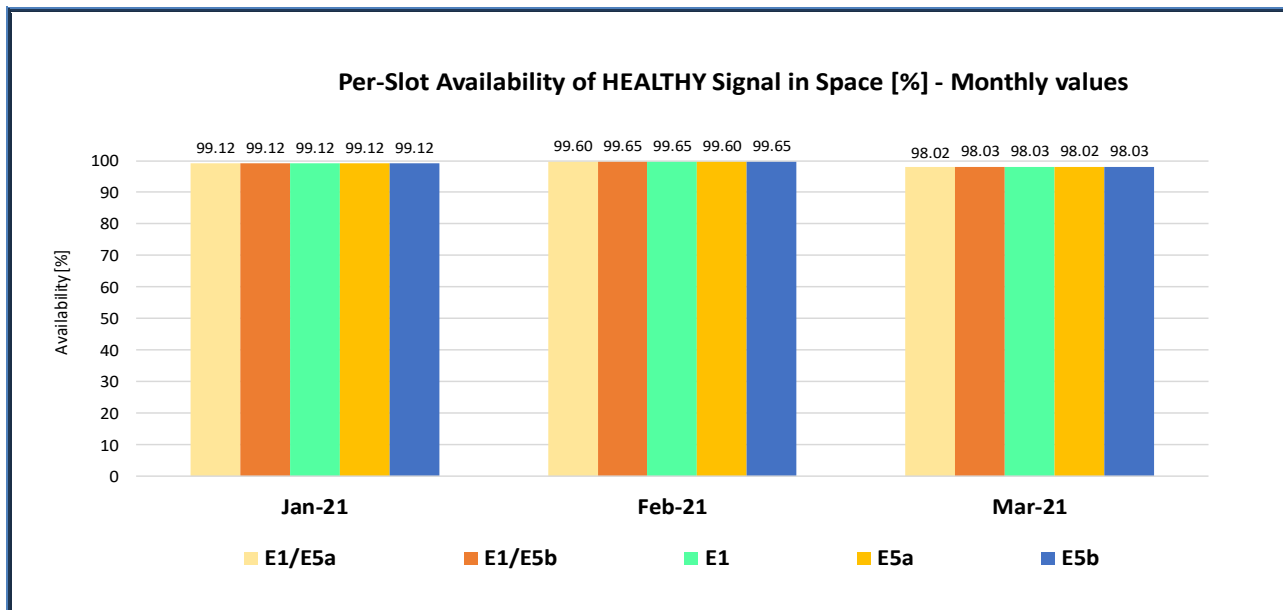


Figure 2 : “Per-Slot” availability of HEALTHY Signal in Space for the reporting period, not normalised

The availability of Galileo HEALTHY SIS, evaluated individually per frequency combination, satellite and month (without any averaging/normalization), is not subject to an MPL target. During the quarter, referring only to satellites occupying nominal orbit slots, low values were observed for the following Space Vehicles, as shown in Figure 3:

- In January:
 - all achieved a monthly availability of healthy SIS equal to 100%, with the exception of GSAT-0101 (E11): 99.52%, all SIS; GSAT-0102 (E12): 93.46%, all SIS; GSAT-0215 (E21): 93.81, all SIS; GSAT-0222 (E33), 93.82, all SIS.
- In February:
 - all achieved a monthly availability of healthy SIS equal to 100%, with the exception of GSAT-0103 (E19): 99.98%, all SIS; GSAT-0211 (E02): 99.23% for E1/E5b, E1, E5b; GSAT-0207 (E07): 99.24 for E1-E5a, E5a; GSAT-0215 (E21): 92.01% for E1-E5a, E5a; 92.98% for E1-E5b, E1, E5b;

⁵ Ref.: [OS-SDD] issue 1.1, §3.4.1 (Table 13)

- In March:
 - all achieved a monthly availability of healthy SIS equal to 100%, with the exception of GSAT-0217 (E27): 99.87% for E1-E5a, E5a; GSAT-0219 (E36), 56.61% all SIS. Note that E36 was subject to an unplanned (emergency) series of orbit correction manoeuvres to avoid collision with a large space debris.

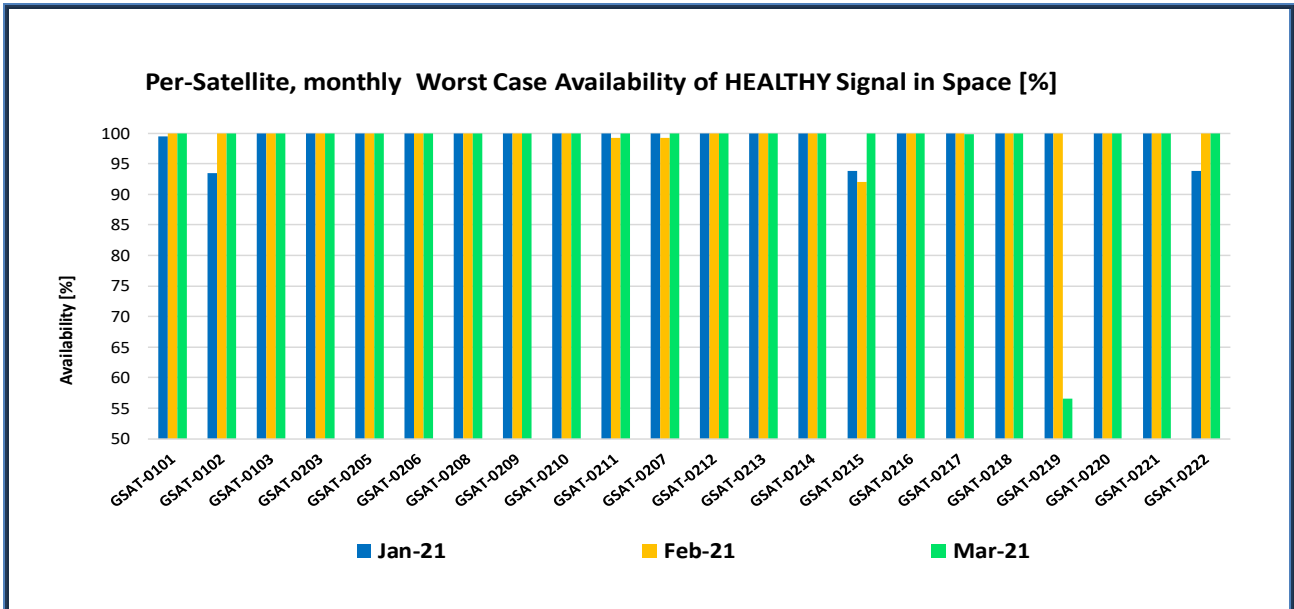


Figure 3 : Individual, "Per-Satellite" worst-case SIS availability of HEALTHY Signal in Space for the reporting period

In addition to that, Figure 4 provides the monthly percentage of availability of "N" Space Vehicles simultaneously transmitting a Healthy SIS:

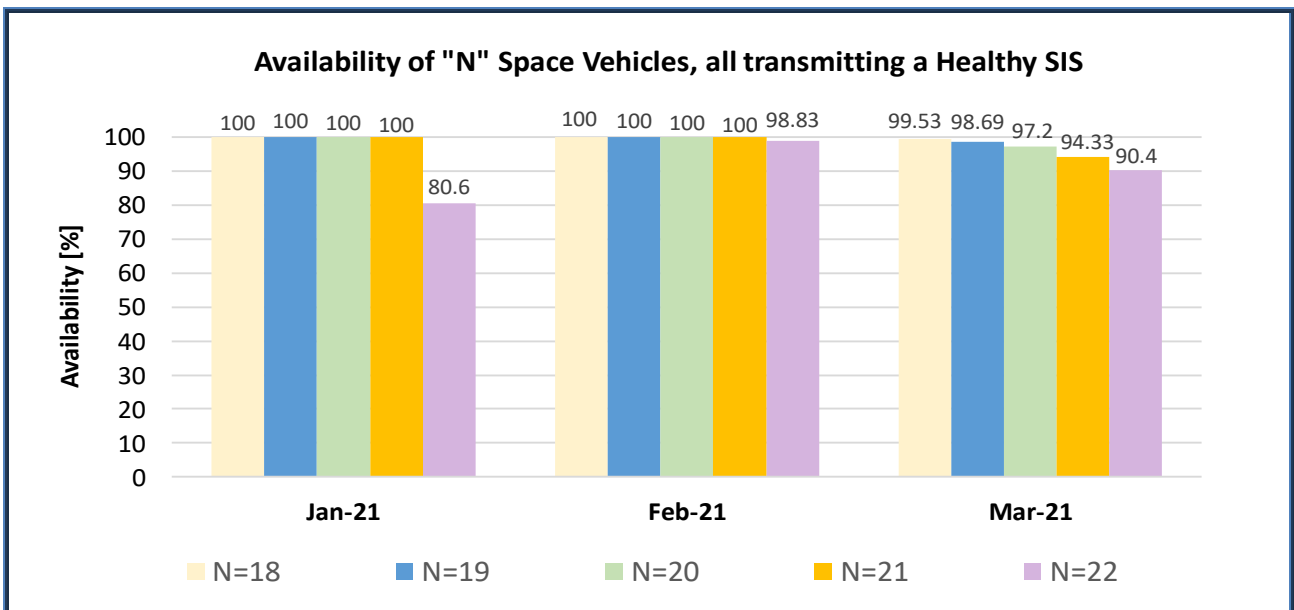


Figure 4 : Monthly percentage of availability of "N" Space Vehicles transmitting a Healthy SIS

3.2 GALILEO SIGNAL IN SPACE RANGING ACCURACY

The Galileo Signal In Space Error (SISE) vector provides the instantaneous difference between the Galileo satellite position/clock offset as obtained from the broadcast Navigation message, and the “true” satellite position/clock offset. The true orbit path and clock performance are precisely reconstructed using sophisticated tools. When projecting SISE to the user location, the obtained scalar value is also named Ranging Accuracy and represents the ranging error affecting a user receiver. The following figures show the 95th percentile of the monthly global average of the instantaneous Ranging Accuracy, achieved for each Galileo operational satellite and Single Frequency/Dual Frequency combinations. Projection of SISE is implemented at the nodes of a virtual grid, representing all user locations within the Navigation Service coverage area. Any signals carrying Navigation message information with Age of Time of Ephemeris beyond the validity period of 4 hours are filtered out, as per [OS-SDD] and explained in §5.3.

Figure 6 and Figure 7 show the monthly 95% confidence level metric for Galileo Signal in Space Ranging Accuracy, to be compared against the MPL target levels. Computation is applied “for any space vehicle”, over all satellites ⁶ and frequency combinations ⁷, achieving the following results:

- for individual space vehicles in **January**, worst case values of **0.33** [m] for Dual Frequency and **0.61** [m] for Single Frequency. The best case values over the month are **0.14** [m] and **0.19** [m], respectively.
- for individual space vehicles in **February**, worst case values of **0.39** [m] for Dual Frequency and **1.27** [m] for Single Frequency. The best case values over the month are **0.15** [m] and **0.18** [m], respectively. The unusual value of 1.27 [m] is only due to the Auxiliary satellite GSAT-0202 (E14), root cause is the occasional broadcast of inaccurate BGD coefficients for Single-Frequency users.
- for individual space vehicles in **March**, worst case values of **0.39** [m] for Dual Frequency and **0.60** [m] for Single Frequency. The best case values over the month are **0.14** [m] and **0.19** [m], respectively.

In order to achieve a better view on Galileo ranging performance, the following Figure 5 provides the worst-case Ranging Accuracy values at both 95% confidence level (as per [OS-SDD] MPL) and at 99.9% confidence level, the latter not being subject to any target and given for information.

⁶ Satellites in nominal slots plus Auxiliary Satellites.

⁷ Graphics provide worst-case among all SIS (for Single Frequency) or between E1-E5a / E1-E5b for Dual-Frequency combinations

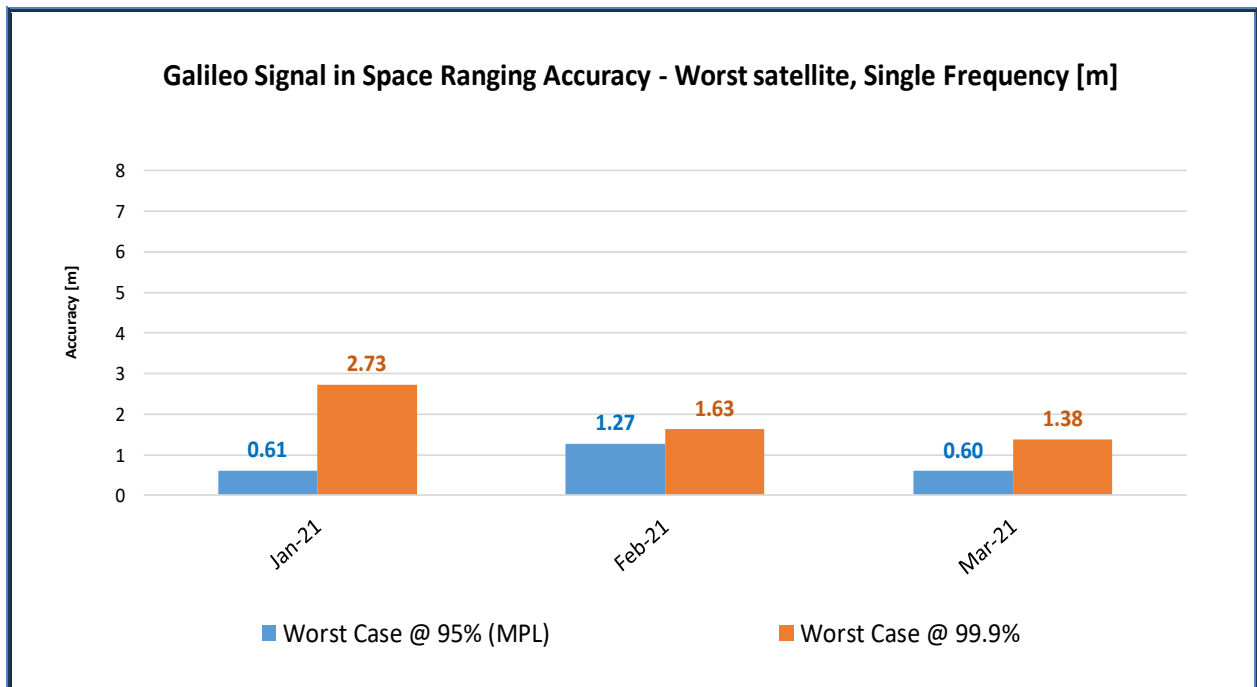
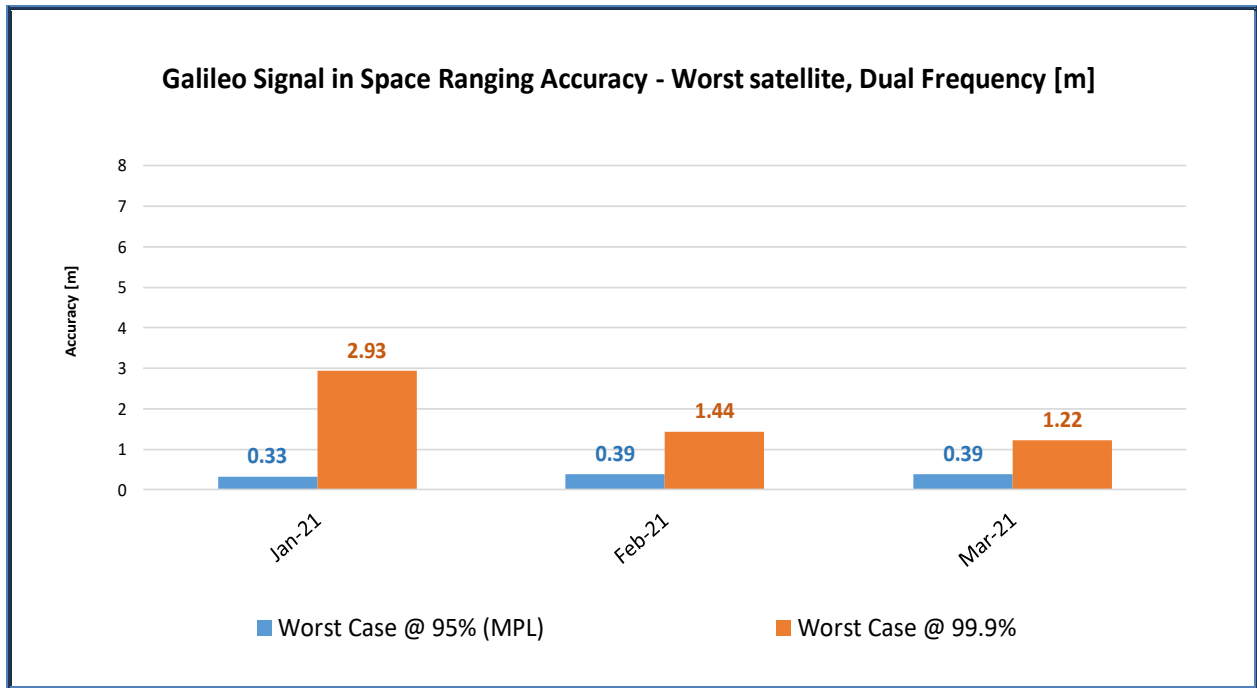


Figure 5 : Worst-case, monthly Galileo SIS Ranging Accuracy (at 95th and 99.9th confidence level percentiles) “for any satellite”, any SIS (SF and DF combinations)

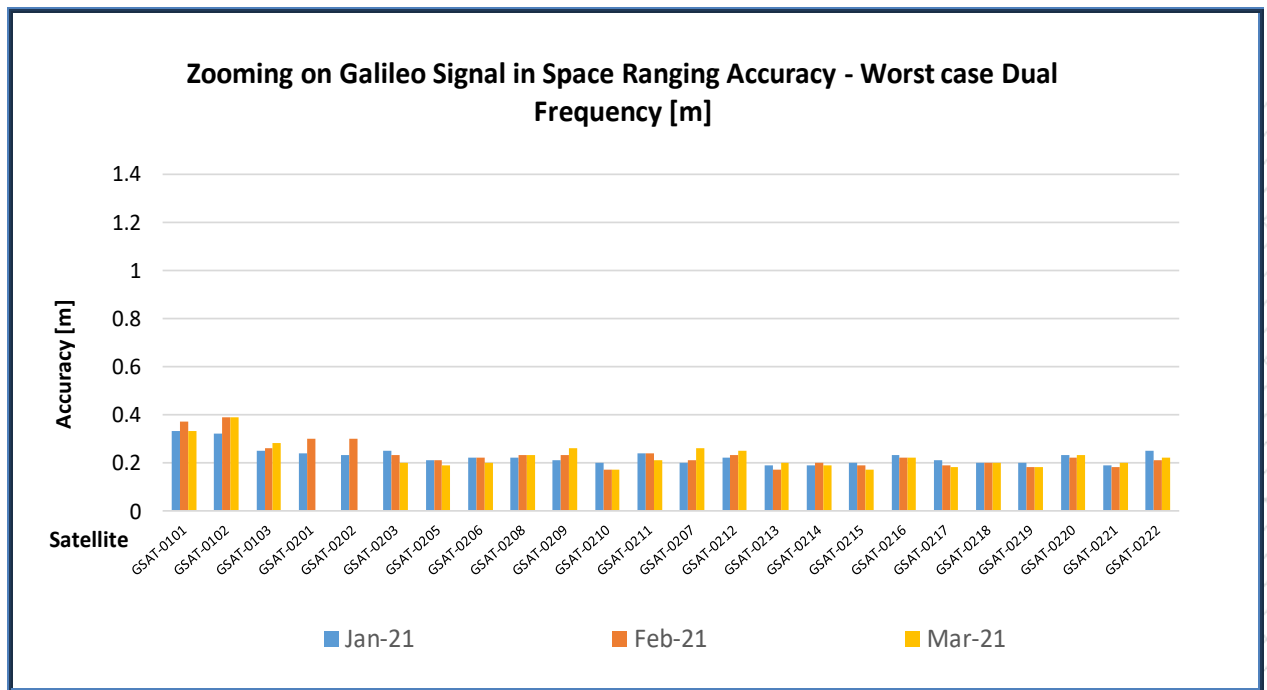
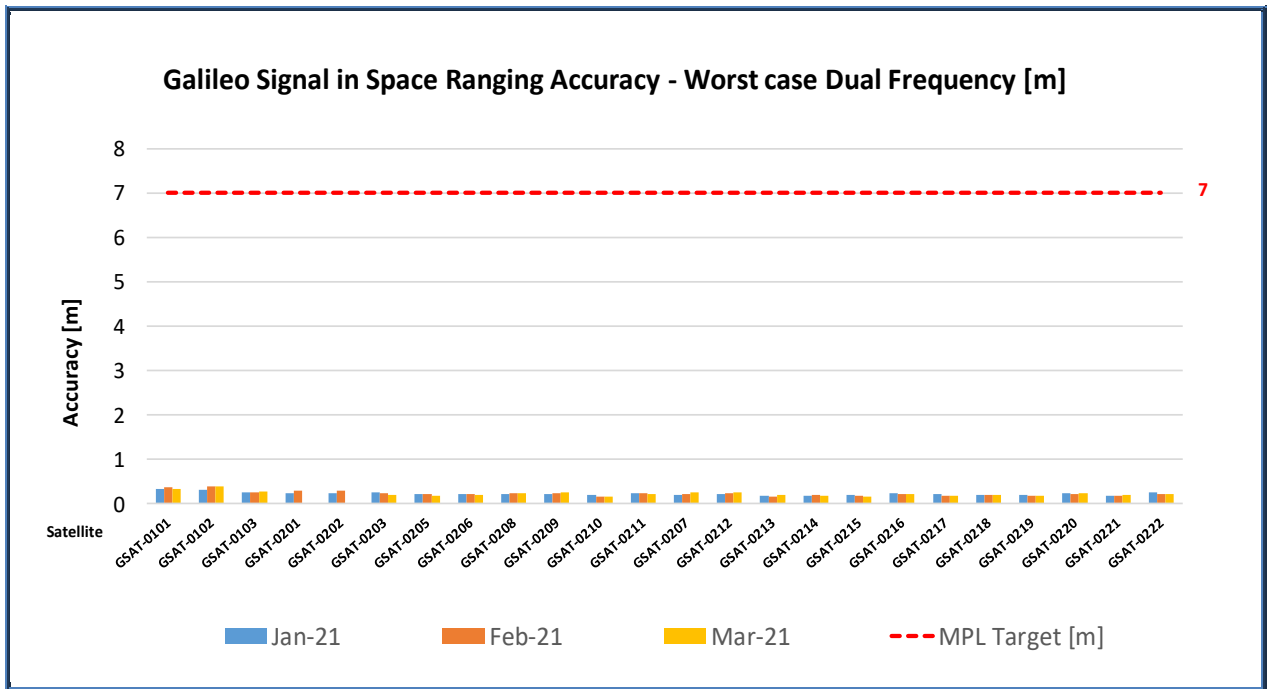


Figure 6 : Monthly Galileo SIS Ranging Accuracy (95th percentile) “for any satellite”, measured during reporting period for worst-case, Dual-Frequency (DF)

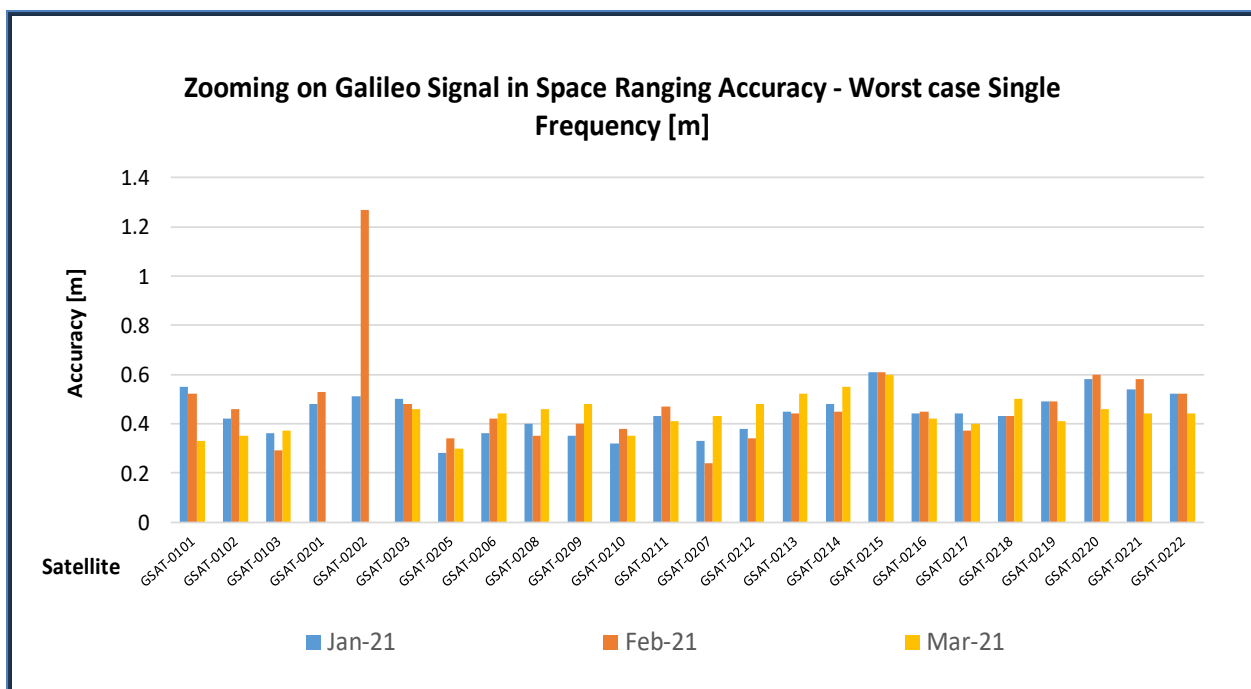
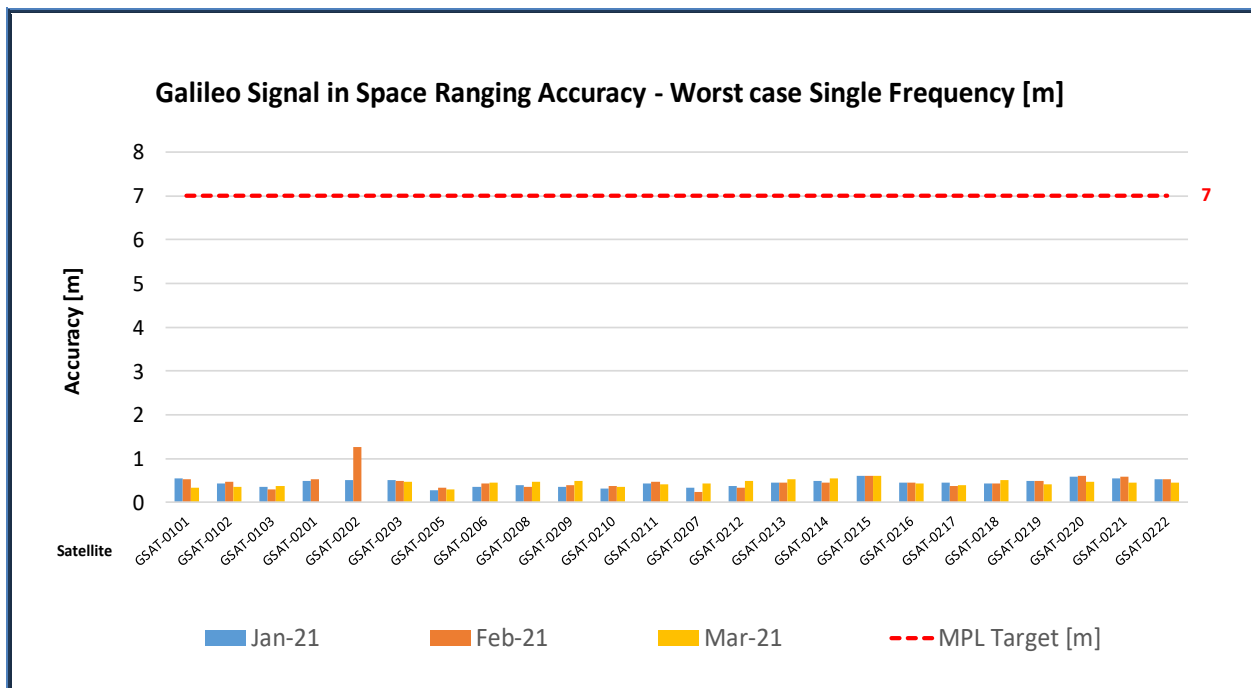


Figure 7 : Monthly Galileo SIS Ranging Accuracy (95th percentile) "for any satellite", measured during the reporting period for worst-case, Single-Frequency (SF)

Compliance with the MPL in [OS-SDD] is achieved in all cases, with a specified maximum threshold of 7 [m]⁸ for the monthly performance of each individual satellite.

Figure 8 depicts the average “over all satellites” (constellation mean). Again, the [OS-SDD] MPL target of 2 [m]⁹ is met by the Constellation average value.

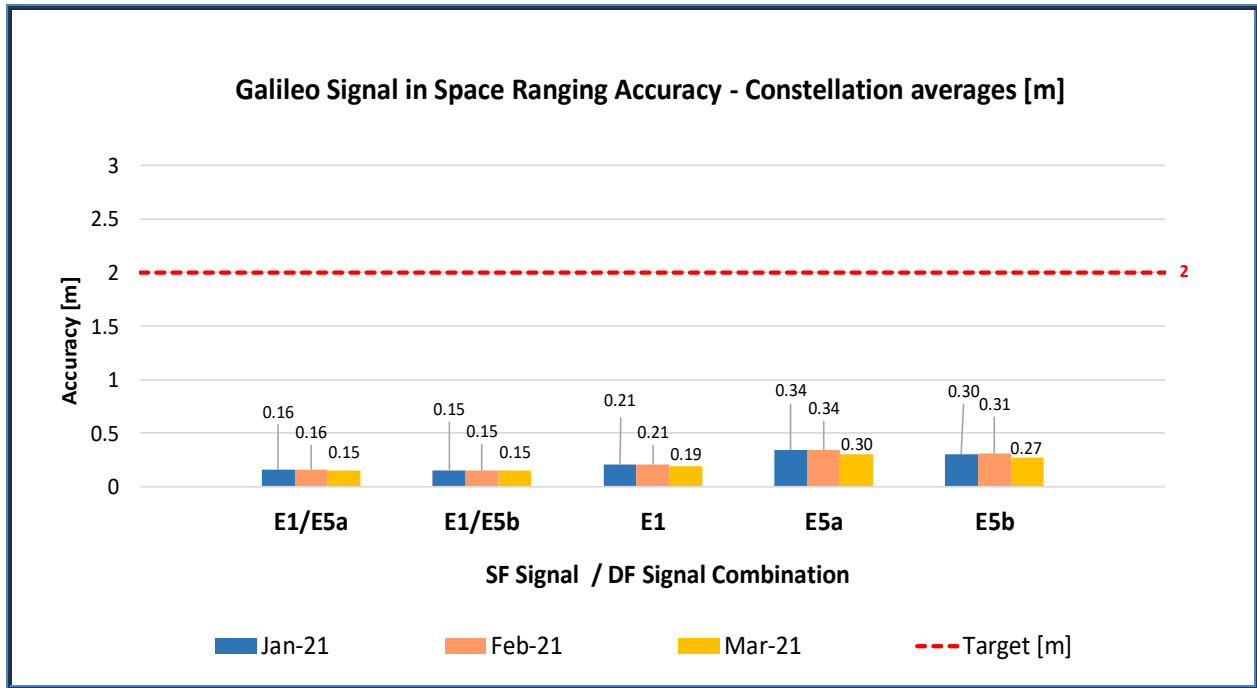


Figure 8 : Monthly Galileo SIS Ranging Accuracy (95th percentile) “over all satellites” (constellation average), measured during the reporting period

⁸ Ref.: [OS-SDD] issue 1.1, §3.3.1 (Table 9)

⁹ Ref.: [OS-SDD] issue 1.1, §3.3.1 (Table 10)

4 UTC AND GGTO DISSEMINATION AND DETERMINATION PERFORMANCE

In this section of the report the following performance figures are provided:

- ◇ Availability of the Galileo Time Correlation Parameters and of UTC Determination;
- ◇ Accuracy of Galileo Time Correlation Parameters.

4.1 AVAILABILITY OF THE GALILEO TIME CORRELATION PARAMETERS AND OF UTC DETERMINATION

The **Availability** of the Galileo Universal Time Coordinated (UTC) Time Dissemination Service is defined as the percentage of time that the system provides at least one HEALTHY ranging/timing Signal in Space above a minimum elevation angle of 5 degrees. Figure 9 provides the Worst User Location (WUL) Availability of such service, computed for a virtual grid of user positions over the service coverage area.

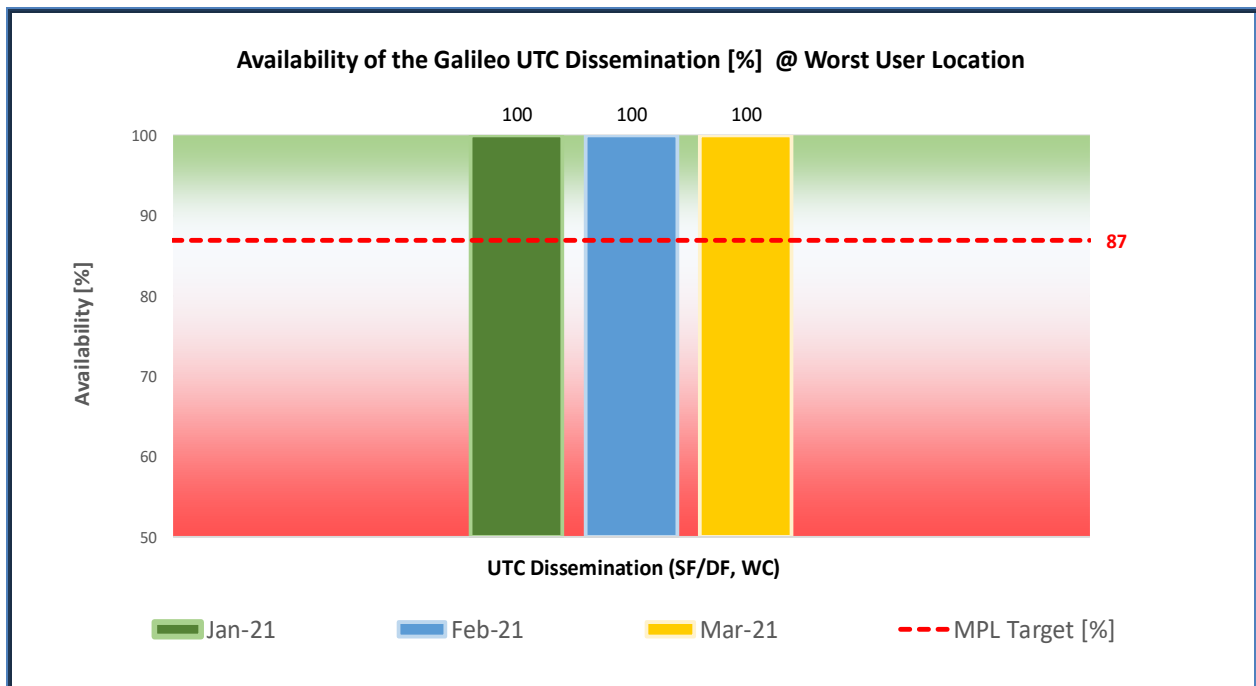


Figure 9 : Monthly availability of the UTC Dissemination Service during the reporting period

As shown in Fig. 6, the monthly (short-term) availability of the Galileo UTC Dissemination Service

achieved 100% during all three months of the reporting period. The MPL of 87%¹⁰ specified by [OS-SDD] for the long term is therefore fulfilled with the maximum margin.

Regarding the commitment concerning the **Availability of UTC Time Determination Service** with the assigned accuracy threshold of 31 [ns], results for the observation period are given in Figure 10, with a required percentage of success of at least 87%. Similarly to the case of UTC Dissemination, targets for Availability are met with an availability of 100% during all quarter:

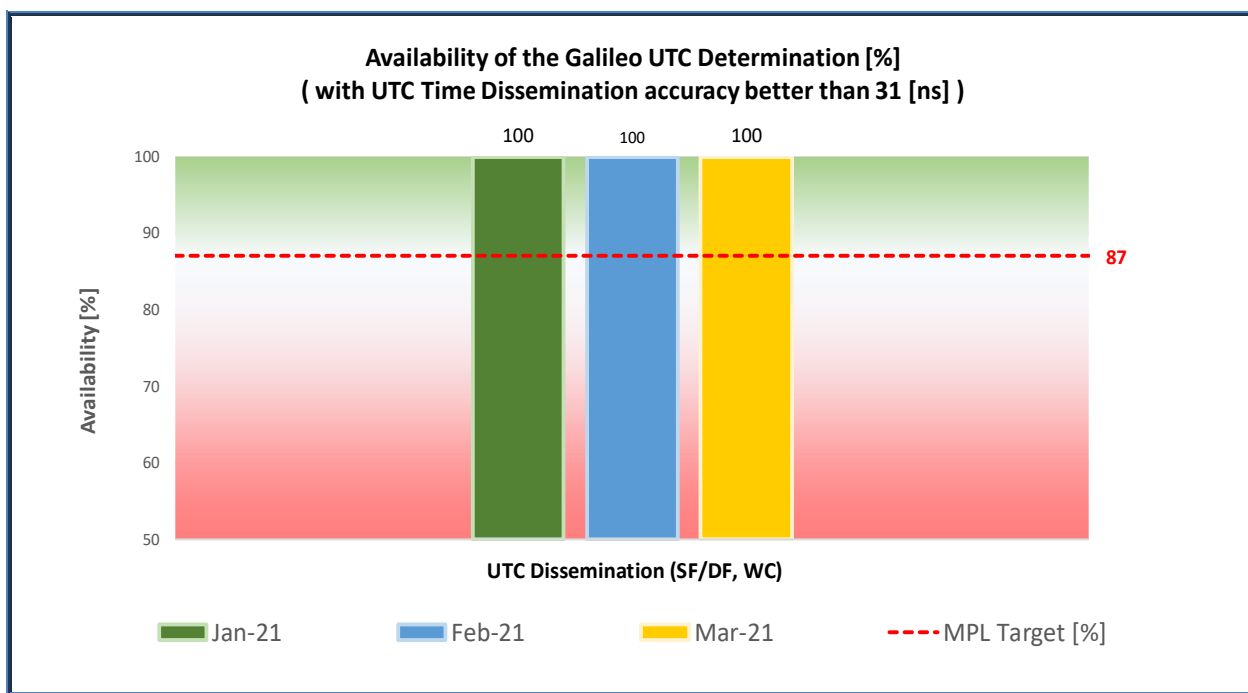


Figure 10 : Monthly availability of the UTC Determination with assigned Accuracy target during the reporting period

The Availability of Galileo to GPS Time Offset (GGTO) Determination is the percentage of time that the system provides at least one non-dummy GGTO¹¹ set of coefficients within the Navigation message, acquiring SiS from a space vehicle seen above a minimum elevation angle of 5 degrees.

Figure 11 gives the availability of the GGTO Determination for Worst User Location (WUL), computed for a virtual grid of user positions over the service coverage area. Values are normalised annually by accumulating data over the previous 12 months, as per [OS-SDD] MPL definition.

¹⁰ Ref.: [OS-SDD] issue 1.1, §3.4.2 (Table 14)

¹¹ “Dummy” GGTO is defined in [OS-SDD] and in Galileo SiS ICD in terms of “all 1’s” appearing in the GGTO parameters binary slot(s) carried by the Navigation message.

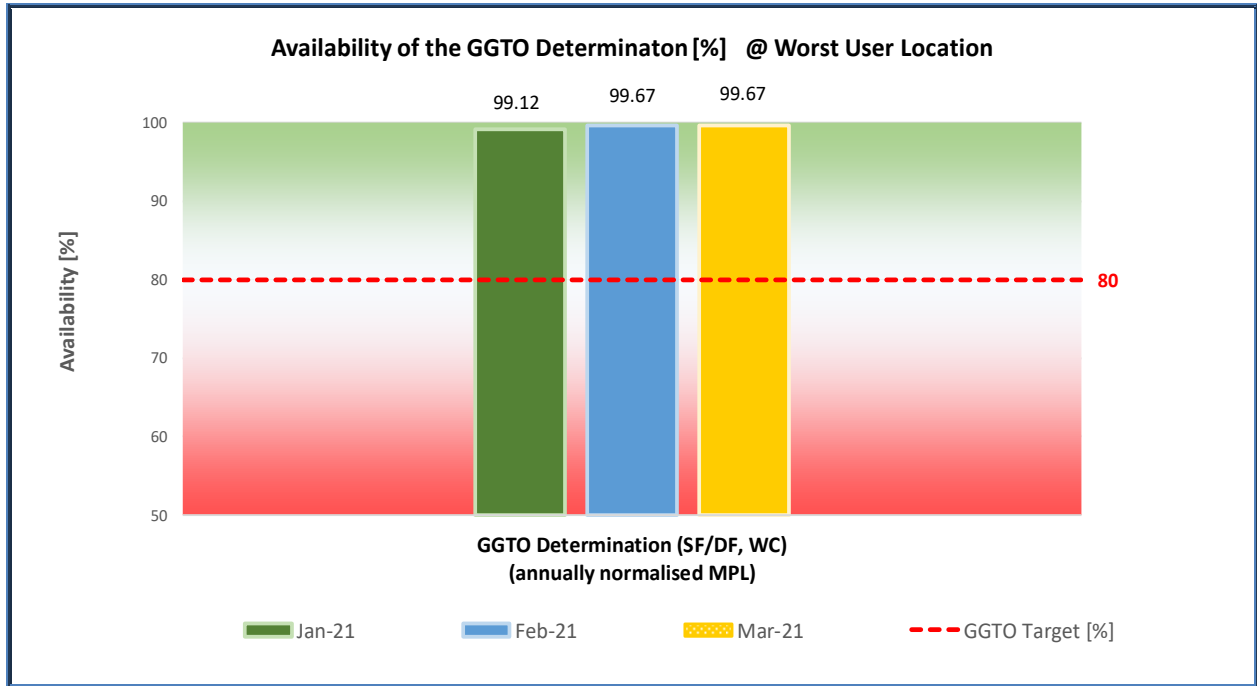


Figure 11 : Annually normalised availability of the GGTO Determination, during the reporting period

The MPL of 80%¹² specified by [OS-SDD] for the long term is fully achieved. The monthly (short-term) Galileo user GGTO Determination capability, which is not shown in the figures and not subject to an MPL target, was 100% in February and March, while January resulted 96.86%, due to the dissemination of “dummy” coefficients over 24 hours, as per NAGUs [2021001](#), [2021002](#).

4.2 ACCURACY OF GALILEO TIME CORRELATION PARAMETERS

The Galileo Signal in Space Universal Time Coordinated (UTC) **Time Dissemination Accuracy** and the Galileo Signal in Space Universal Time Coordinated (UTC) **Frequency Dissemination Accuracy** are computed as the daily average error of the normalised time and frequency offset relative to UTC for a user equipped with a Standard Timing / Calibration Laboratory Receiver¹³.

The Galileo to GPS Time Offset (**GGTO Determination Accuracy**) is computed as the daily average of the difference between the GST-GPS Time Offset computed using the Galileo navigation message and the true GST-GPS Time Offset.

¹² Ref.: [OS-SDD] issue 1.1, §3.5.1.2 (Table 20)

¹³ Note that the final UTC Determination Accuracy experienced by the user will also be affected by ranging errors, on top of the committed UTC Dissemination Accuracy

Figure 12 shows the 95th percentile of the daily average of the UTC Dissemination Accuracy, observed and normalised over a period of 12 months.

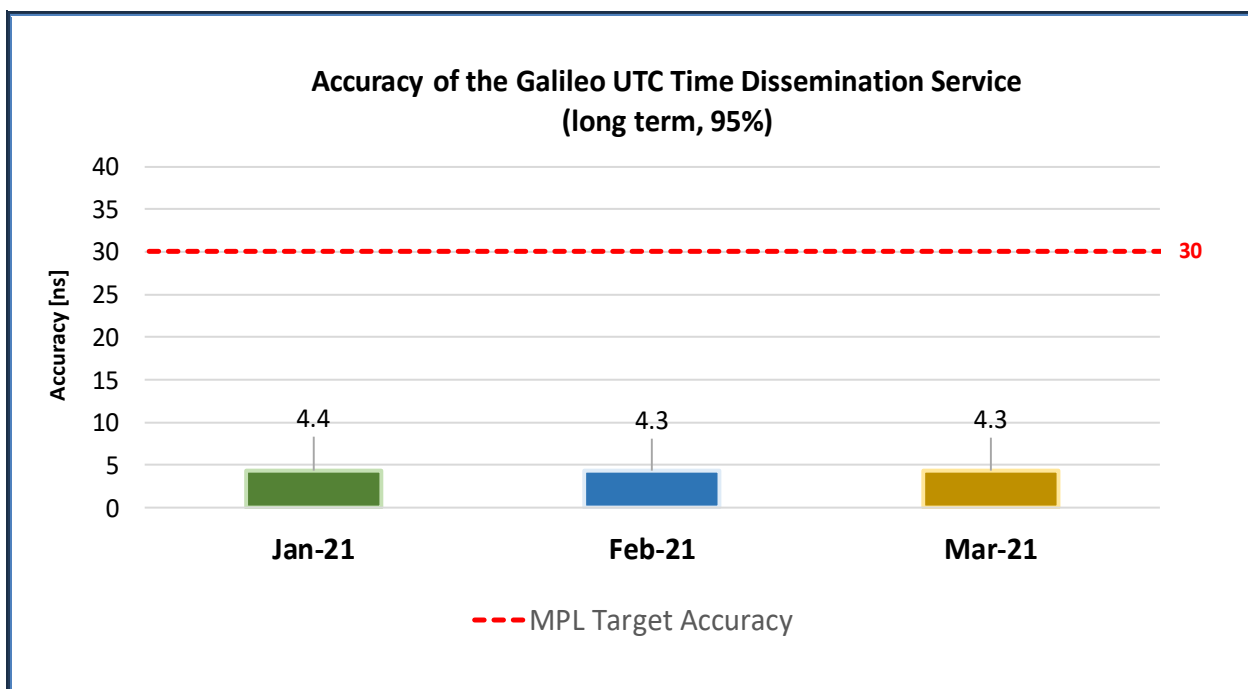


Figure 12 : Long-term 95th percentile of UTC Time Dissemination Accuracy

Figure 13 shows the 95th percentile of the UTC Frequency Dissemination Accuracy, computed accumulating measurement data over the past 12 months¹⁴. Figure 14 shows the 95th percentile of the daily average of the GGTO Determination Accuracy, also normalised annually.

As seen in Figure 12, the long term 95th percentile of UTC (Time) Dissemination Accuracy is back to the best performance level, having reduced the offset up to 4.3 [ns], well below the [OS-SDD] Minimum Performance Level specification of 30 [ns]¹⁵. Regarding UTC Frequency Dissemination accuracy, Figure 13 shows that the measured 95th percentile value is less than or equal to 1.4E-14, which is an order of magnitude better than the [OS-SDD] MPL normalised annual ceiling of 3.0E-13¹⁶.

About the GGTO Determination Accuracy, shown in Figure 14, the measured values are less than or equal to 4.6 [ns] in the quarterly reporting period. These figures are within the [OS-SDD] MPL threshold of 20 [ns]¹⁷, and we recall they are computed with a confidence level of 95%, by accumulating samples over a sliding time window of 12 months

¹⁴ Long-term figures result from processing measurements accumulated since last 12 months

¹⁵ Ref.: [OS-SDD] issue 1.1, §3.3.3 (Table 11)

¹⁶ Ref.: [OS-SDD] issue 1.1, §3.4.4 (Table 12)

¹⁷ Ref.: [OS-SDD] issue 1.1, §3.5.1.2 (Table 19)

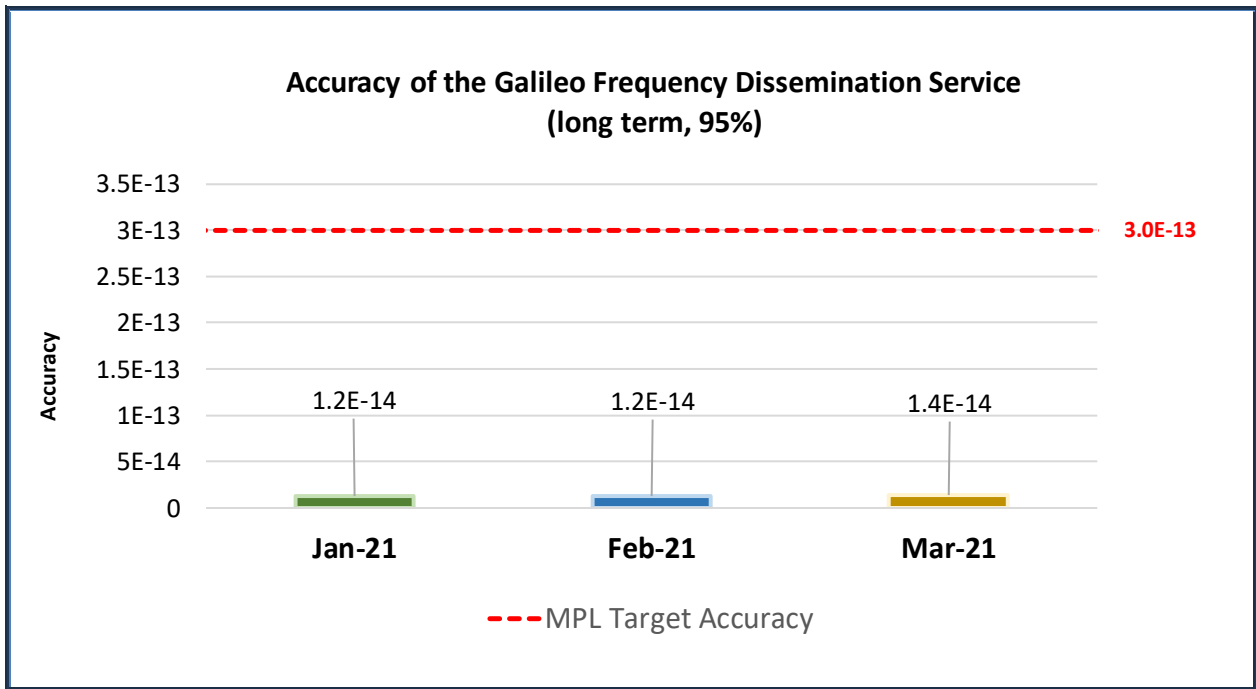


Figure 13 : Long-term 95th percentile of UTC Frequency Dissemination Accuracy

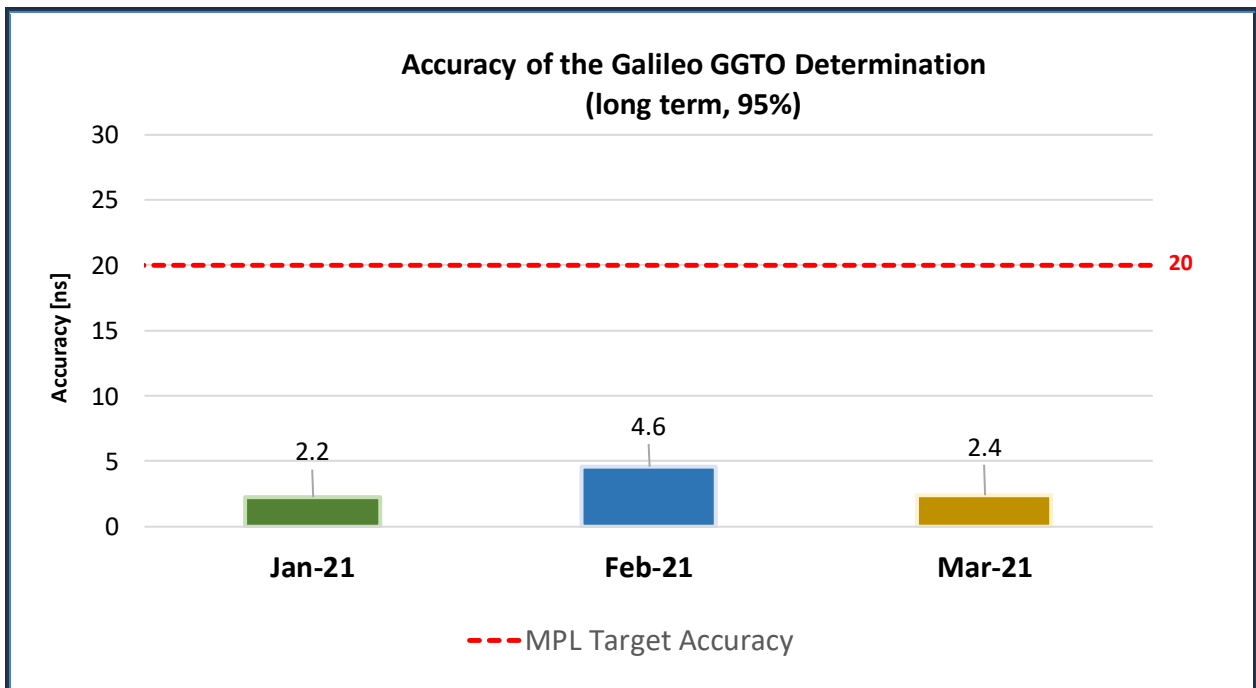


Figure 14 : Long-term 95th percentile of GGTO Determination Accuracy

5 GALILEO POSITIONING PERFORMANCE

In this section of the report the following performance figures are provided for information: These parameters are reported considering only satellites in nominal slots.

- ❖ Availability of the Galileo Position Dilution of Precision;
- ❖ Availability of the Galileo Positioning Service;
- ❖ Galileo measured Positioning Performance.

These parameters are reported considering only satellites in nominal slots.

5.1 AVAILABILITY OF THE GALILEO POSITION DILUTION OF PRECISION

Applicable [OS-SDD] defines an MPL on the global **Availability of a (3D) PDOP** (Position Dilution of Precision) less than or equal to 6, with a target of 77%¹⁸. Results are presented in Figure 15, which distinguishes between the cases of SIS carrying I/NAV or F/NAV messages. With figures of 99.89% at least, the target value is exceeded with significant margin.

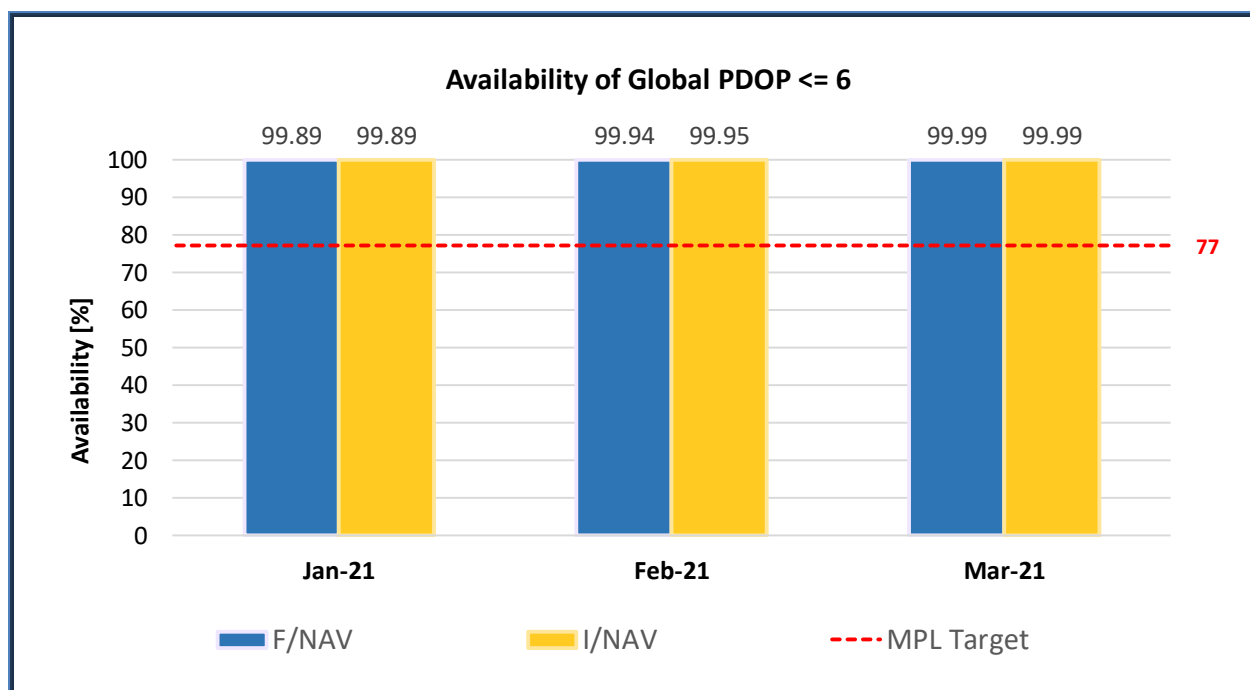


Figure 15 : Monthly Global Average Availability of PDOP ≤ 6

¹⁸ Ref.: [OS-SDD] issue 1.1, §3.4.3 (Table 15)

In addition to that, for the sake of completeness, Figure 16 shows the Availability of a (3D) PDOP ≤ 6 at Worst User Location, which is not currently subject to an MPL target:

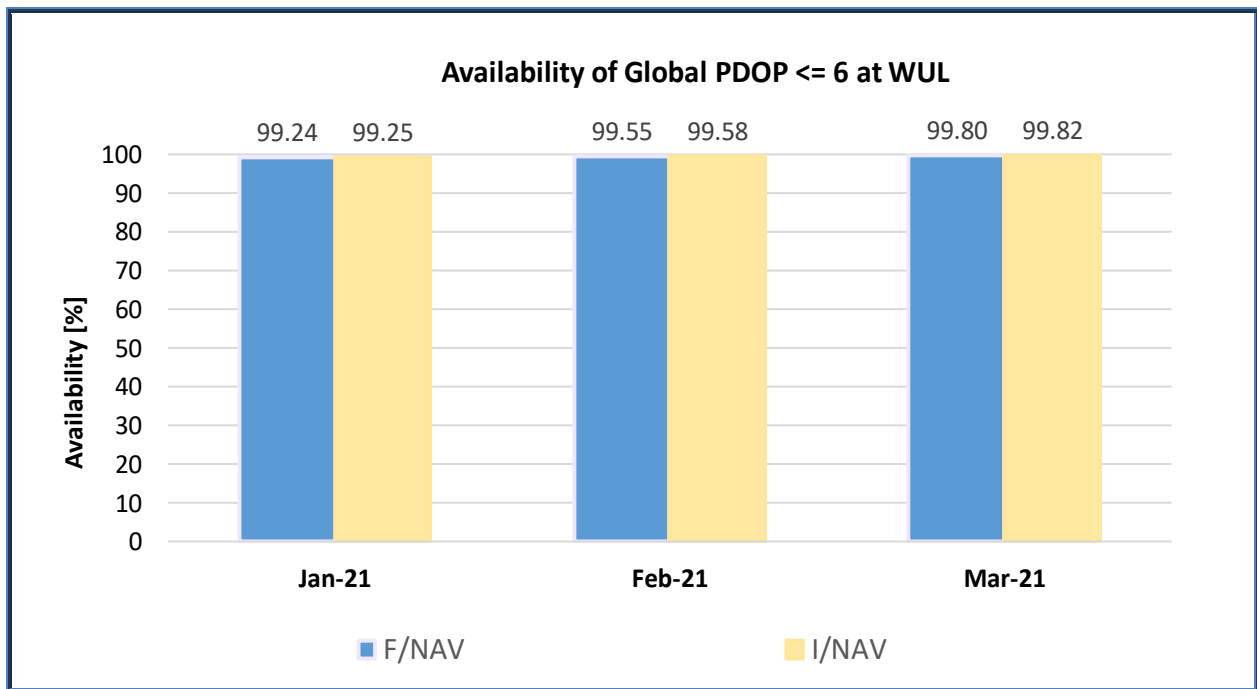


Figure 16 : Monthly Global Availability of PDOP ≤ 6 at Worst User Location

5.2 AVAILABILITY OF THE GALILEO POSITIONING SERVICE

The [OS-SDD] defines the **Availability of Positioning**, under the condition that location error due to system contribution is required to be not worse than **7.5 [m]** for the horizontal component (HPE), and not worse than **15 [m]** for the vertical one (VPE), evaluated at 95%.

Different targets are assigned: **70%**¹⁹ at Worst User Location (WUL), and **77%**²⁰ for the Average User Location (AUL).

The achieved results are shown separately for the case of worst Single Frequency SIS (E1, E5a, E5b) and of worst Dual Frequency combination (E1-E5a, E1-E5b) in the following Figure 17 and Figure 18. Target values are met with large margins.

¹⁹ Ref.: [OS-SDD] issue 1.1, §3.4.4 (Table 17)

²⁰ Ref.: [OS-SDD] issue 1.1, §3.4.4 (Table 16)

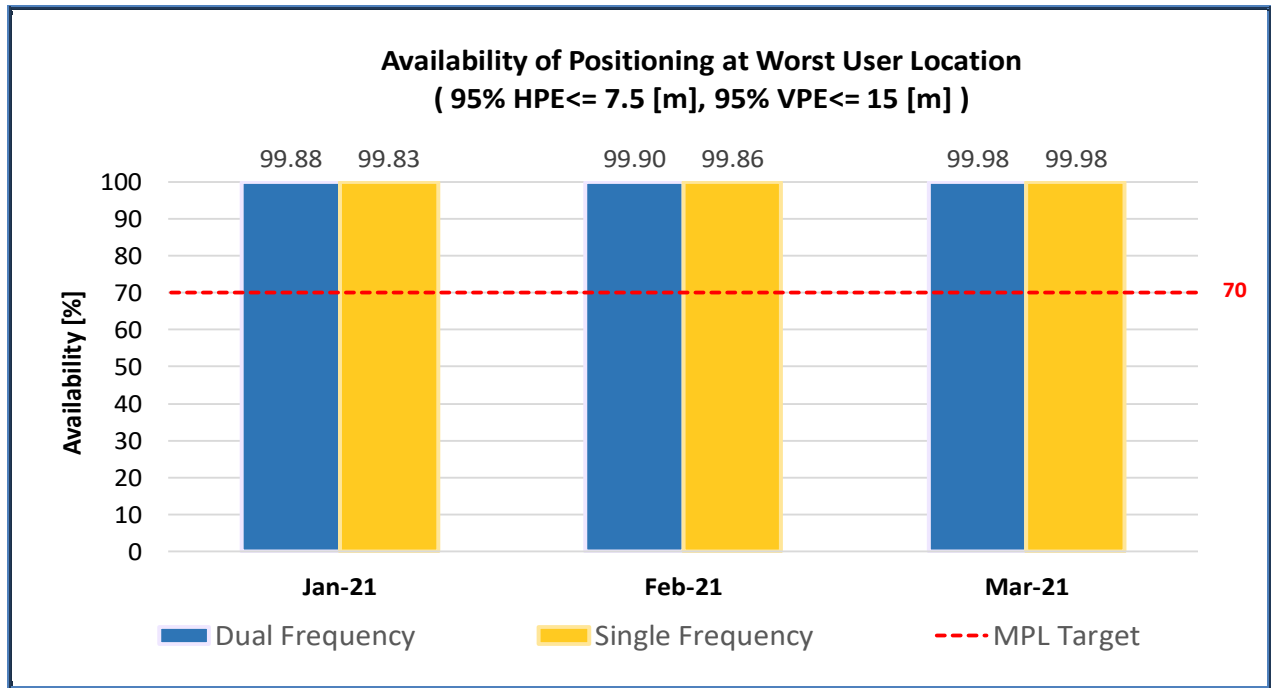


Figure 17 : Availability of Positioning at Worst User Location (WUL)

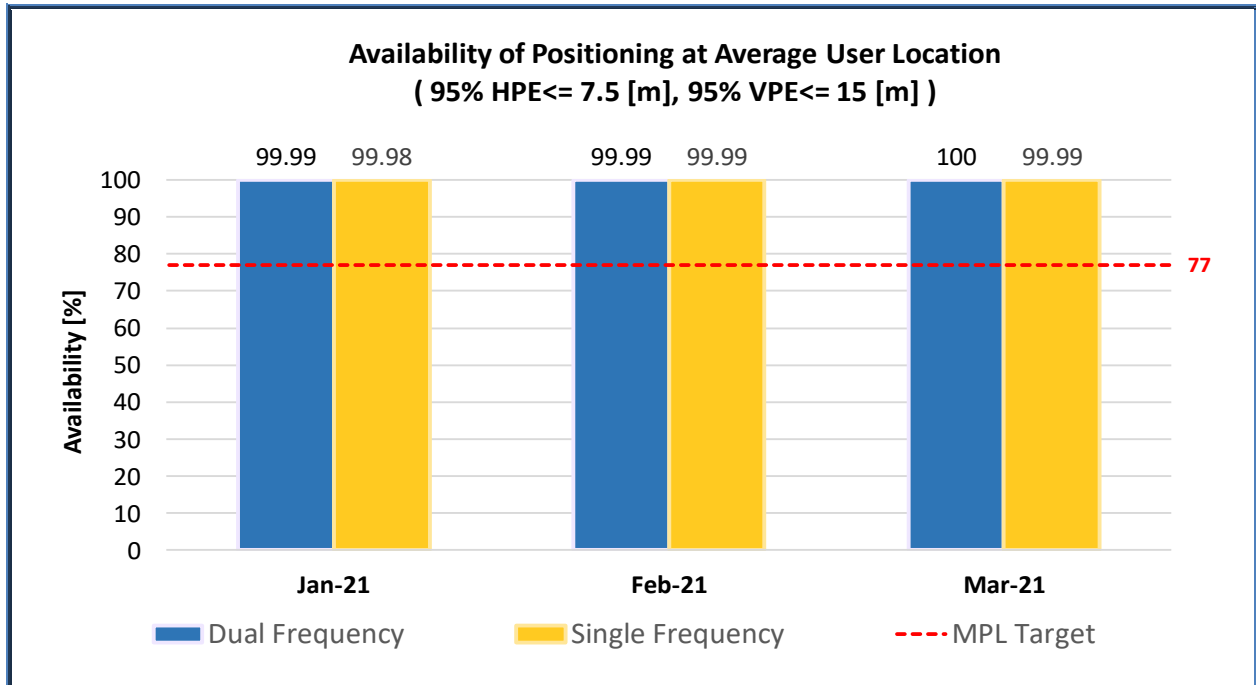


Figure 18 : Availability of Positioning at Average User Location (AUL)

5.3 GALILEO MEASURED POSITIONING PERFORMANCE

Although the Galileo FOC constellation is not yet completely deployed, since May 2019 the 3D Positioning Service achievable with the Galileo system is subject to a commitment regarding the Availability for given Positioning Accuracy targets, as reported in the previous section 5.2.

In addition, this section provides Navigation Sensor Error estimates for a full (3D) solution of Navigation equations, i.e.: the Horizontal and Vertical Positioning Accuracy performance based on real measurements, collected over a number of test receivers, solving for user coordinates with a constraint of $PDOP \leq 6$ and following [OS-SDD] recommendations regarding SIS health status and "Age of Ephemeris"²¹.

To this end it is recalled that, as specified in the [OS-SDD], Navigation message coefficients with an "Age of Ephemeris" beyond 4 hours are no longer considered valid, so that ranging observables from the corresponding satellite and signal should not be used for positioning and/or time measurement purposes.

Samples affected by local issues, thus not attributable to Galileo SIS, are no longer included in the reported results, based on the adoption of an automatic outliers detection filtering, which was introduced since January 2020.

In the following figures, the horizontal axis is limited on each plot to a maximum error of 20 metres. Each figure also reports the number of samples exceeding a horizontal or vertical error larger than 20 [m].

Positioning performance is reported considering only satellites in the nominal slots.

²¹ The Time of Ephemeris (t_{0E} in the [OS-SDD]), also called Ephemeris Reference Time (t_{0E} in the [SIS-ICD], section 5.1.1.), is disseminated in the Navigation message, as part of the Precision Ephemeris Set. The terms "Age of Ephemeris" mentioned by the [OS-SDD] and "Time from ephemeris reference epoch" appearing in the [SIS-ICD] are equivalent.

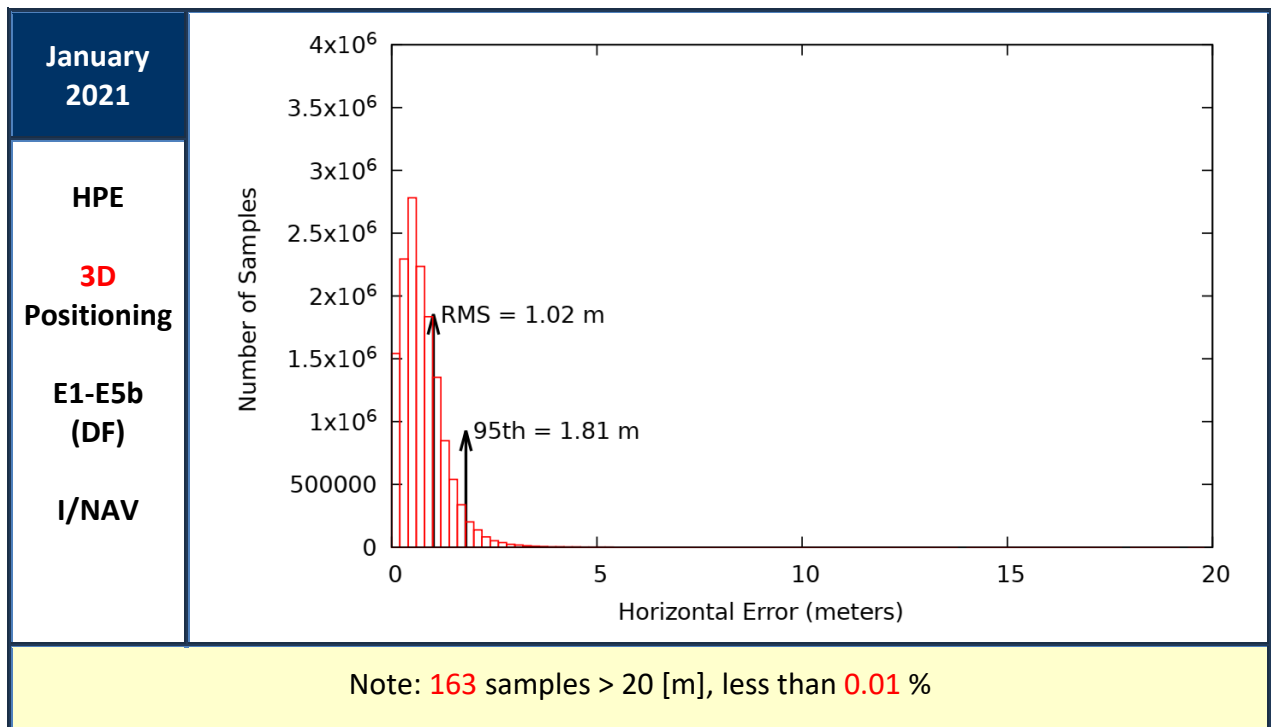
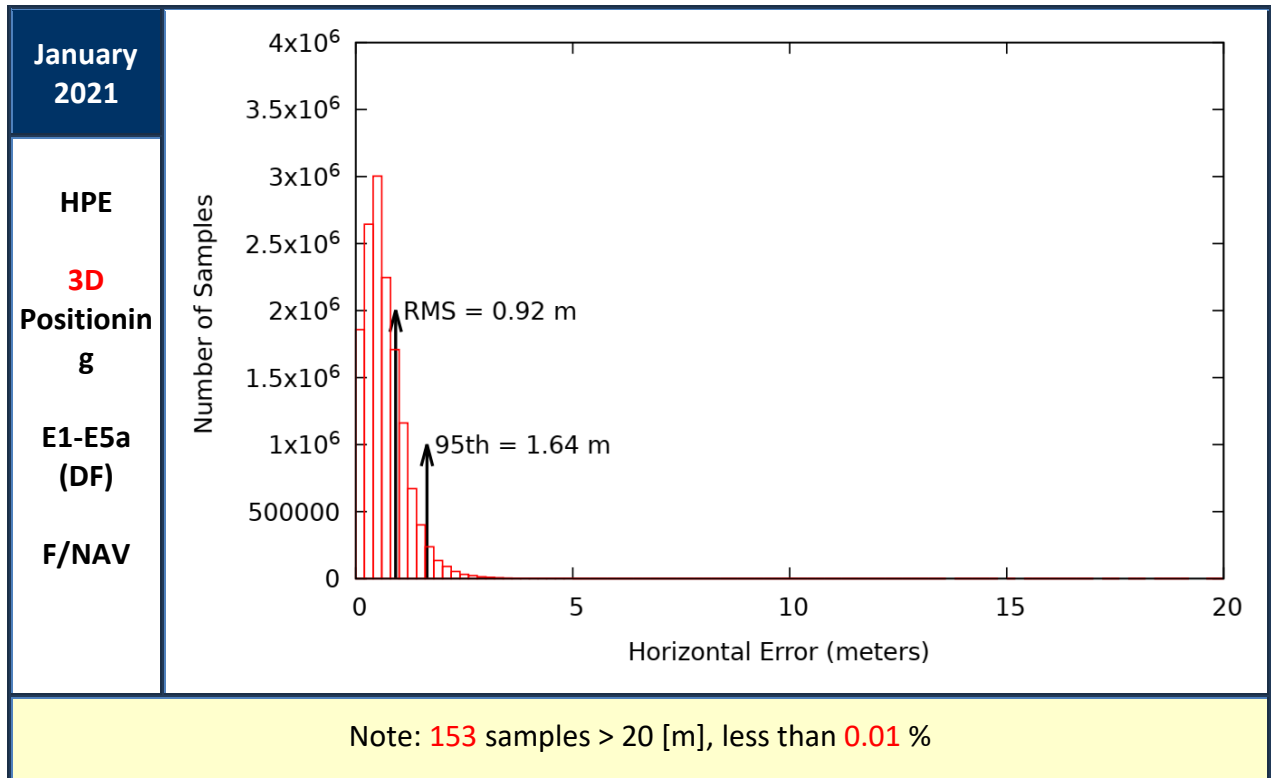


Figure 19 : Horizontal Positioning Error (HPE) for “Galileo-only” users in January 2021

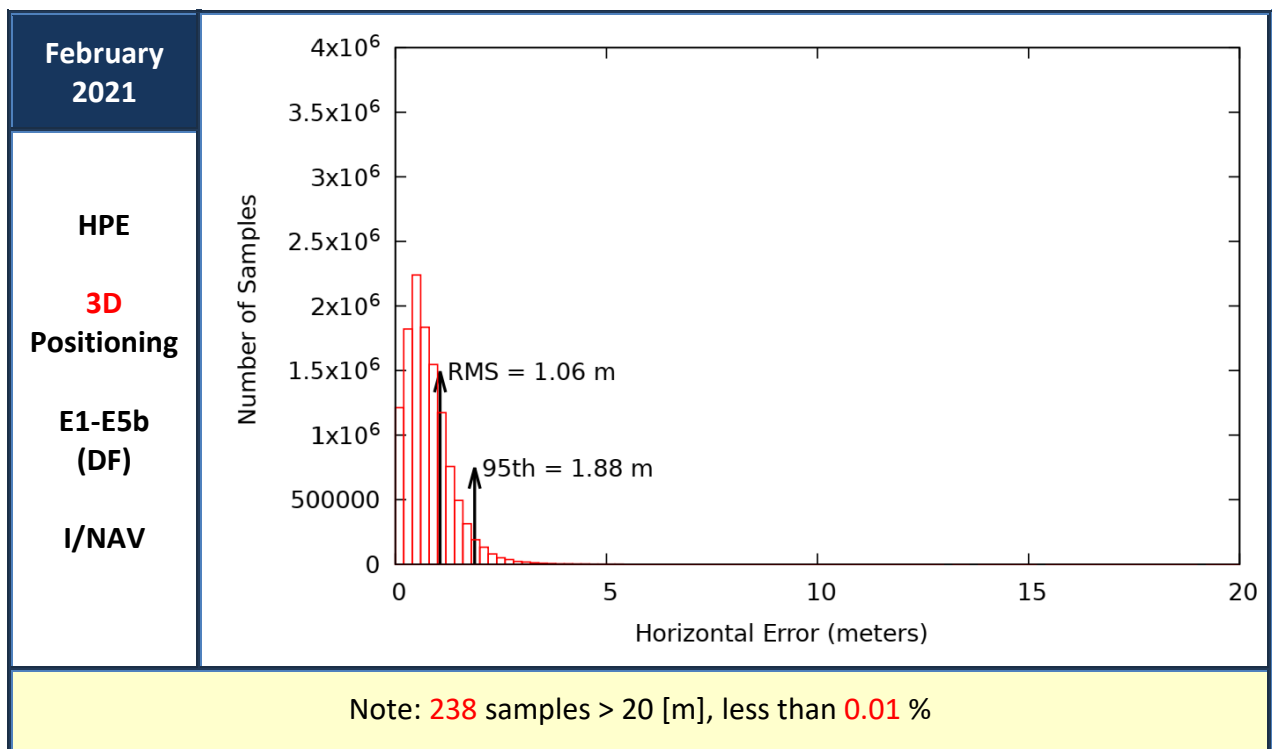
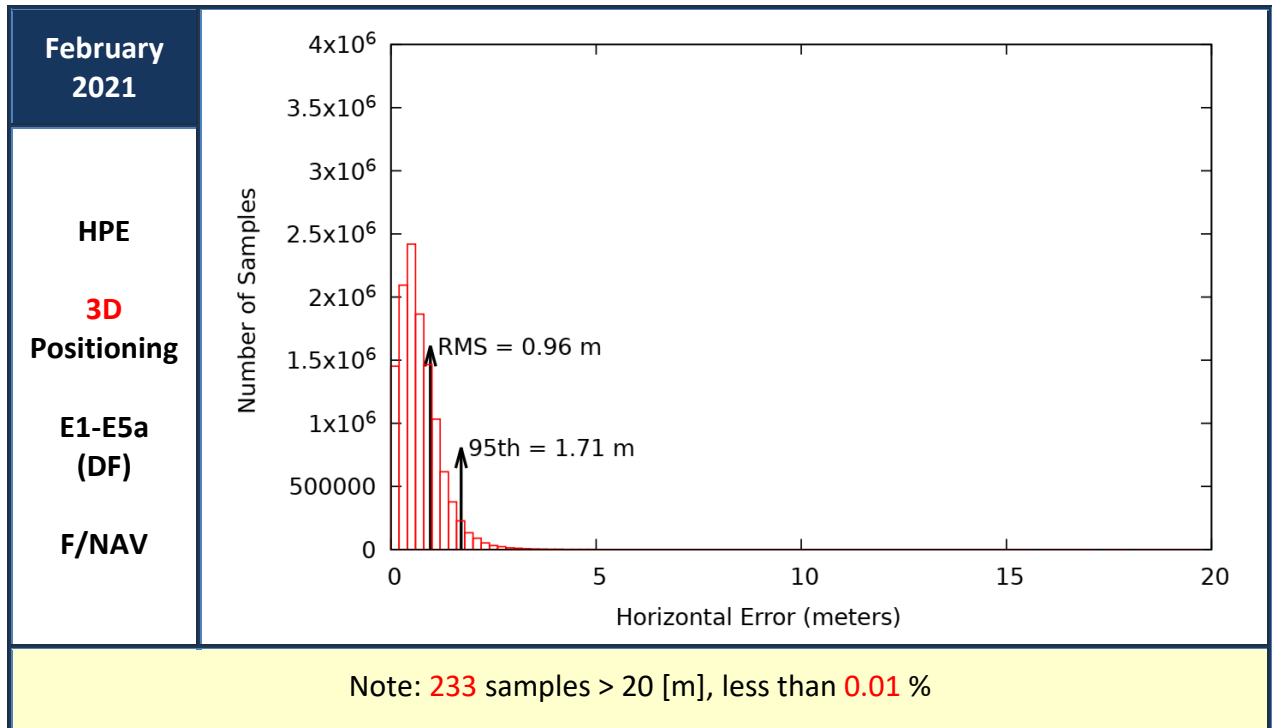


Figure 20 : Horizontal Positioning Error (HPE) for “Galileo-only” users in February 2021

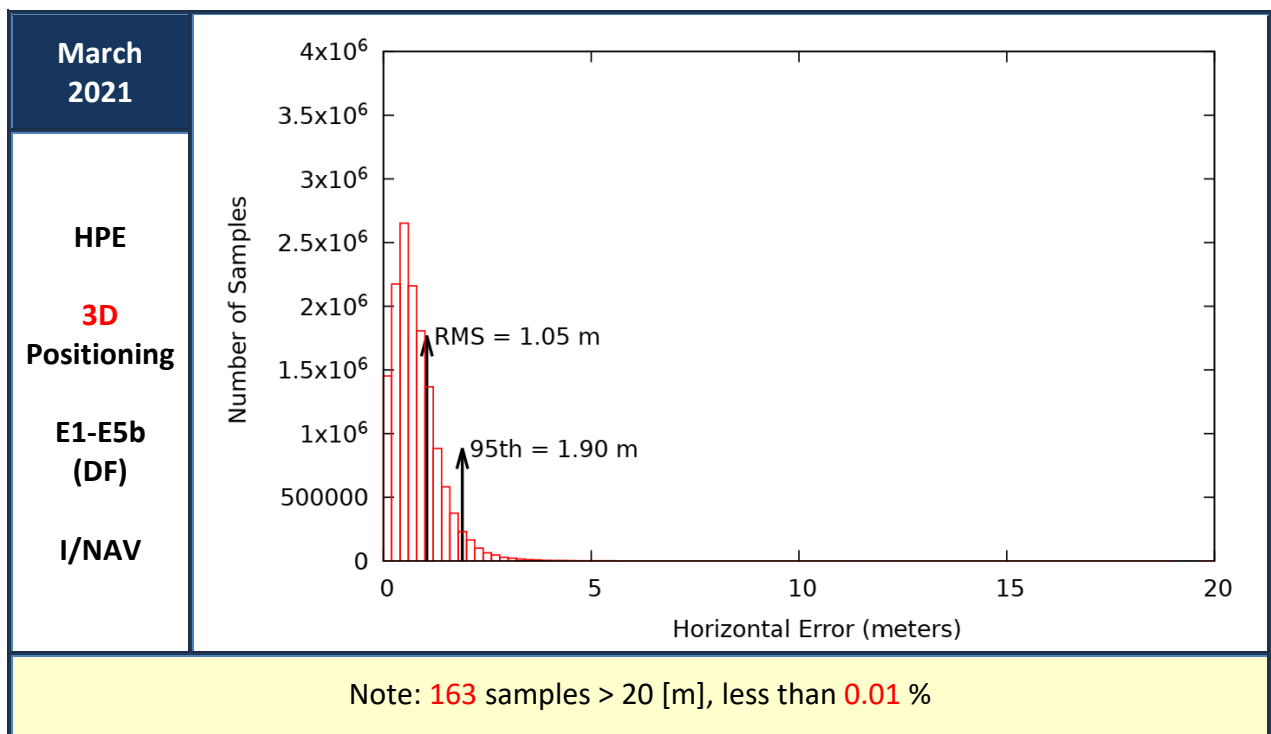
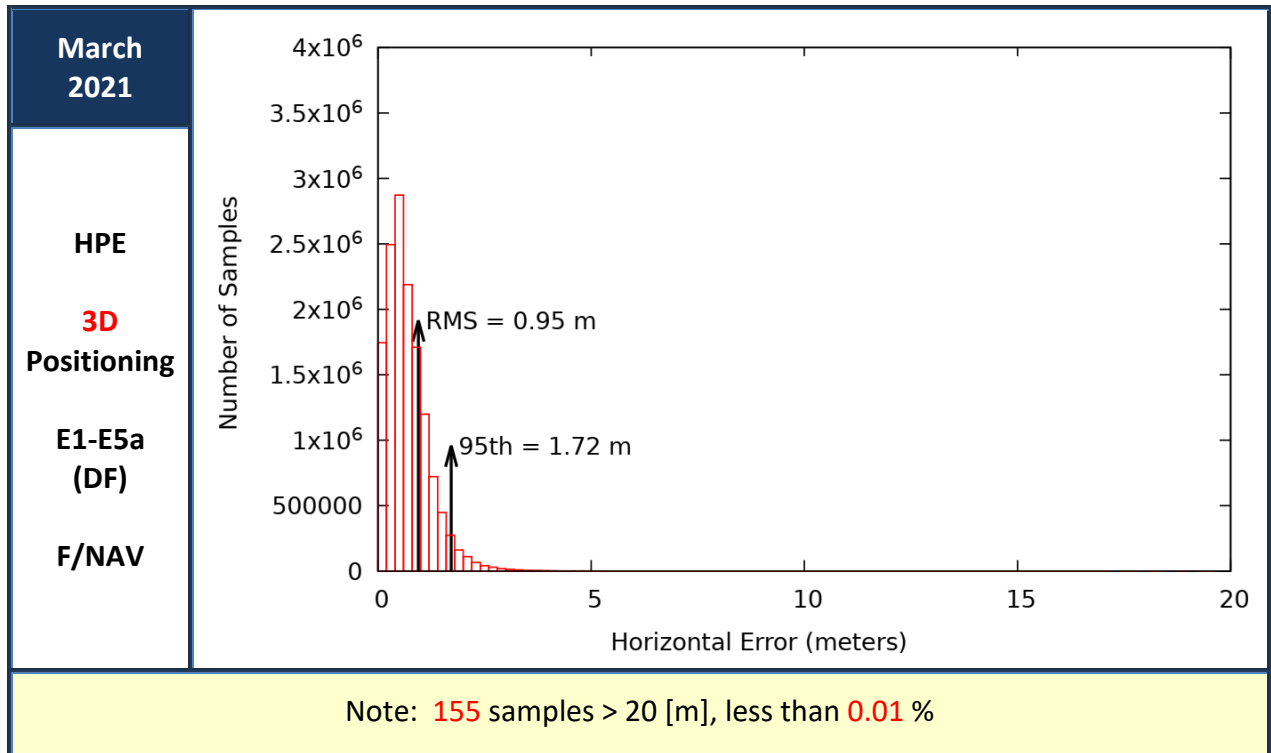


Figure 21 : Horizontal Positioning Error (HPE) for “Galileo-only” users in March 2021

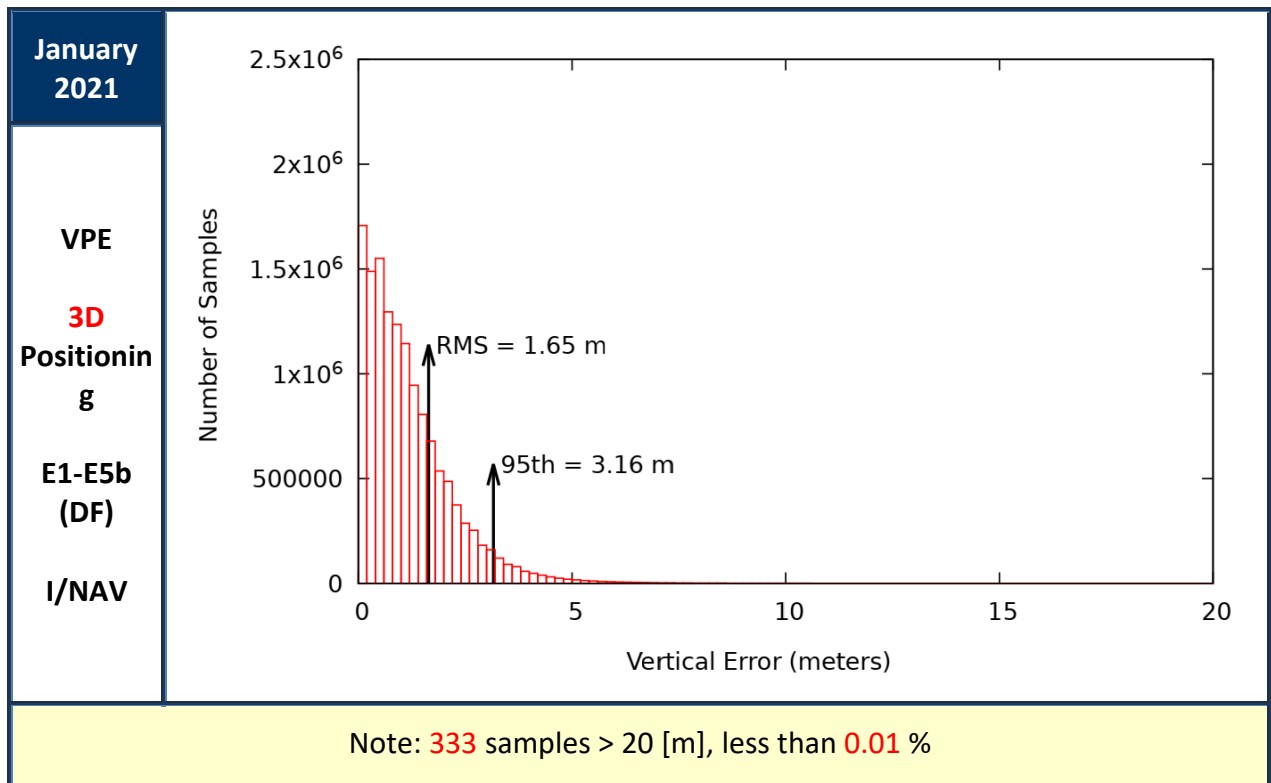
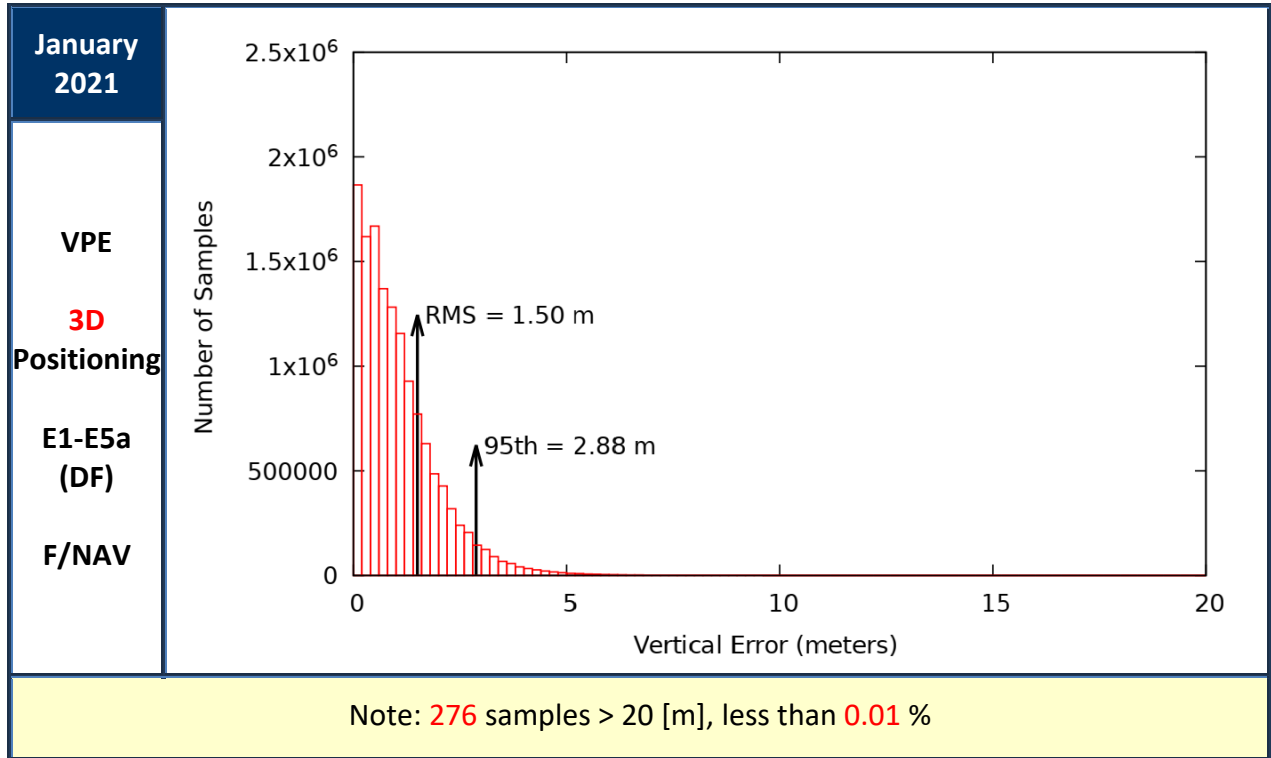


Figure 22 : Vertical Positioning Error (VPE) for “Galileo-only” users in January 2021

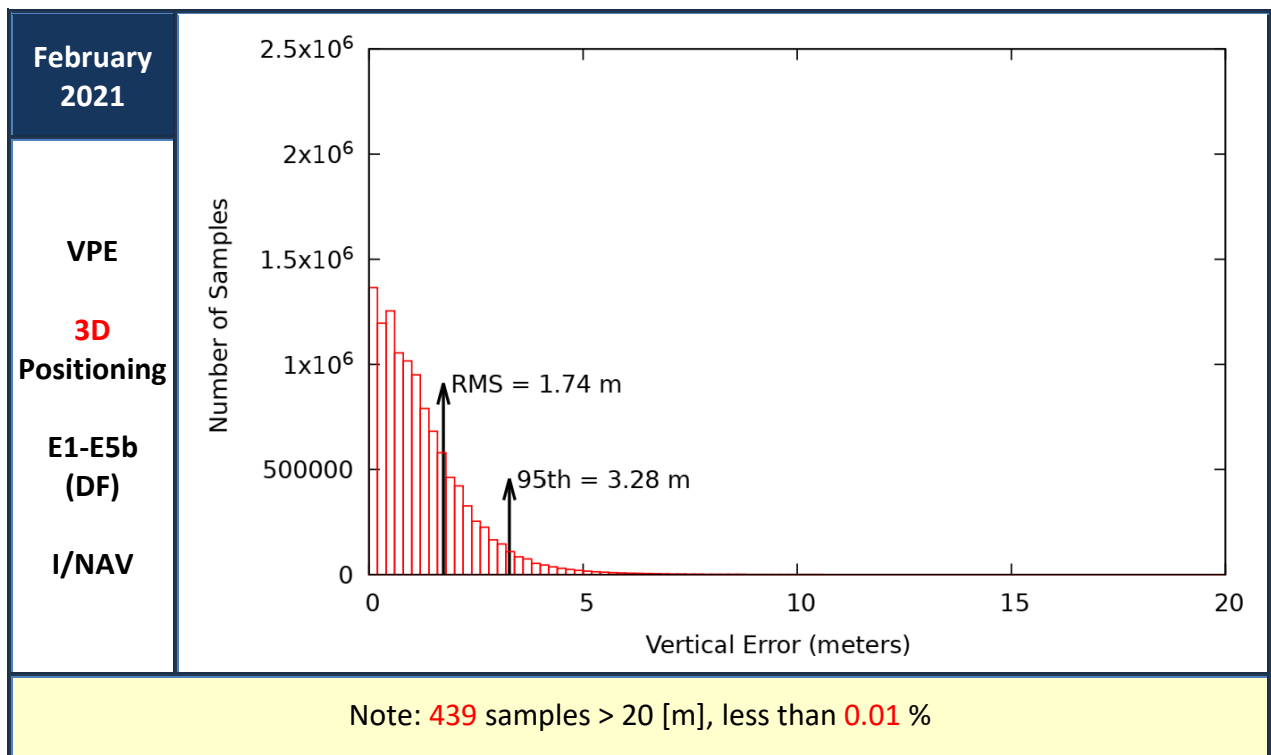
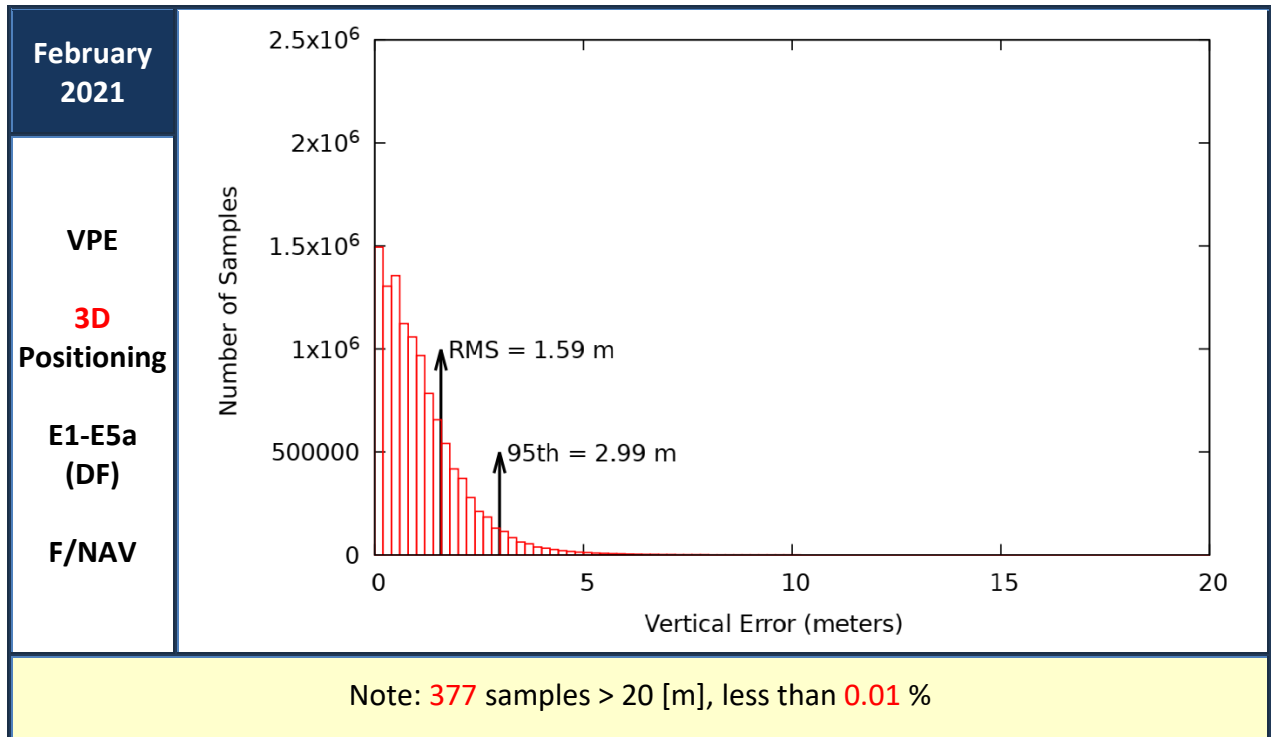


Figure 23 : Vertical Positioning Error (VPE) for “Galileo-only” users in February 2021

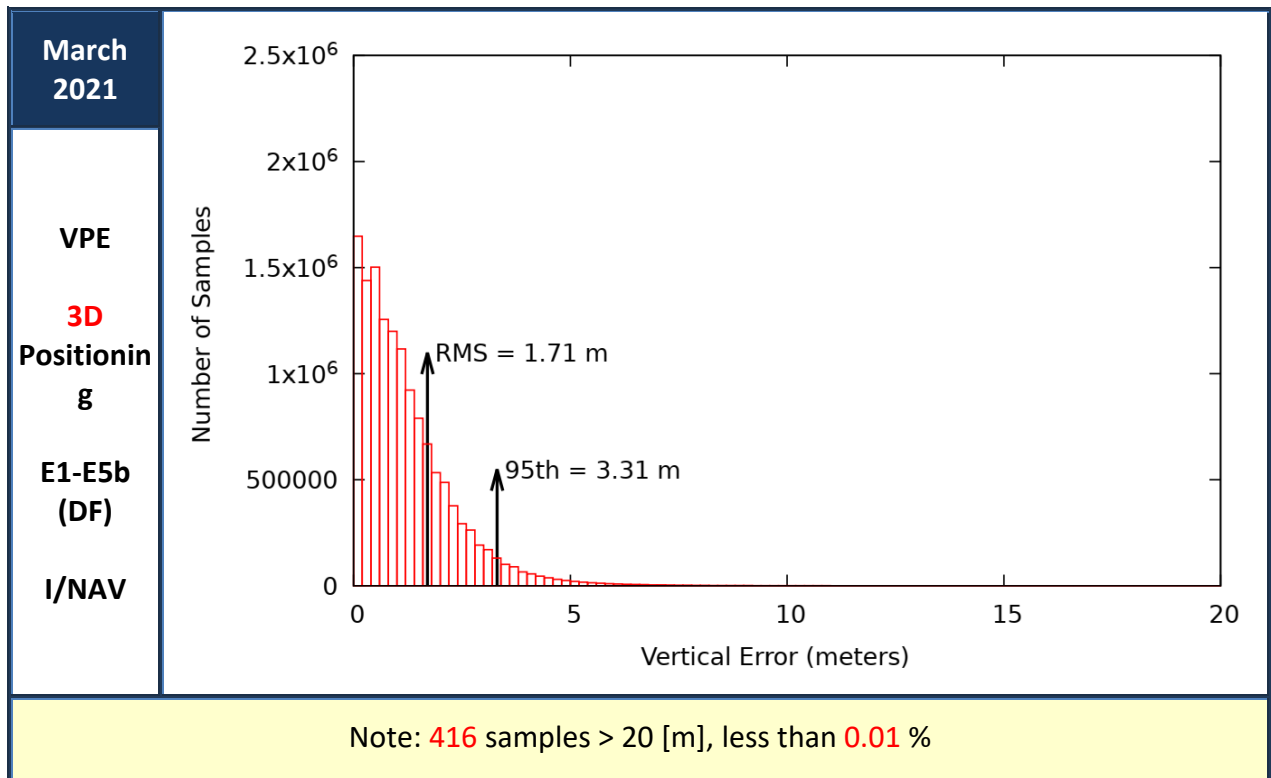
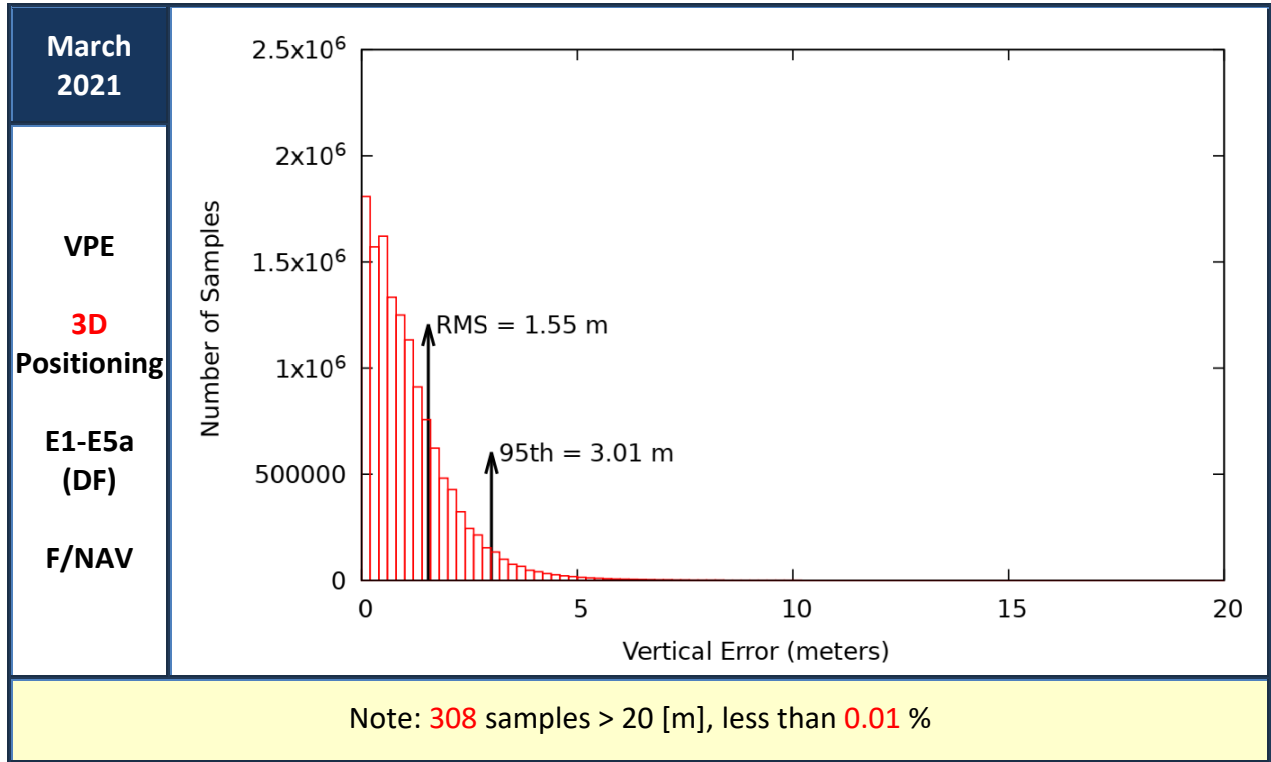


Figure 24 : Vertical Positioning Error (VPE) for "Galileo-only" users in March 2021

6 TIMELY PUBLICATION OF NOTICE ADVISORY TO GALILEO USERS (NAGUS)

The European GNSS Service Centre (GSC) is responsible for timely publication of Notice Advisory to Galileo Users (NAGU) messages on its web pages:

GNSS Service Centre NAGU Publication Service Web Pages	
NAGUs	https://www.gsc-europa.eu/system-status/user-notifications (Active user Notifications)
Information	https://www.gsc-europa.eu/system-status/user-notifications-archive (Archived user Notifications)

Table 5 : GSC web pages for Galileo User Notifications (NAGUs)

According to MPLs in the [OS-SDD], NAGUs related to Planned events need to be published at least 24 hours²² before the event starts. For Unplanned events, the [OS-SDD] specifies a delay of up to 72 hours²² from the detection of the unplanned event until a corresponding NAGU is issued.

The summary of NAGUs that have been published during the reporting period is as per the following Table 6 . NAGU publication timeliness requirements were met with large margins, as per figures reported in the table.

During the quarter **11** NAGUs have been published: **3** “Planned” and **8** belonging to the “Unplanned” category according to the timeliness computation rules, even if only one of them corresponds to a Service Incident. In particular:

- in **January**, planned operations were scheduled for the on-board maintenance of GSAT-0201 (E18) and of GSAT-0202 (E14), so that four NAGUs have been published to this purpose ([2021003](#) , [2021004](#) , [2021005](#) , [2021006](#)). On the other side, NAGUs [2021001](#) and [2021002](#) are related to the suspended dissemination of GGTO coefficients over 24 hours, which is considered a Service Incident;
- in **February**, only planned operations took place, regarding the on-board maintenance for GSAT-0211 (E02) (ref.: NAGU [2021007](#), issued “a-posteriori”) and the temporary unavailability of GSAT-0201 (E14) and GSAT-0202 (E18) (ref.: NAGU [2021008](#), concerned with both), until further notice, for the reasons explained by the [SvNOTE #5];

²² Ref.: [OS-SDD] issue 1.1, §3.6.1 (Table 21)

- in **March**, an unplanned sequence of orbit manoeuvres hat to be implemented for GSAT-0219 (E36), in order to avert the risk of a collision with a large debris (ref.: NAGUs [2021009](#), [2021010](#), [2021011](#)).

Table 6 provides a summary of published NAGUs during the quarter.

Month	NAGU Type	Reason for publishing	Notice Advisory ID	NAGU Categ.	Timeliness
January	GENERAL (TIMING UNP_UNUFN)	Warning about dissemination of “dummy” GGTO coefficients since 01.01.2021 @ 12:15 UTC	2021001	U	Publication of NAGU occurred 8h:25m (0.352 days) after the recovery
	GENERAL (TIMING USABLE)	Announcing restart of valid GGTO dissemination as of 02.01.2021 @ 12:15	2021002	U	Publication of NAGU occurred 6 hours (0.250 days) after the recovery
	PLN_OUTAGE	Warning about unavailability of GSAT-0201 (E18) starting 18.01.2021 @ 15:00 UTC	2021003	P	Publication of NAGU occurred 77h:15m (3.22 days) before the event
	PLN_OUTAGE	Warning about unavailability of GSAT-0202 (E14) starting 18.01.2021 @ 15:00 UTC	2021004	P	Publication of NAGU occurred 77h:15m (3.22 days) before the event
	USABLE	Announcing usability of GSAT-0201 (E18) starting 20.01.2021 @ 15:14 UTC	2021005	U	Publication of NAGU occurred 22h:03m (0.917 days) after the recovery
	USABLE	Announcing usability of GSAT-0202 (E14) starting 20.01.2021 @ 15:12 UTC	2021006	U	Publication of NAGU occurred 22 hours (0.919 days) after the recovery
February	UNP_SHTRCVR	Telling a-posteriori the recovered usability after short maintenance of GSAT-0211 (E02), as of 10.02.2021 @ 22:29 UTC	2021007	U	Publication of NAGU occurred 18h:07m (0.755 days) after the recovery
	GENERAL	Announcing the temporary unavailability of Auxiliary satellites GSAT-0201 (E14) and GSAT-0202 (E18), since 18.02.2021 @ 09:30 UTC	2021008	P	Publication of NAGU occurred 44h:15m (1.84 days) before the event

Month	NAGU Type	Reason for publishing	Notice Advisory ID	NAGU Categ.	Timeliness
March	UNP_ UNUFN	Warning about unavailability of GSAT-0219 (E36) since 05.03.2021@ 22:17 UTC (emergency collision avoidance orbit manoeuvre)	2021009	U	Publication of NAGU occurred before the unplanned event
	EXTNS	Extending unavailability of GSAT-0219 (E36) until estimated recovery on 19.03.2021 @ 15:35	2021010	U	Publication of NAGU occurred 2h:8m (0.089 days) after decision taken by the Mission Manager
	USABLE	Announcing the recovered usability of GSAT-0219 (E36) starting 19.03.2021 @ 09:51 UTC	2021011	U	Publication of NAGU occurred 4h:34m (0.190 days) after the recovery

NAGU Categorisation for timeliness evaluation: "P" = Planned, "U" = Unplanned

Table 6 : NAGUs published during 1st Quarter of 2021

7 REFERENCES

This section identifies the documents explicitly referenced in this Galileo Open Service Public Performance Report.

- [SIS-ICD] European GNSS (Galileo) Open Service Signal-In-Space Interface Control Document ([OS-SIS-ICD](#)), Issue 2.0, European Union, January 2021
- [IONO] [Ionospheric Correction Algorithm](#) for Galileo Single Frequency Users, Issue 1.2, European Union, September 2016
- [OS-SDD] European GNSS (Galileo) Open Service Definition Document ([OS-SDD](#)), Issue 1.1, European Union, May 2019.
- [SvNOTE #4] [Service Notice #04](#) - Use of the Galileo satellites GSAT-0201 and GSAT-0202
- [SvNOTE #5] [Service Notice #05](#) - Unavailability of the Galileo Auxiliary satellites GSAT-0201 and GSAT-0202

Previous documents are available to users through the web portal of the European GNSS Service Centre (<http://www.gsc-europa.eu/>), with the exception of Issue 1.0 of the OS-SDD.

IMPORTANT NOTE

Issue 1.1 of the [OS-SDD] is in force since May 2019. This version is accessible for download from the European GNSS Service Centre (GSC) website.

The previous OS-SDD version (Issue 1.0) can still be obtained from the GSC, upon user request.

Issue 2.0 of the [SIS-ICD] is in force since January 2021.

For an exhaustive description of the Minimum Performance Levels (MPLs), the reader is referred to the [OS-SDD]. Individual sections of the [OS-SDD] have been referenced throughout this report when referring to MPL target values.

8 LIST OF ACRONYMS

Acronym	Definition
AUL	Average User Location
DF	(Galileo OS) Dual Frequency combination (E1/E5a, E1/E5b)
DOP	Dilution of Precision
ECEF	Earth Centred, Earth Fixed frame coordinates
F/NAV	Navigation message provided by the E5a signal [SIS-ICD]
FOC	Full Operational Capability
GSA	European Global Navigation Satellite Systems Agency
GGTO	GST-GPS Time Offset
GMS	Galileo Mission Segment
GPS	Global Positioning System
G/S	Ground Segment
GSC	European GNSS Service Centre
GST	Galileo System Time
HDOP	Horizontal Dilution of Precision
HPE	Horizontal Positioning Error
ICD	Interface Control Document
I/NAV	Navigation message provided by the E1-B and E5b signals [SIS-ICD]
IS	(Galileo) Initial Services
MPL	Minimum Performance Level
NAGU	Notice Advisory to Galileo Users
OS	(Galileo Navigation) Open Service
PDOP	Position Dilution of Precision
SBDO	StandBy Duty Officer
SDD	Service Definition Document
SDM	Service Delivery Manager
SF	(Galileo OS) Single Frequency (E1, E5a, E5b)
SIS	Signal in Space
SISE	Signal In Space Error vector (4-dimensional)
SNGU	Service Notice to Galileo Users
toE	Time of Ephemeris
UTC	Universal Time Coordinated
VPE	Vertical Positioning Error
WUL	Worst User Location



End of Document



European GNSS Service Centre:
<https://www.gsc-europa.eu/>